



werkzeugtechnik

www.ips-werkzeugtechnik.de

Werkzeugschrank

Maschine
höhen

Hinweis:
Der Arbeitsbereich der Vorrichtung ist durch eine
Vertikalschutztüre von unten und hinten und vorn komplett geschützt.
Oben ist die Vorrichtung offen, jedoch ist auf Grund der Bauweise
und der Position der Schneidwerkzeuge eine Gefährdung auszuschließen.
Die Steuerung ist nur an der Maschine zu betätigen.

INTELLIGENT PUNCHING SOLUTIONS



Start

Reset

Not-A

1000

1040

250

1000



Consulting and Engineering Services //

1

Systems • Machines //

2

Presses • Special Units • Tools //

3

Punching Units //

4

Tools • Reduction Bushes • Strippers //

5

System Extensions //


6

Small Presses //

7

Partner Programs //

8

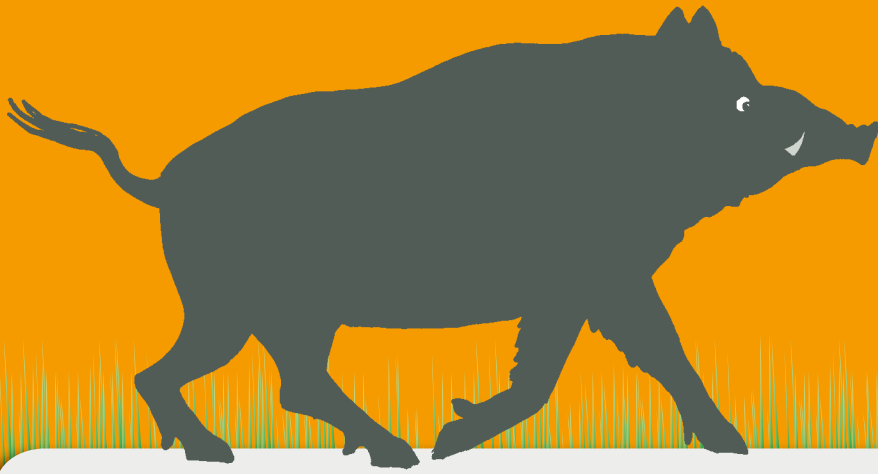

ips – intelligent, strong and quick ...

// Wild Boar Goulash

- 1 kg wild boar goulash
- 3 tbsp oil
- 150 g streaky bacon
- 2 large onions and 2 garlic cloves
- salt, pepper and 3 tbsp flour
- ¼ litre red wine and ½ litre bouillon or game stock
- 1 tbsp tomato purée
- thyme, rosemary and – just as you like - wild game seasoning
- 1 large can of chanterelles and ½ cup of crème fraîche (sour cream)
- garlic powder



// Cooking

- Wash meat and dry thoroughly. Brown meat in hot oil, then keep warm. Dice bacon and onions and brown them also. Add meat and season with salt and pepper. Add red wine and bouillon, season and braise in a closed casserole about 60 minutes.
- Mix flour and a small bit of water and thicken the boiling sauce with the mixture. Taste and season.
- Heat the drained chanterelles in the sauce and refine with crème fraîche.

// Preparation time

- about 30 minutes, level of difficulty: normal

// Enjoy!



Which punching unit or which punching machine do you need to offer efficient, flexible and reliable solutions for individual customer requirements? **ips-werkzeugtechnik's** job is to find the appropriate solution for you ...

... because **ips** stands for **intelligent punching solutions**. An extensive know-how on both industrial sector and application requirements provide the basis for intelligent solutions. The high-quality tool units in the present catalogue are to a large part the product of this know-how. Depending on the application, these units are ideally suited to be combined and extended to complete systems.

In October 2006, **ips-werkzeugtechnik** took over the punching technology segment of **DE-STA-CO Europe & Co. Werkzeugtechnik**, which has earned us a new strategic position on the market. We have gained many years of professional experience, a tried and tested product range, technological know-how, knowledge on the industrial sectors and a high innovation potential. These strengths are now being enhanced in a team which has long since been working together. The goal of our efforts is to be your first-class supplier for every aspect of the punching process.


Furthermore, we also develop solutions which are tailor-made to your individual requirements. No matter whether you are looking for a single component, a standard application product or a customised special solution: **ips** will provide you with the perfect punching machine to improve your punching productivity. Developed, manufactured and assembled in Germany: high quality products at competitive prices.



Roger Schlitter
Dipl.-Ing./FH, Managing Director

INTELLIGENT PUNCHING SOLUTIONS



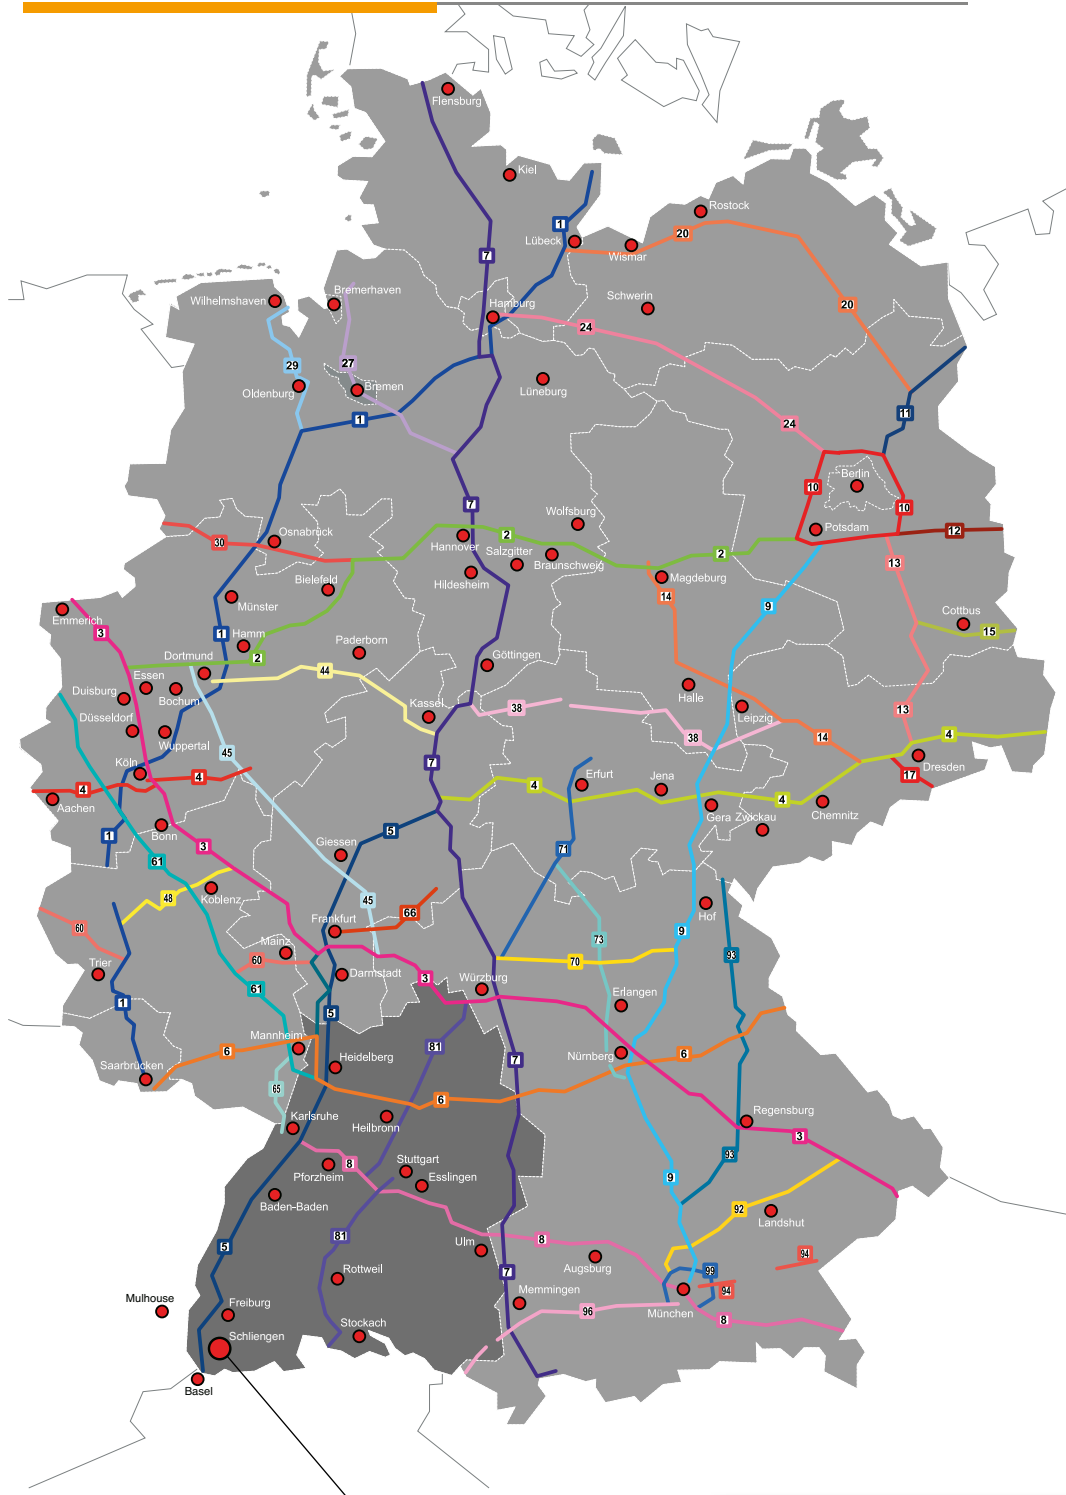

ips-werkzeugtechnik gmbh

Brezelstraße 4

79418 Schliengen · Germany

T +49 (0) 76 35/31 55 - 800

F +49 (0) 76 35/31 55 - 880

info@ips-werkzeugtechnik.de


www.ips-werkzeugtechnik.de



INTELLIGENT PUNCHING SOLUTIONS

INTELLIGENT PUNCHING SOLUTIONS

Consulting and Engineering Services //

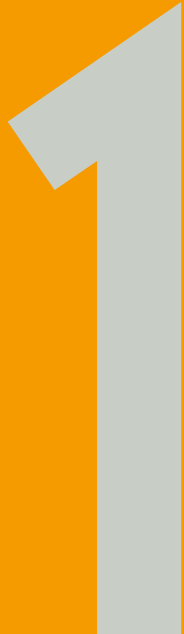


Consulting and Engineering Services //

- // Project management and consulting
- // Manufacturing optimisation with cost reduction
- // Compilation of specifications
- // Design services

We raise questions

- // Is it possible to design a better product with regard to automation?
- // Which dimensional tolerances are necessary?

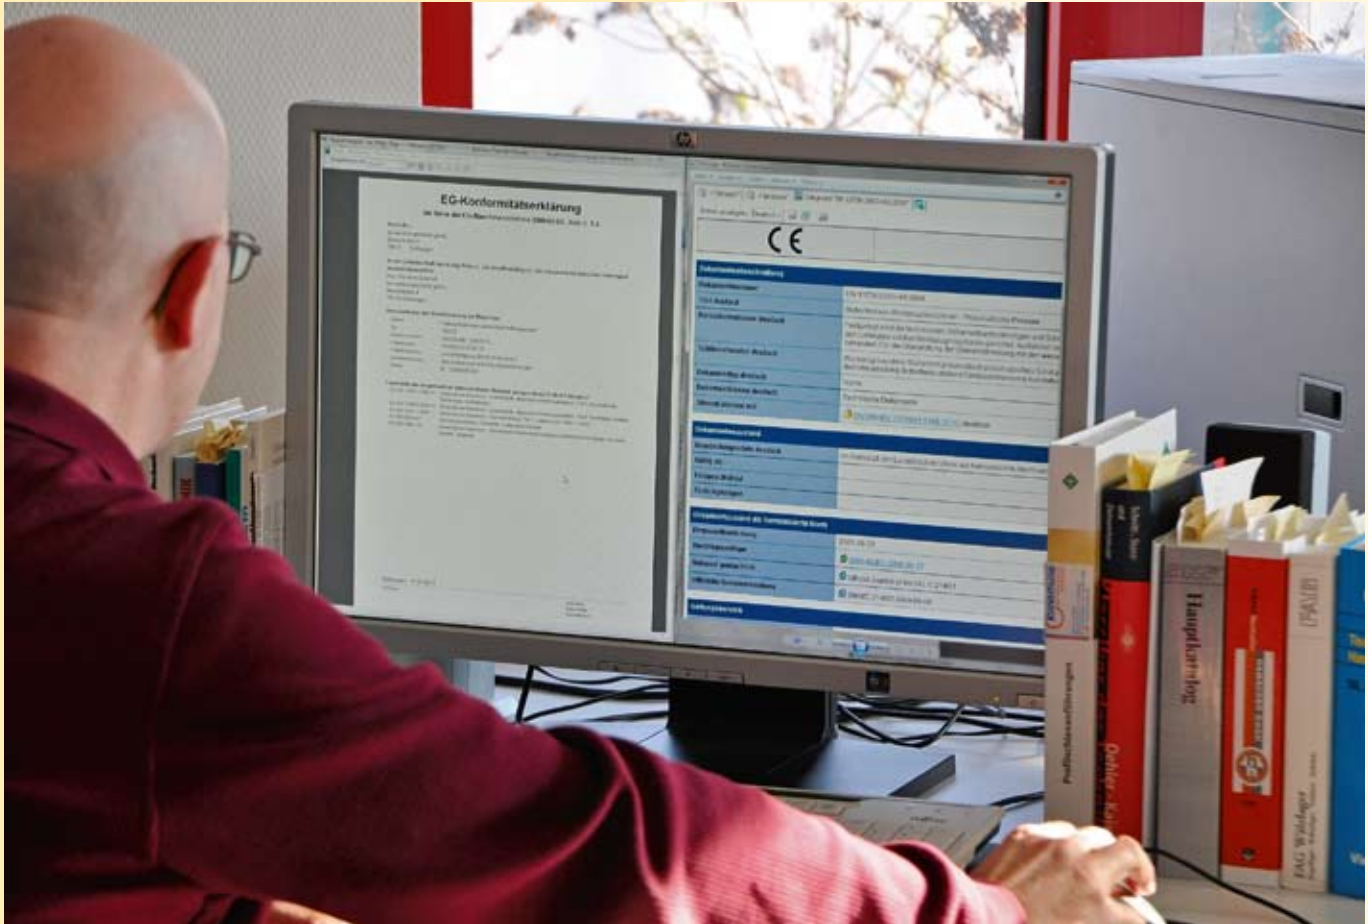

Our consulting services

We search and develop solutions for the specific applications of our customers.

We support you in optimising your products.

We analyse manufacturing sequences and manufacturing processes.

We observe the indicated tolerances and coordinate feasibility with regard to the tools or the unit.

We discuss safety concepts.

We develop ideas for parts handling.

We assist you in the complete planning of the system.

On request, we perform profitability calculations.

Our engineering services

Complete design with SolidWorks including CAD data.

Designs of tools, fixtures, machines, test benches.

Tolerance analysis and agreement on a design concept.

Integrated measuring and testing equipments.

Complete documentation.

CE mark with risk analysis in accordance with the EC Machinery Directive 2006/42/EC.

CE declaration and risk analysis with »Safexpert«

The screenshot displays the Safexpert software interface, which is used for generating CE declarations and performing risk analyses. The top window shows the CE declaration for a machine, including the CE mark, the standard EN 13738:2003+A1:2009, and the CE mark. Below this, there are sections for 'Dokumentation des Herstellers' and 'Dokumentation des Herstellers'.

The middle window shows the 'Risikoanalyse nach EN ISO 14122-1:2007 (Seite 1 von 1)' (Risk analysis according to EN ISO 14122-1:2007 (Page 1 of 1)). It features a tree view on the left with categories like 'Anlagen', '1. Gruppe der Maschine', and '2. Gefährdung mit ...'. The main area contains a table with columns for 'Maßnahmen' (Measures), 'Risiko', 'Risiko', and 'Risiko'. The table lists various safety measures and their corresponding risk levels.

The bottom window shows the 'Safexpert NameManager' interface, which is used for managing safety data. It includes fields for 'Name', 'Subtyp', 'Subgruppe', and 'Subklasse'. Below these fields is a table with columns for 'Filter', 'Risikoart', 'Risiko', 'Risiko', and 'Risiko'. The table lists various risk types and their corresponding risk levels.



Engineering services //



Crimping //



Assembly // insertion //

Stamping //

Laser cutting units //



Pressure assembly //



Punching // cutting off //

Sawing // drilling // milling //



Pipe punching //

Check list for offers – also available at www.ips-werkzeugtechnik.de

1. Customer address

Company name	Contact person, department
Street	Telephone/fax
Postal code, town	E-Mail

2. Material data

Material details:	Tensile strength in N/mm ² :	Material thickness in mm:
-------------------	---	---------------------------

3. Current details

Performance specification available?
Should we supply a quotation for limit stops and guides?
Free form surfaces – adapted tools – please mark <input type="radio"/> yes <input type="radio"/> no
Should we supply a quotation for a complete unit with CE mark?
Which safety equipment is required by the customer? (sliding door activated with both hands / light barrier / operation with both hands)

4. Process data

Cycle time (sec):	Strokes/d:
Shifts: 1 shift/d	2 shifts/d 3 shifts/d

5. Drive and specific data of the unit

press-operated	pneumatic	hydraulic
Nominal pressure in bar	pneumatic	hydraulic
Quotation for hydraulic equipment required? What kind of equipment?		
Quotation for integrated counter required?		
Throat depth in mm:	Feed clearance in mm:	

6. Number of units

7. Part name/project name of the customer

8. Description

ips-werkzeugtechnik gmbh
 Brezelstraße 4
 79418 Schliengen · Germany
 T +49 (0) 76 35 / 31 55 - 800
 F +49 (0) 76 35 / 31 55 - 880
 info@ips-werkzeugtechnik.de

INTELLIGENT PUNCHING

SOLUTIONS

Units • Machines //

2

Units • Machines //

// tailored to your individual requirements

Non-cutting processing

// punching // pressure assembly // stamping // pressing
// insertion // laser cutting ...

Metal-cutting processing

// sawing // milling // drilling
// thread cutting ...

And much more ...

// Insertion and removal by means of pick & place units or robots
// Planning in accordance with the customer performance specification
// Design with SolidWorks
// Control technology in accordance with the latest safety regulations
// CE mark with risk analysis is created by means of SAFEXPERT
software
// Commissioning on customer's premises including after-sales services
// Spare parts supply



Industrial sector:

vehicle registration

Project: 091002

Material: aluminium

Function: Punching of vehicle registration numbers, the distance between holes is adjustable by means of 14 templates.





Industrial sector:

HVAC

Project: 101216

Material: polypropylene (PP)

Function: Serial punching unit for punching mist collectors.
Special features:
– power cylinders can be switched on individually
– punching width is 5 times adjustable by means of a plug-in system
– two-hand safety release





Industrial sector:

automotive industry

Project: 100201

Material: polypropylene

Function: Device for punching the inside lining, indirect lighting.






Industrial sector:

solar industry

Project: 090129

Material: aluminium profile

Function: Punching unit for the processing of solar profiles.
After the punching process, silicone is injected into the sealing joint.

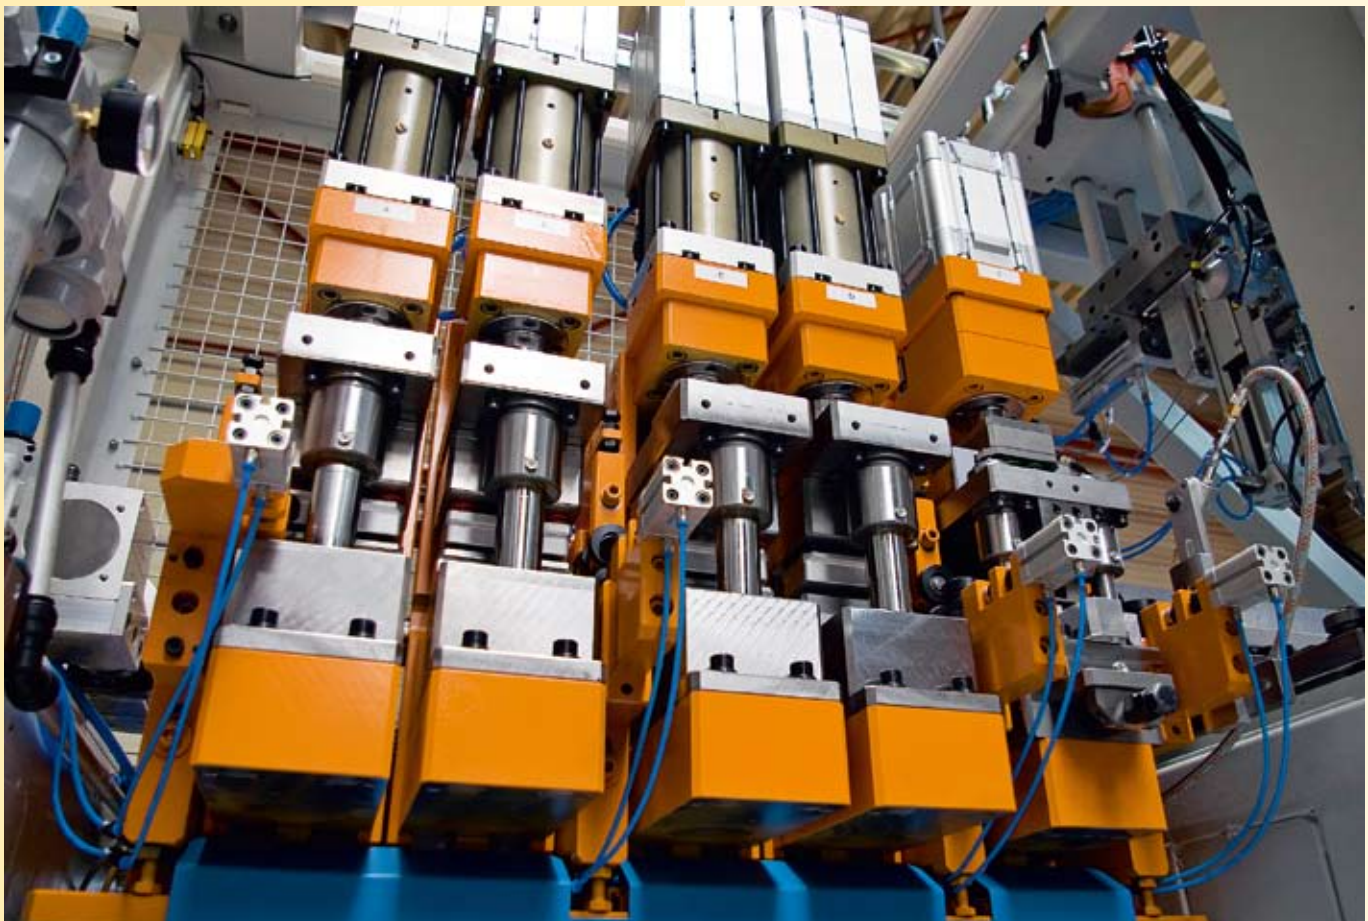




Industrial sector:

furniture industry

Project: 070227

Material: steel tube

Function: Pneumatic pipe punching unit for double-face punching with insertion and reduced insertion.

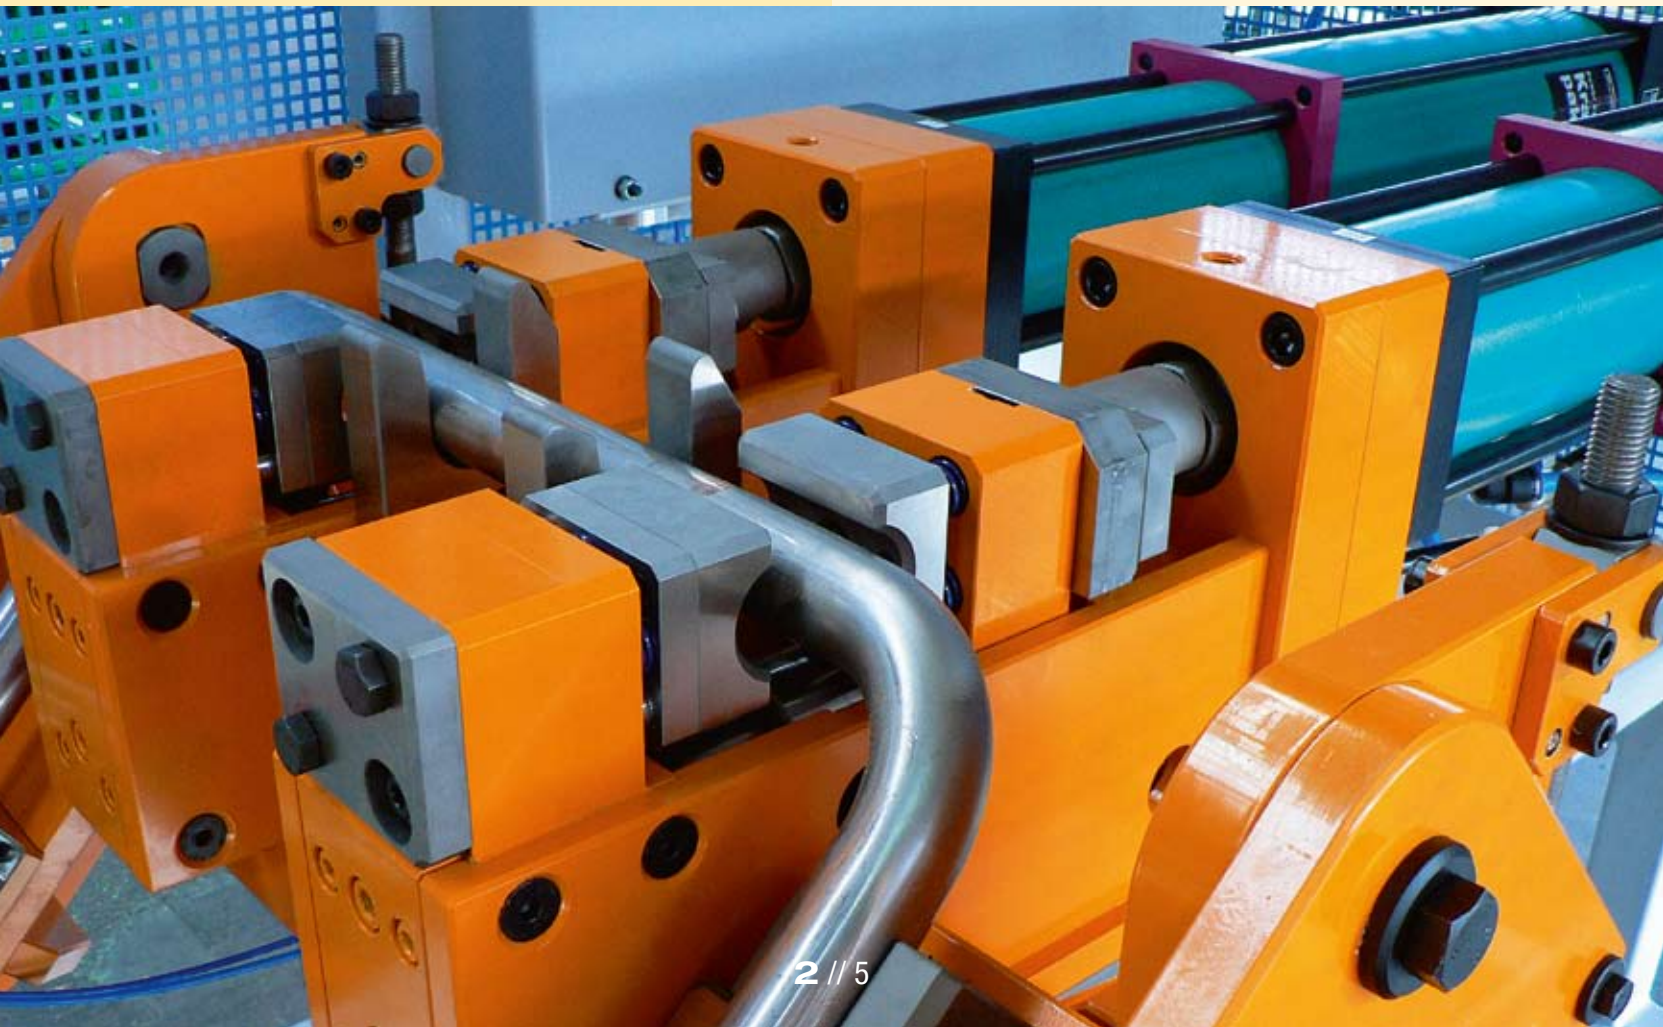



Industrial sector:

vehicle construction

Project: 070214

Function: Unit for punching 3m long profiles.
The unit can be operated from both sides and is equipped with two transmitters for length measurements.


Industrial sector:

solar industry

Project: 090901

Material: aluminium profiles

Function: Special unit (20 x 4 m) for the processing of solar profiles: sawing, punching, nose forming and knurling of six different profiles.

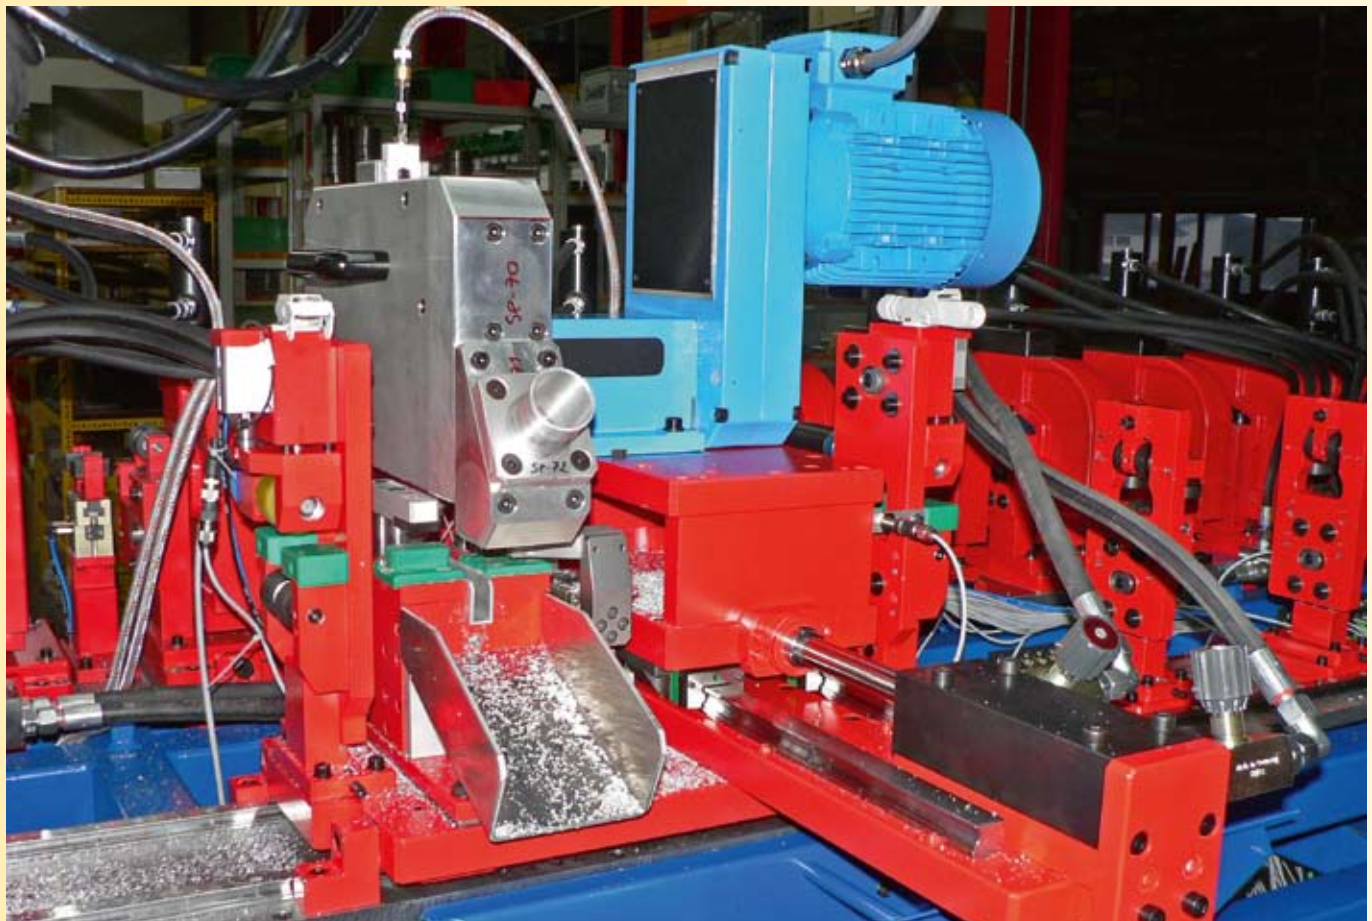



Industrial sector:

automotive industry

Project: 090126

Material: PP with fabric lining

Function: Punching unit for D-column covering.





Industrial sector:

automotive industry

Project:

090127

Material:

compound material

Function:

Unit for punching the Partronic cutout in the inside roof lining.



Industrial sector:

automotive industry


Project: 080326

Material: PP

Function: Unit for punching the tank cap cutout in the rear mudguard.





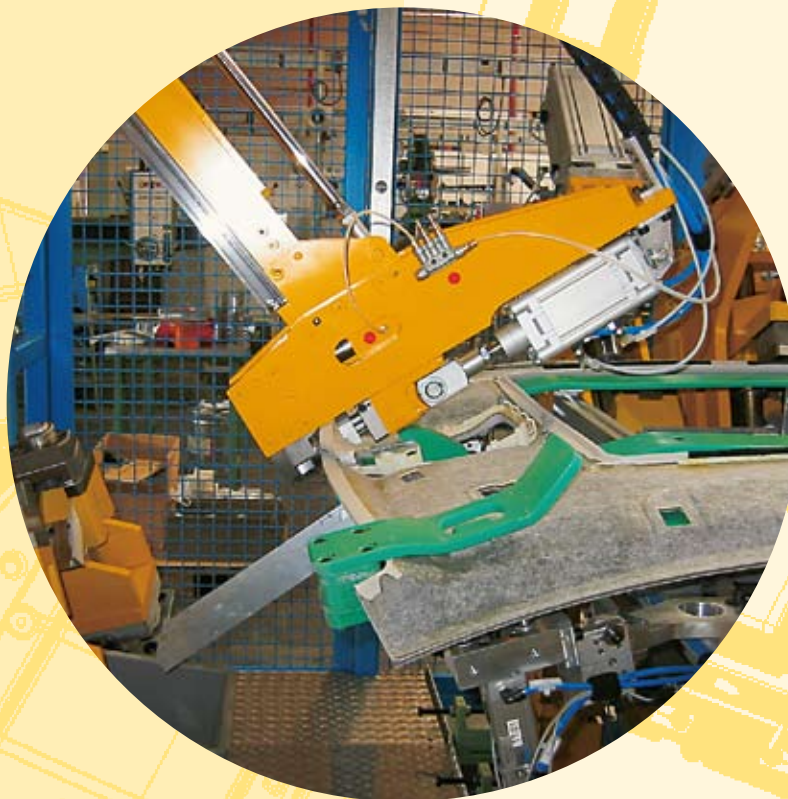

Industrial sector:

automotive industry

Project: 030715

Material: compound

Function: Pneumatically operated punching unit for cutting hole profiles in the inside roof lining of vehicles: make-up, Parctronic, array, window bag, reading lamp, rains sensor. The special unit can be controlled by the SAP software of the customer. The unit ensures positioning and identification of the inside roof lining blanks before starting the required working cycle.

INTELLIGENT PUNCHING SOLUTIONS

Presses • Special Units • Tools //

3

Presses · Special Units · Tools //

Non-cutting processing

// punching // pressure assembly
// stamping // crimping // insertion
// laser cutting ...

Special units

// drive
// hydraulic
// pneumatic
// hydropneumatic
// servo motor

Presses up to 1,000 KN

// pneumatic
// hydraulic
// hydropneumatic
// servo drive

Metal-cutting processing

// sawing
// milling
// drilling
// thread cutting

And much more ...

// sawing unit – according to
customer's requirements
// drilling-milling unit – according
to customer's requirements
// thread cutting unit
on request


Industrial sector:

machine tools

Project: 100628

Material: S 235 JRG 2C

Function: Special press unit for notching, pulling and cutting off, 2 x 700 KN plus 1 x 100 KN.

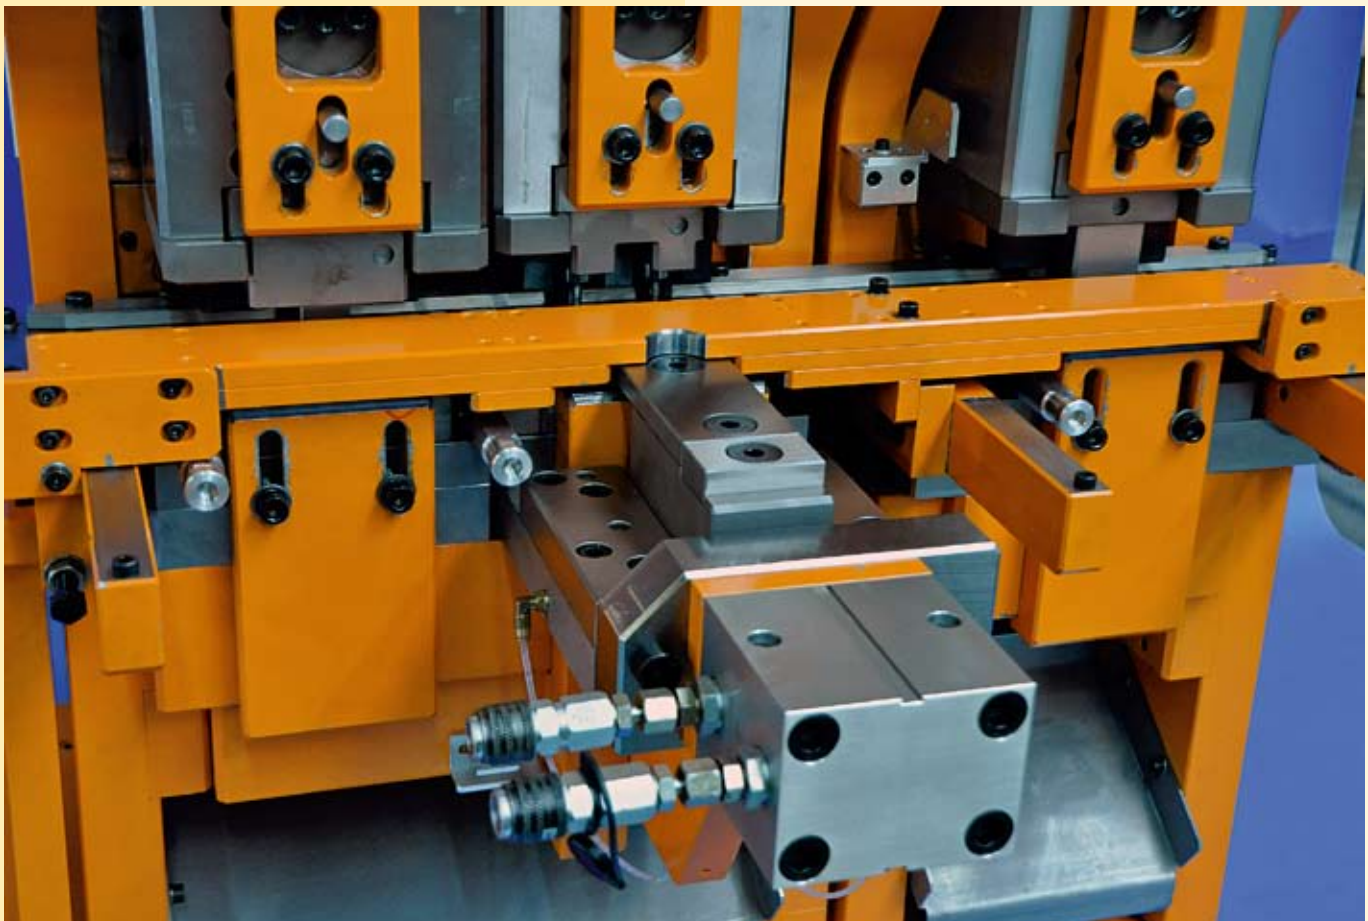



Industrial sector:

automotive supplier

Project: 080625

Material: deep-drawing sheet

Function: Pressing tool for solenoid valve – Volvo.



Industrial sector:

ventilation industry


Project: 071204

Material: steel sheet

Function: Press unit for punching round blanks, the number of strokes is 450 H/min.

Adjustable parameters:

- round blank diameter
- division
- speed

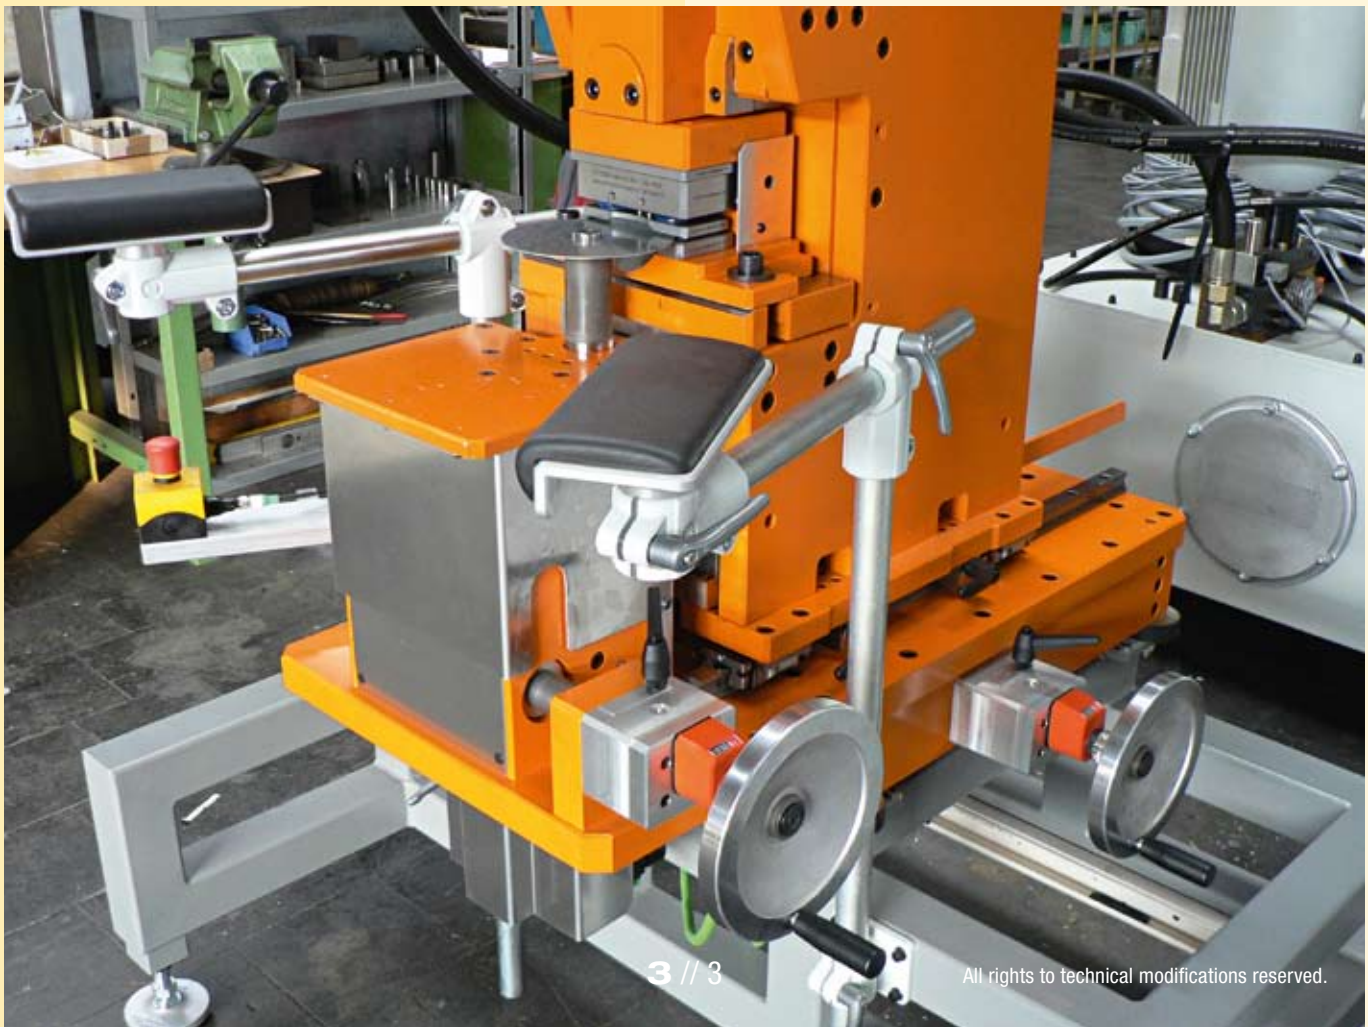


Industrial sector:

construction industry

Project: 060418

Material: steel wire B 500 / 7

Function: Special hydraulic unit for bending wires (\varnothing 8 – 10mm);
the angle accuracy can be adjusted.

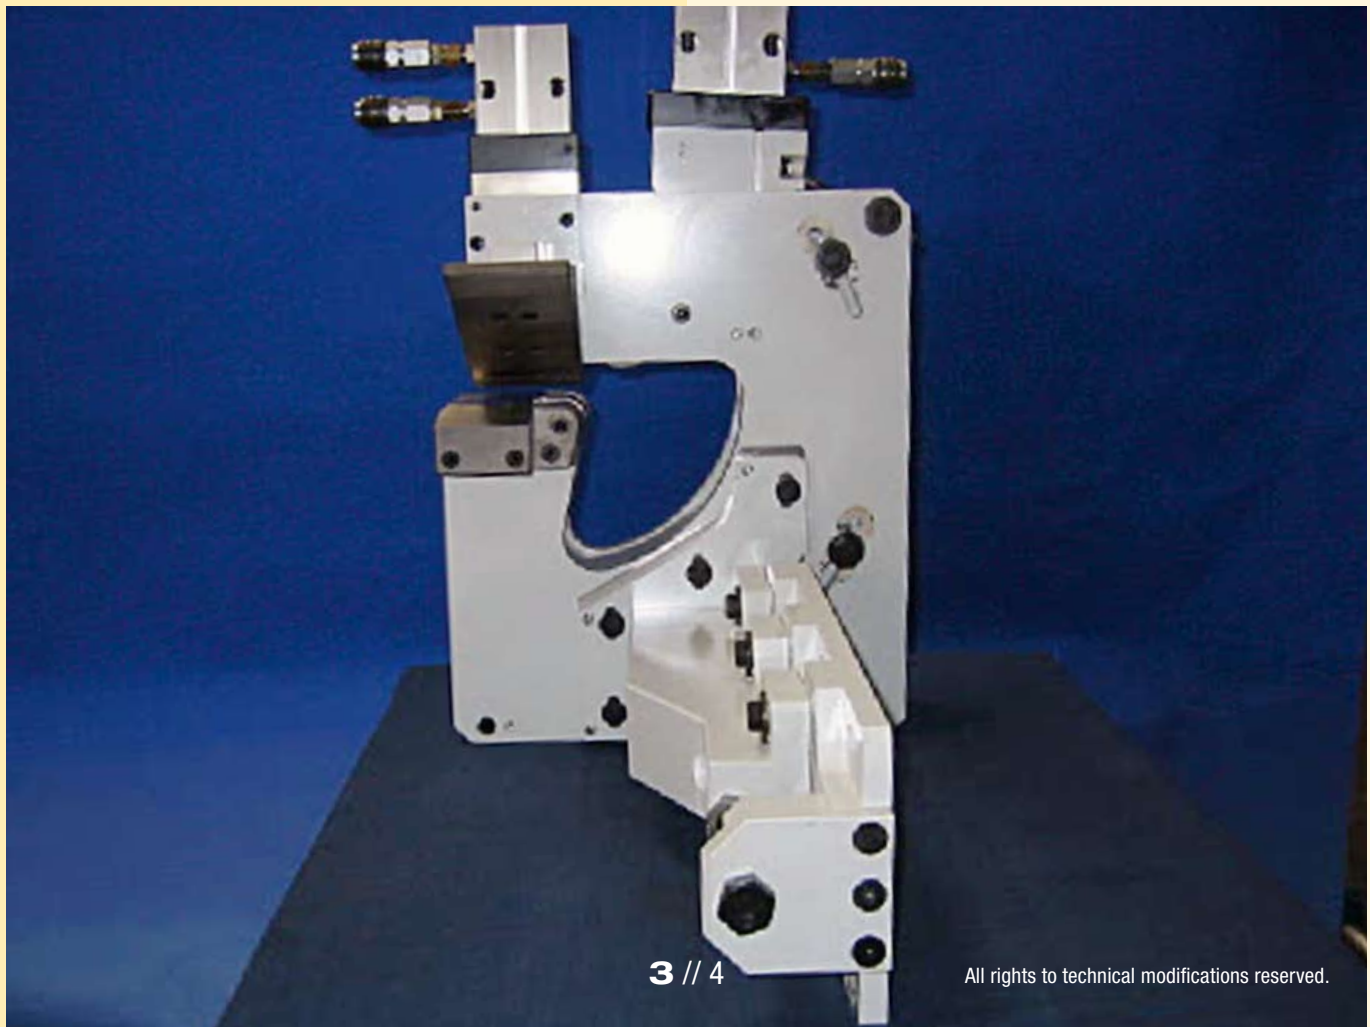




Industrial sector:


construction industry

Project: 080318

Material: steel cable with pressing bush

Function: Unit for pressing steel cables.
The hydraulic crimping press has a pressure force of 2,700 kN.

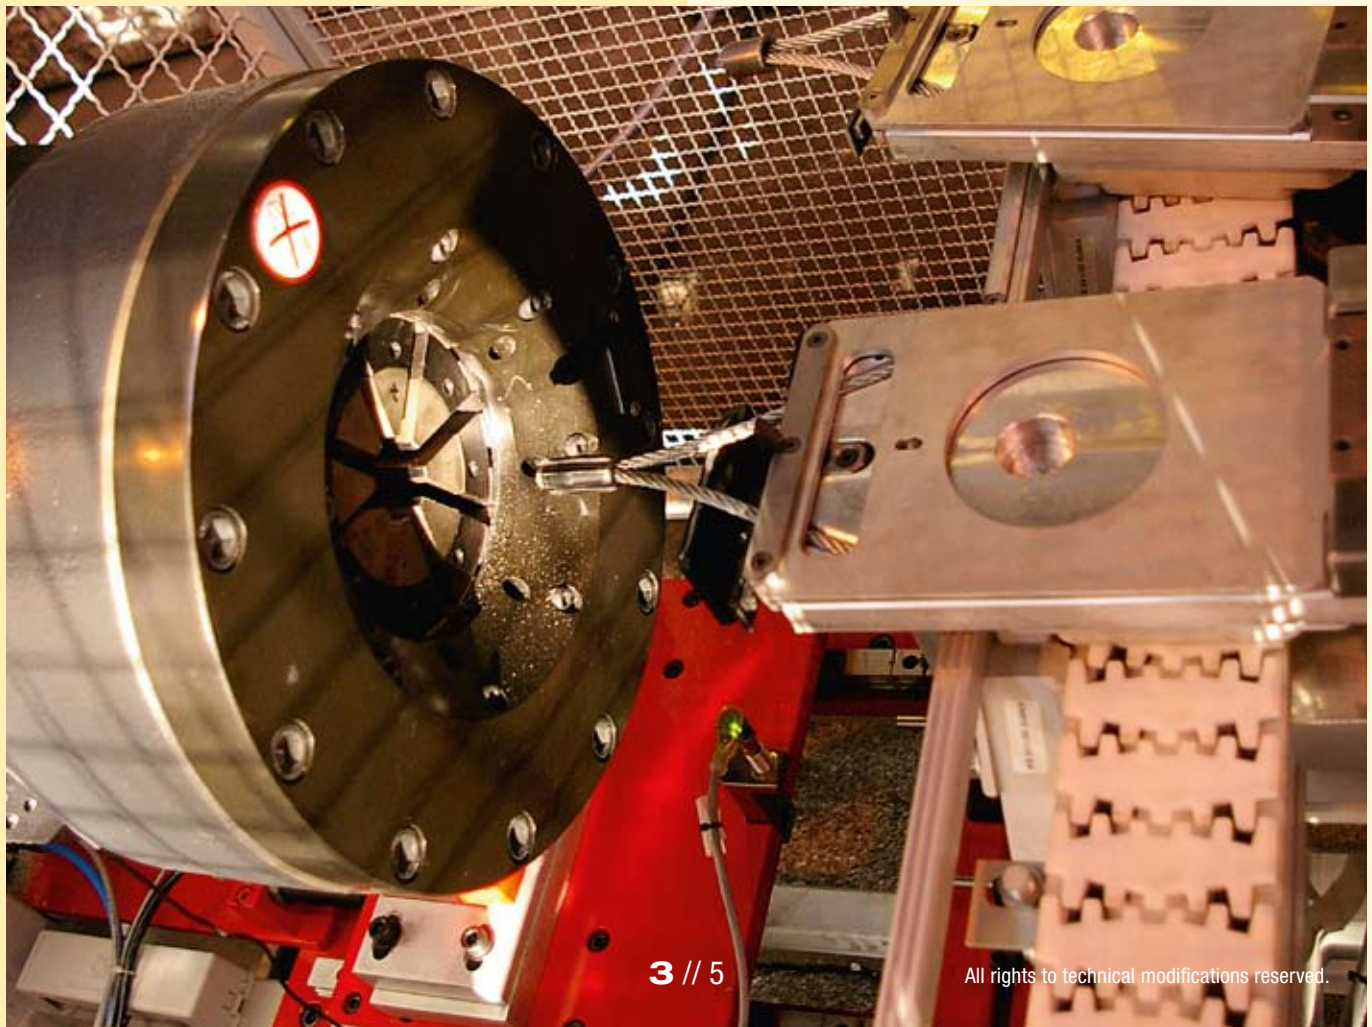

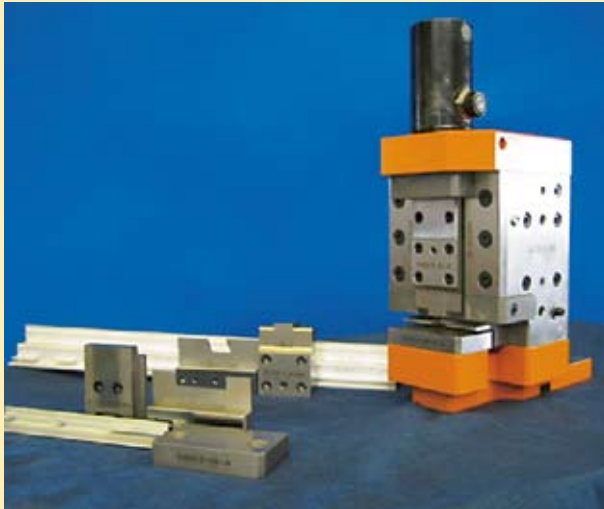



Industrial sector:

vehicle construction

Project: 040313

Material: aluminium extruded section

Function: Special hydraulic unit.
The die is flexibly mounted so that it is possible to notch an intermediate bar in the aluminium profile.

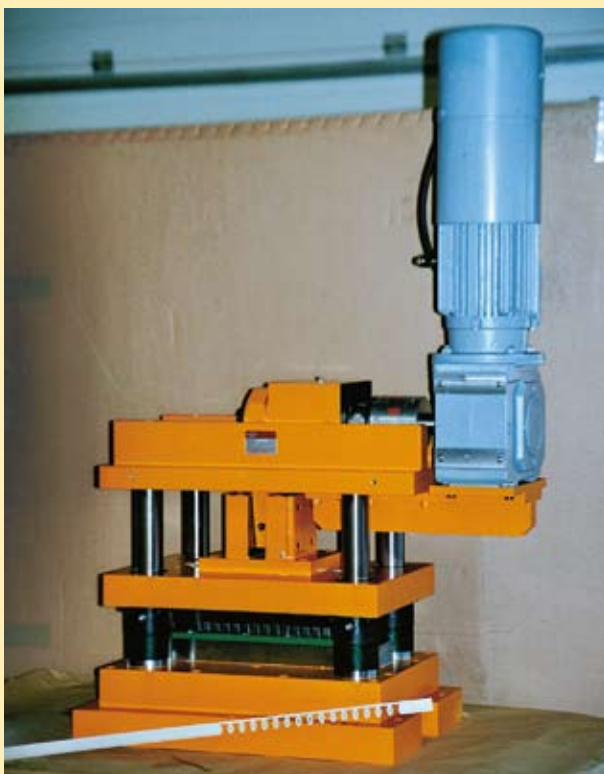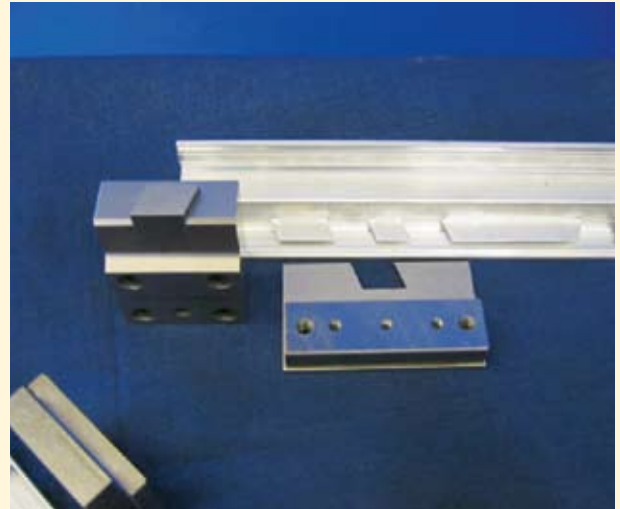

Industrial sector:

metal constructions

awnings, doors, window construction, conservatory, door profiles etc.

Project: 001001

Material: aluminium extruded section

Function: Electrically operated punching press with integrated notching tool.
The pressure force is 7 t for 60 working cycles.



Industrial sector:

automotive industry

Project: 000731

Material: steel sheet

Function: Special pneumatic unit for punching holes with \varnothing 12 mm into a steel sheet. The unit is mounted on a base plate by means of linear guides and is led to the workpiece from X/Y directions. The punchings are removed by means of a hose connected with a »venturi nozzle«.

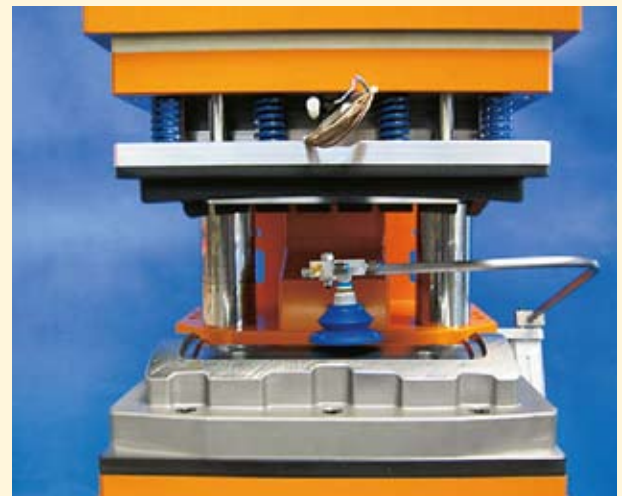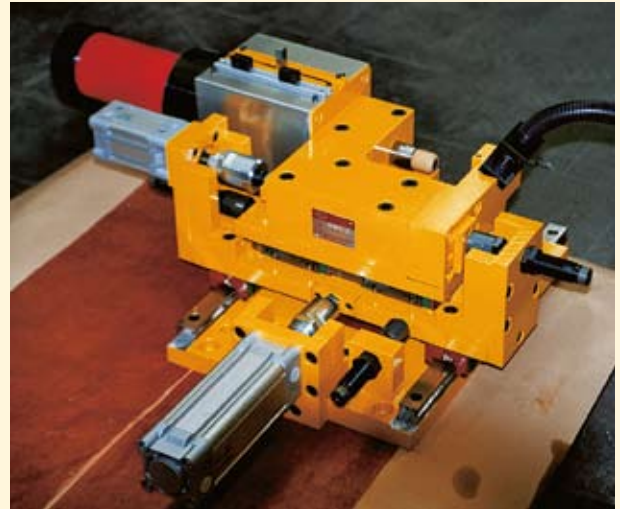

Industrial sector:

automotive industry

Project: 040217

Material: PPEPDM

Function: Special hydraulic unit for cutting the trailer coupling recess in the rear bumper of a VW Passat B6.



SIEMENS

SIMATIC PANEL

IPS
technika narzędziowa
German

F1	F2	F3	F4	HELP
K1	K2	K3	K4	
7	8	9	▲	HELP
4	5	6	◀ ▶	ESC
1	2	3	▼	ACK
HOME	END	0	SHIFT	INS DEL
			TAB	ENTER

AUTO

HAND

Störung
Reset

AUTO
Start


AUTO
HAND

NOT-AUS
EMERGENCY STOP















Punching and Cutting Units //

Punching and Cutting Units //

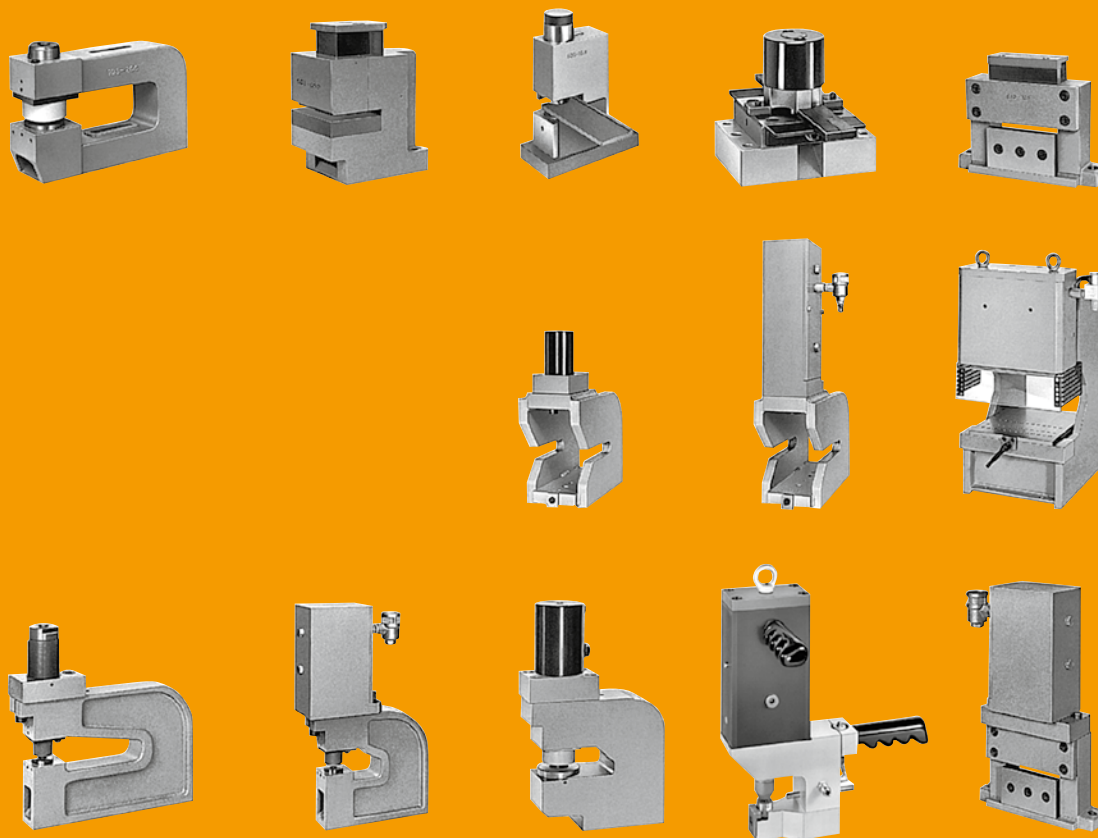

INTELLIGENT PUNCHING SOLUTIONS



Press-operated punching units for punching round and shaped cuts

Series	Illustration / Order Number	Punch diameter range	Throat depth range	Standard shapes	Material thickness
100	 100-160	2-7	160		0,3-5
101	 101-200 F	2-13	200		0,3-5
102	 102-200 F	8-25	200		0,3-5
103	 103-200 F	25-40	200		0,3-5
104	 104-200 F	40-63	200		0,3-5
105	 105-300 F	63-100	300		0,75-5
111	 111-125F	2-13	125		0,3-5
112	 112-200 F	8-22	200		2-10
113	 113-200 F	22-38	200		2-10
114	 114-200 F	35-63	200		2-10



90° notch units, press-operated

Series	Illustration / Order Number	Notch size	Notch shape	Material thickness
600	 600-063 L/R	63x63		0.3-8
	600-125 L/R	125x125		0.3-8



Rectangle notch units, press-operated

Series	Illustration / Order Number	Notch size	Notch shape	Material thickness
601	 601-050	50x50	e.g. 	0.3-3
	601-100	100x75		

Radius cut units, press-operated

Series	Illustration / Order Number	Radius range	Cutting angle α	Cutting shape	Material thickness
605	 605-16 L/R	3-16	max. 180°	e.g. 	max. 6
	605-20 L/R	3-20			



Radius cut units, press-operated

Series	Illustration / Order Number	Radius range	Cutting angle α	Cutting shape	Material thickness
606	 606-30	5, 10, 15, 20, 25, 30	90°		max. 5



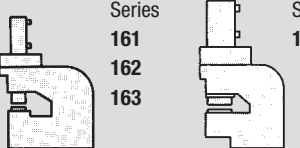
Cut-off units, press-operated

Series	Illustration / Order Number	Cutting width	Cut-off	Material thickness
610	 610-125 N	12		0.3-8
	610-250 N	250		



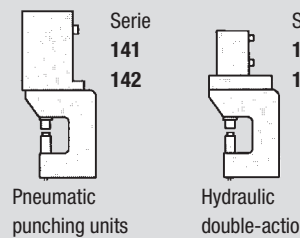
Pneumatic and hydraulic table presses

Series	Illustration	For use with units from series	Cylinder force [kN]
624 626	Series 624  Pneumatic single-action table presses	100, 101, 102 103, 104, 105 600-063L/R 600-125 601-050 606-30	40 68 80 109 120 125
	Series 626  Hydraulic double-action table presses		



Pneumatic and hydraulic punching units

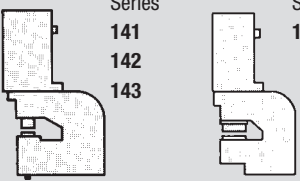Series	Illustration	Punch diameter range	Throat depth range	Shapes	Material thickness	Cylinder force [kN]
141 142 143 144	 <p>Series 141 142 143</p> <p>Series 144</p> <p>Pneumatic punching units</p>	2-13 8-25 25-40 40-63	100 200		max. 5	20 40 80
161 162 163 164	 <p>Series 161 162 163</p> <p>Series 164</p> <p>Hydraulic double-action punching units</p>	2-13 8-25 25-40 40-63	100 200			max. 5



Pneumatic and hydraulic profile punching units

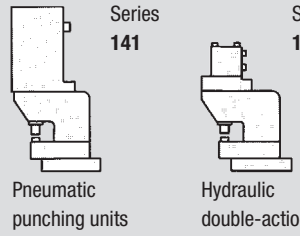Series	Illustration	Punch diameter range	Throat depth range	Shapes	Material thickness	Cylinder force [kN]
141 161	 <p>Series 141</p> <p>Series 161</p> <p>Pneumatic punching units</p> <p>Hydraulic double-action punching units</p>	2-13	50		0.3-3 max. 5	12 20 33 40 68 80 109
141 142 161 162	 <p>Series 141 142</p> <p>Series 161 162</p> <p>Pneumatic punching units</p> <p>Hydraulic double-action punching units</p>	2-13 8-25	63			0.3-3 max. 5




Pneumatic and hydraulic 90° notch units

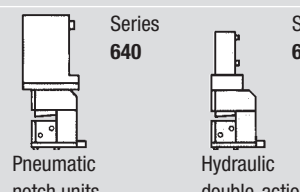Series	Illustration	Notch size	Notch shape	Material thickness	Cylinder force [kN]
640 660	 <p>Series 640</p> <p>Series 660</p> <p>Pneumatic notch units</p> <p>Hydraulic double-action notch units</p>	63x63	e.g. 	max. 5	68 71 80 109


Pneumatic and hydraulic rectangle notch units

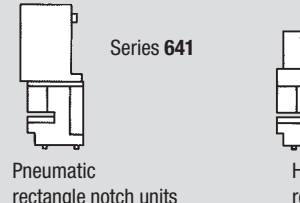Series	Illustration	Notch size	Notch shape	Material thickness	Cylinder force [kN]
641 661	 <p>Series 641</p> <p>Series 661</p> <p>Pneumatic rectangle notch units</p> <p>Hydraulic rectangle notch units, double-action</p>	50x50 100x75	e.g. 	0.3-3	40 68 80



Pneumatic and hydraulic radius cut units

Series	Illustration	Radius range	Cutting α	Cutting shape	Material thickness	Cylinder force [kN]
646 666	 <p>Series 646 Pneumatic radius cut units</p>  <p>Series 666-30-063 Hydraulic radius cut units, double-action</p>	5 10 15 20 25 30	90°		max. 5	40 63 80


Pneumatic and hydraulic cut-off units

Series	Illustration	Cutting width	Cut-off	Material thickness	Cylinder force [kN]
649	 <p>Serie 649 Pneumatic cut-off unit</p>	125		max. 5	40

Mobile pneumatic units for punching and notching

Series	Illustration	Punch diameter / radius range	Cutting α	Side length	Notch shape	Material thickness	Cylinder force [kN]
1421	 <p>1421-0512L 1421-0512R 1421-0512K</p>	\emptyset 2-13 R 3-R 18 —	— 90° max. 90°	— — max. 20x20		max. 3	12

Pipe punching units, press-operated, with pneumatic or hydraulic drive unit

Series	Illustration	Punch diameter range	External pipe diameter	Pipe thickness	Cylinder force [kN]
101-RLA 141-RLA 161-RLA		2-13	40-60	1-5 1-3 1-5	— 80 68

The problems encountered during non-cutting production are often similar to those which arise in metal-cutting production. For example, small series, repetitive parts or large series, which frequently take turns.

Due to the high tool costs and set-up time, the suitability of conventional punching and cutting tools for these tasks is limited. As a result, procedures like drilling, milling, sawing and heat erosion are often resorted to, although the use of modern tool units would be much more suitable for the number of pieces required.

Low costs

Savings, as well as a reduction of the production costs, because expensive drilling and sawing work is no longer necessary.

High profitability

The tool units can be reused as often as you like.

Short set-up times

Simple set-up and conversion to the desired punch layout.

Uniform construction height


The total height and the material support height of the units are the same, therefore, all tool units can be combined.

Stable construction

High-quality steel and spheroidal graphite cast iron prevent a risk of breakage and guarantee a long life.


Punching units

Installation and machining options

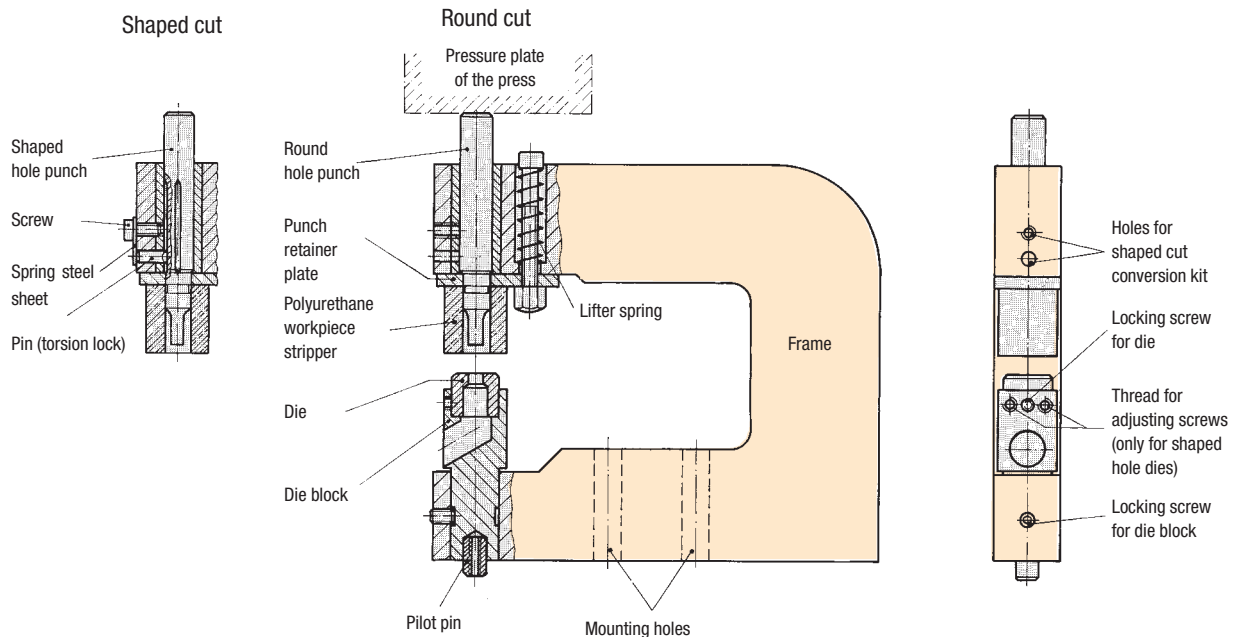


Machining options


Round cut

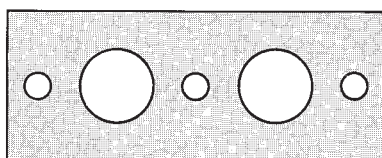

Shaped cut

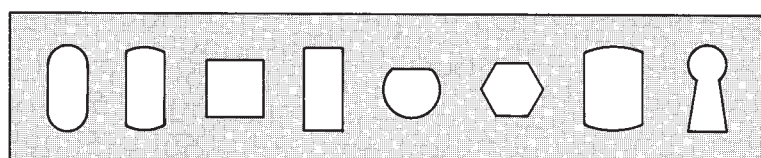

Operation sequence during punching

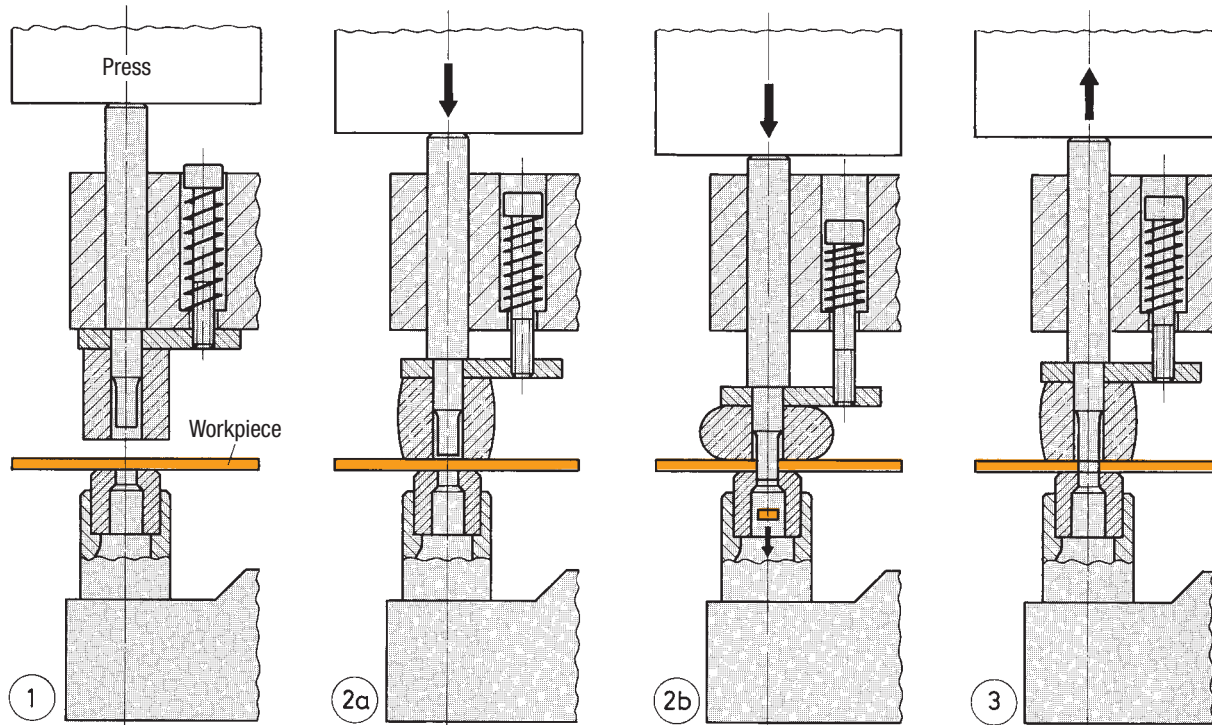

1 Punching unit inoperative

The punch is held in its upper position by the punch lifter spring, as well as the punch retainer plate which is connected to it.

The workpiece is inserted.

2 Punching unit in operation

2a The press ram moves the punch and the punch retainer plate downwards. The polyurethane workpiece stripper presses the workpiece against the die.

2b The next press stroke carries out the punching procedure and ejection of the scissels. The punch should enter the die to a depth of approximately 1 mm.

The following step is the return stroke of the press ram.

3 Return stroke

The polyurethane workpiece stripper, which has been greatly deformed during the punching process, now fulfils its primary function, i.e. as a result of its pretension the punch is extracted from the workpiece.


The remaining pretension of the polyurethane stripper and the punch lifter spring act at the same time as the press return stroke to pull the punch back into its initial position.

Punching units of series 100,101,102,103,104 and 111

The operation sequence during punching described above applies generally to these punching units. Series 111 is the only one in which the arrangement of the die block is different which allows so-called block dies – dies without die blocks –, to be used for the punching of L-, U- or Z -profiles.

Punching units of series 105,112,113 and 114

The dies of these units are arranged similarly to those in series 100 to 111. For the series 105 to 114 the polyurethane workpiece stripper is situated above or built into the frame. Via the pressure plate the press ram moves the punch, the polyurethane compression spring and the spring-loaded guide bush downwards. The guide bush presses the workpiece against the die and supports the removal of the workpiece during the return stroke. The remainder of the punching process takes place as described in »Operation sequence during punching«.



(A)
90° notch unit with
gauging table



(B)
Rectangle
notch unit



(C)
Radius cut unit



(D)
Cut-off unit

90° notch units, rectangle notch units, radius cut units, cut-off units

The sturdy, unbreakable main constructions of these units are equipped with punch and die blades of highly alloyed chrome steel. The punch blades are held by springs in their upper position, respectively pulled back to this position after the cutting process.

For 90° notch units and cut-off units the cutting edges of the punch blades are diagonal to the cutting edges of the die blades. This effectively reduces the cutting length and the cutting force required.

The die clearance is preset at the factory to 0.1 mm for material with a thickness ranging from 0.3 up to 3 mm. Metal compensation sheets for increasing the die clearance are included in the delivery.

The punch blades are resharpened on their lower edge and the die blades are resharpened at the edge facing the unit, i.e. the rear surface of the blade. By turning the die blade 180° another cutting edge is available for further work.



By adjusting the press stroke the difference resulting from the resharpening of the punch blade is compensated for.

In contrast to the 90° notch units and cut-off units, the cutting tools for the rectangle notch units and the radius cut units are specially made to customer specifications for the respective material thickness and the desired shape.

Examples of possible notch and cut shapes are shown in the illustrations below.

With some of the 90° notch units, it is possible to cut notches for L-profiles as far as the inside edge of the profile.


Machining options using the tool units illustrated above

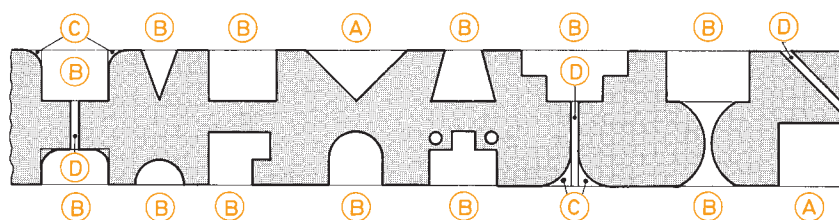

Assembly and adjustment of the tool units

Assembly of the punching units


All punching units are equipped with a pilot pin in the bottom, aligned with the punch and die for positioning in mounting holes or the guide grooves of positioning plates or press tables. The punching units are fixed either by screws in the mounting holes provided or by means of clamping arms and similar clamping elements. See Fig. 1.

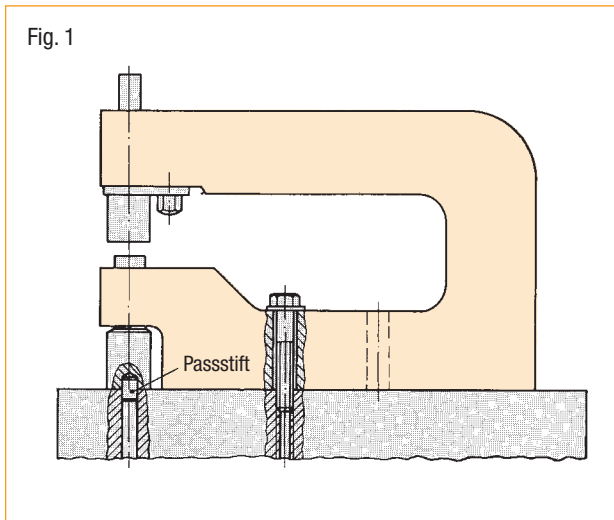

Assembly of the 90° notch units, rectangle notch units, radius cut units and cut-off units

These units have one or two pilot pins in the bottom side for positioning. The units are fixed by clamping arms or for some units by screws in the mounting holes provided (Fig. 2).

The positioning and mounting methods described here also apply to the pneumatic and hydraulic units.

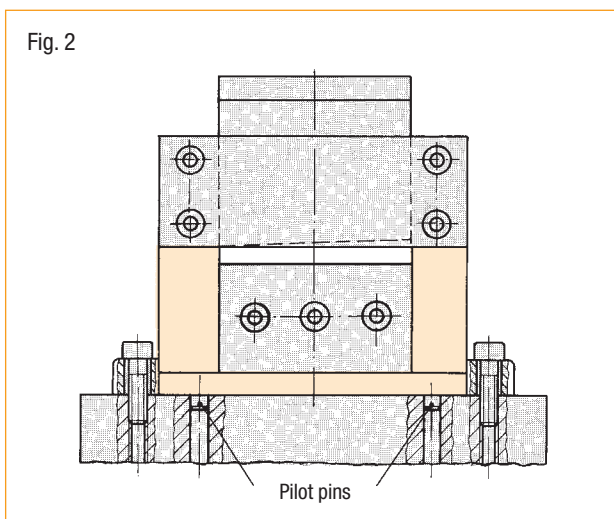

Tool setting of punching units with templates

When several punching units are used together a template can be used to adjust the distance between the units.


The holes in the template correspond to the outside diameter of the die of the respective punching unit. The thickness of the template should be approximately 6 mm.

The exact distance between holes is obtained by placing the template over the dies.

The punching units are fixed with screws, clamping arms and similar clamping elements.


The workpiece is adjusted for processing by means of pins or limit stops in or on the template. See Fig. 3 (below) and Fig. 4 (next page).

Fig. 3: Tool setting of 2 punching units

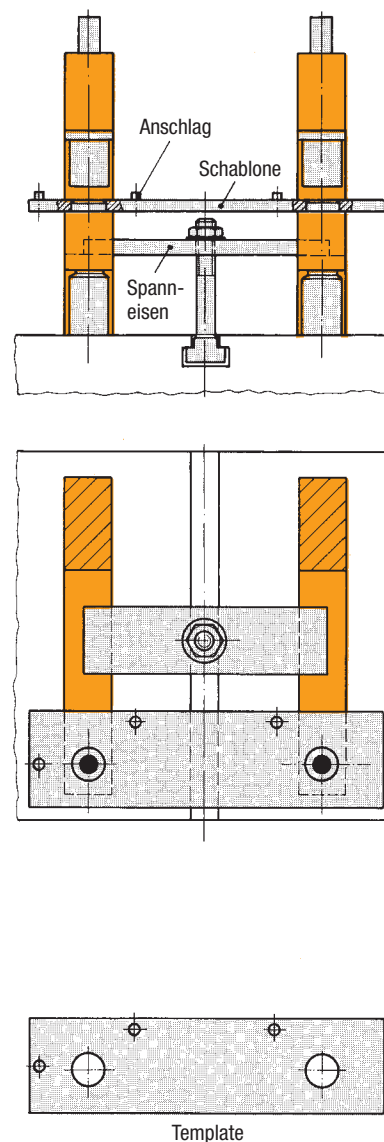

Tool setting of punching units with templates (continuation)

Fig. 4: Tool setting of 6 punching units together with one 90° notch unit

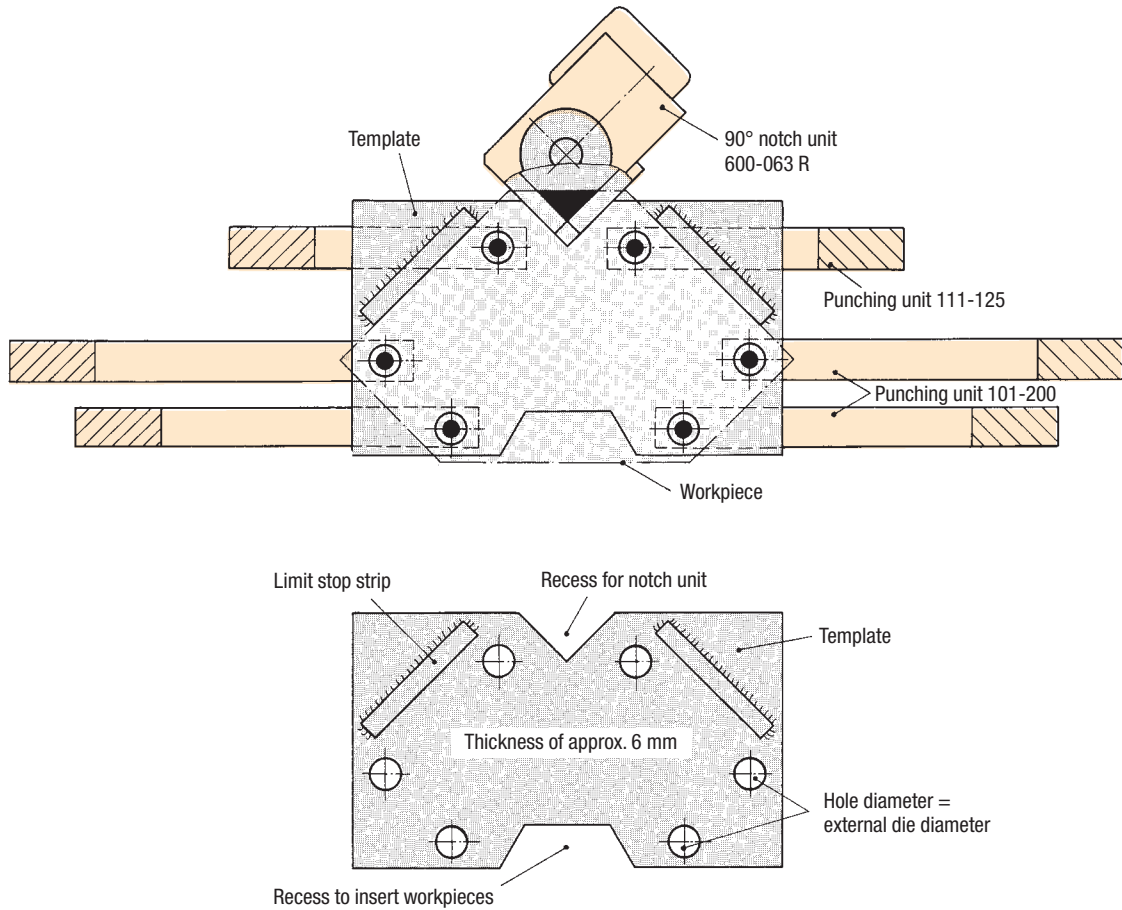

Punching units positioned with a template



Punching units arranged with a positioning plate

Setting up of tool units with positioning plates

Positioning plates are suitable for the processing of different punch layouts and workpieces.

They enable the combination of punching, notch and cutting units with the required distance between them, see Fig. 5.

The positioning plate is equipped with holes $\varnothing 10^{H7}$ which correspond to the desired punch layout. The tool units are positioned exactly in these holes by means of the pilot pins in the bottom.




The tool units are fastened in a similar way to that illustrated in figures 1 and 2.

The workpiece limit stops and supports are mounted on the positioning plates in the desired position in the same manner, i.e. by means of positioning holes and mounting holes.

Fig. 5: Design of a combined positioning plate for the processing of 2 different workpieces

Application example I




for one punching unit and two 90° notch units

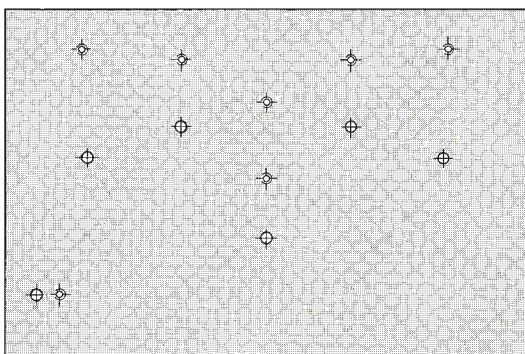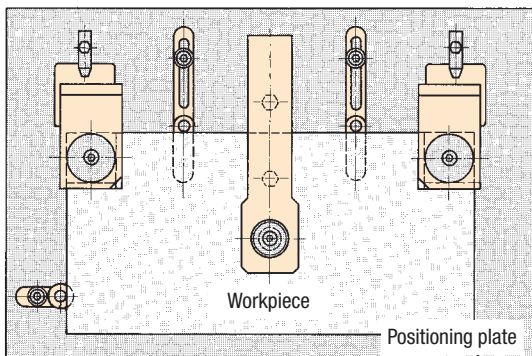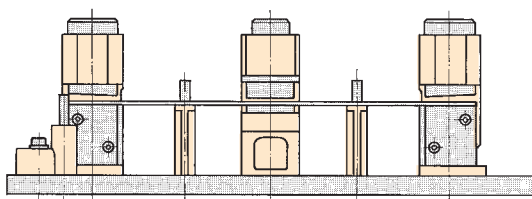


Positioning plate with positioning and mounting holes for application example I

Application example II

for two punching units and one rectangle notch unit

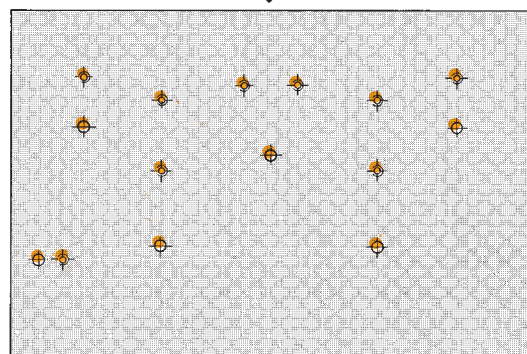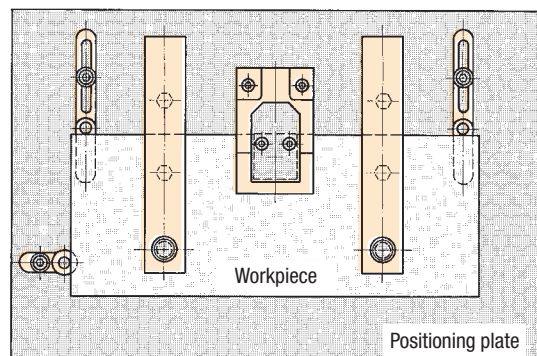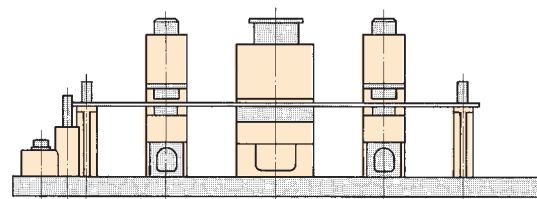

Positioning plate with positioning and mounting holes for application example II

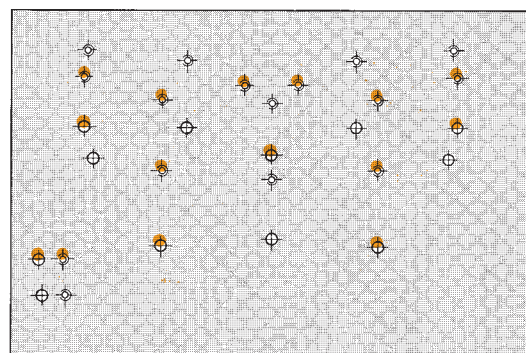


Combined positioning plate with positioning and mounting holes for application examples I and II

Automation

For large numbers of workpieces, there is frequently a requirement for automation technology, especially if workpieces are not inserted individually but introduced in the form of rods or strips. In this case it is advisable to combine punching and notch units with cut-off units (see Fig. 6).

The material can be fed in manually against a fixed limit stop or by means of an automatic advancing device. The precision of this device is decisive for the precision of the workpiece. In both cases, flawless guidance of the material has to be guaranteed.

Punched holes which are very close together can be produced by positioning the punching units with an offset of one working step. Every press stroke yields a finished workpiece.

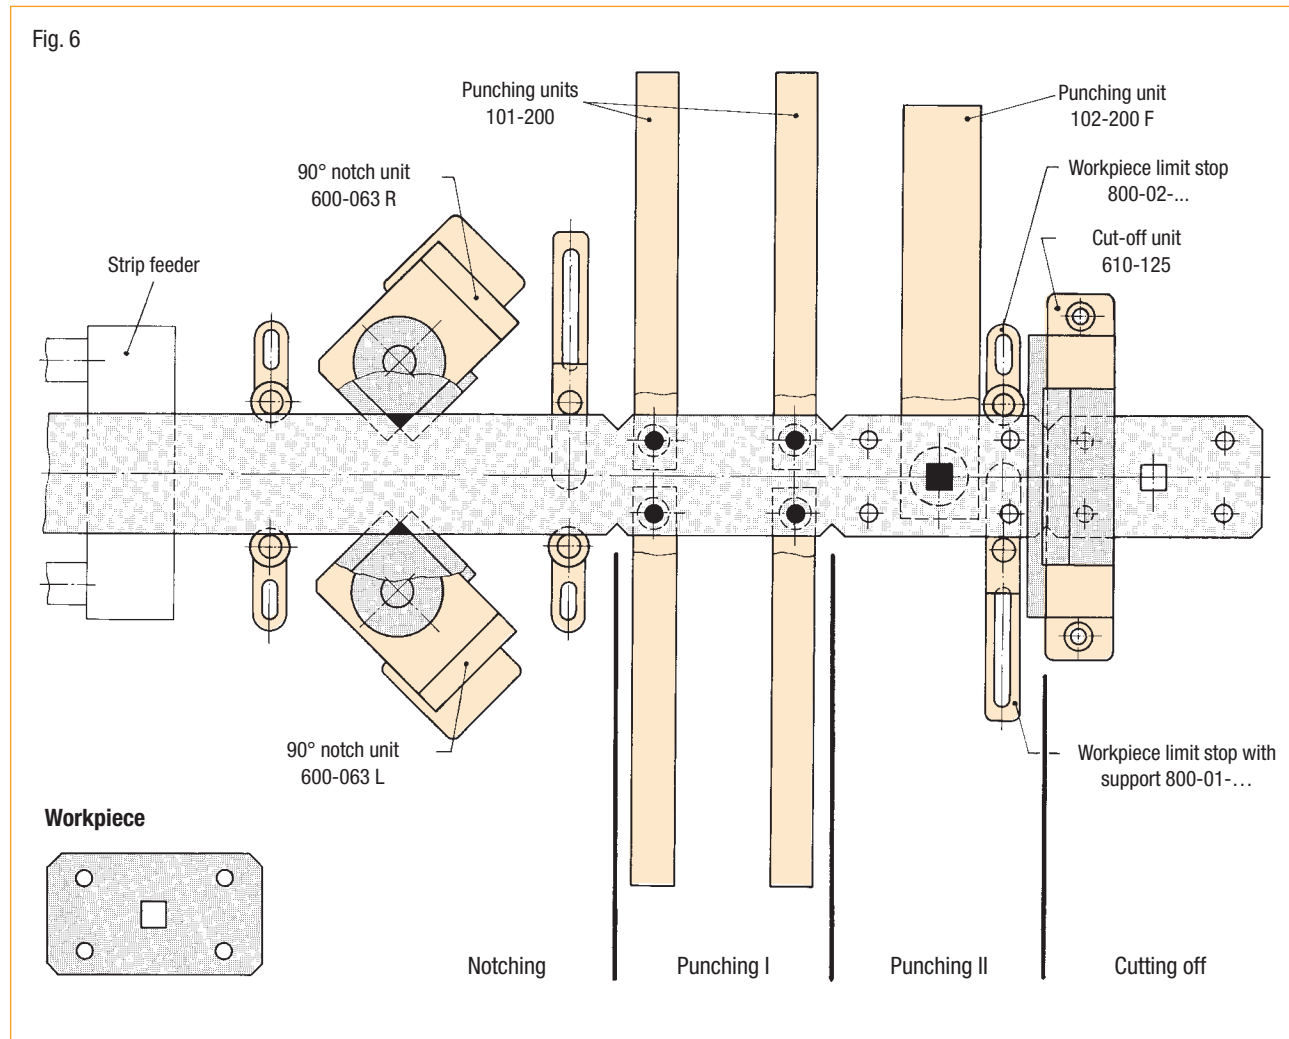

Please note

All tool units, except press-independent units, have an universal installation height of 190 mm in a closed position. This means that the lower edge of the punch and the upper edge of the die are at the same level.


For notch and cut-off units the closed position of 190 mm is reached, when the upper blade is inserted to its full length.

The lower position of the press ram is adjusted in such a way that the distance between the upper edge of the press table and the lower edge of the press ram amounts to 189 ± 1 mm.


The tool units will be damaged if the setting is less than 185 mm.

Note

The forces in this catalogue are indicated in kN (kilo Newton).
1 kN = 1,000 N

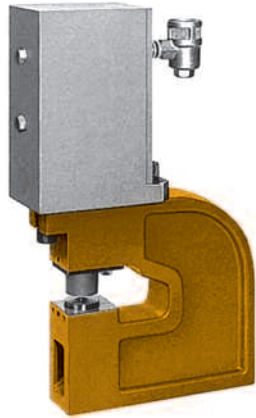

Punching unit, pneumatically operated

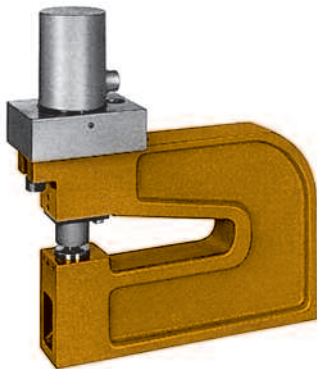

Punching unit, hydraulically operated



90° notch unit, hydraulically operated



Cut-off unit, pneumatically operated

Pneumatic and hydraulic tool units

In addition to the press-operated tool units, a large number of punching units, notch units and cut-off units equipped with their own drive are offered in this catalogue. These units do not require a press. They are equipped either with powerful, patented pneumatic power cylinders or with double-action hydraulic cylinders.

Pneumatic or hydraulic tool units can be used wherever there is no suitable press available or the appropriate press is being used for other parts.

The tool units are suitable for the treatment of big, bulky and moulded workpieces which are processed outside the press area, i.e. the units can be used at any location.

The only prerequisite is the availability of air or oil pressure.


The restrictions on pneumatic or hydraulic tool units are the load capacity and the cutting force required. Prior to using these units it is, therefore, necessary to determine the cutting force. The cutting force charts provide a quick overview.

As illustrated on the left, the most important difference to the press-operated tool units is the top mounted drive cylinder.

The cutting process for punching, notching and cutting is the same as that which has been described for the press-independent tool units.

In contrast to tool units which operate independently from presses, the tool frame has to withstand the effective cutting force during processing. Solid construction of the tool frames is, therefore, a prerequisite.

For this reason the height of the material support for these tool units is 125 mm.

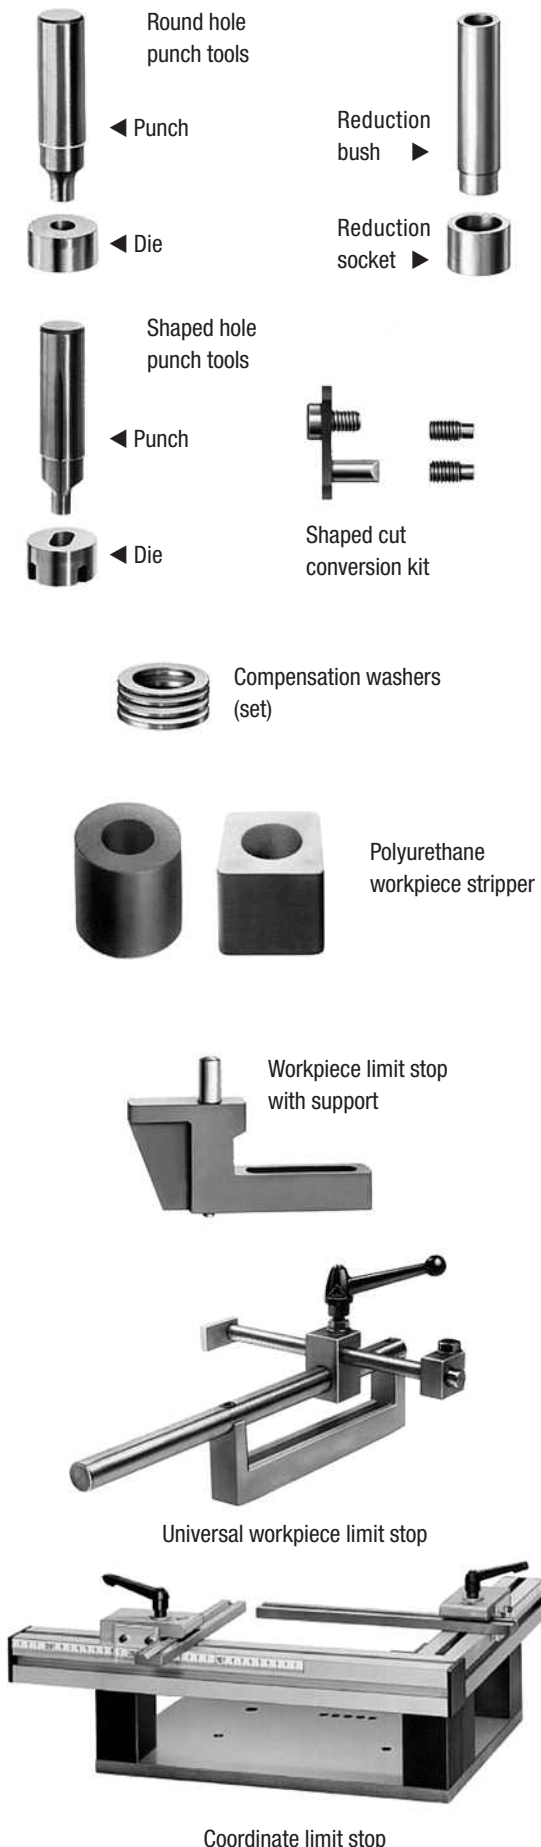

Punching tools and accessories

Round hole punch tools

When punching, the diameter of the punch tool corresponds to the nominal diameter of the hole. When ordering a complete punch tool kit, (punch and die), or a single die, the die is produced with the die clearance required taking the max. material thickness and material strength into account. The die clearance is the difference between the die diameter and the punch diameter. The thickness of the material to be punched should not exceed 0.8 times that of the punch diameter, as this would result in premature wear and tear to the tool.

For a number of punching units for round cuts smaller hole diameters than those indicated in the overviews and tables can be produced by using **reduction bushes** and **reduction sockets**. The appropriate polyurethane workpiece stripper is included.

Shaped hole punch tools

The special design of shaped hole punch tools enables them to be installed in the shaped cut punching units simply and quickly. The punch and die can be used »lengthways« and »crosswise«.

Two adjusting screws on the lower part of the frame allow the die to be positioned in line with the punch and secured against twisting.

Shaped cut conversion kit

If required at a later date, punching units for round cuts can be converted quickly and easily for the use of shaped cuts by means of conversion kits.

Compensation washers

Compensation washers are required after sharpening to adjust the die to the height of the material support.

Polyurethane workpiece stripper

The punched workpiece has a tendency to cling to the punch. With the aid of the workpiece stripper which must have a stripping force of approximately 15 (of the cutting force, the workpiece is removed from the punch.

Polyurethane workpiece strippers are highly resistant to wear and are insensitive to oil and grease.

For especially high stripping forces needed for thick workpieces, reinforced workpiece strippers are available for some punching units.

Workpiece limit stop with support


Workpiece supports and limit stops are important accessories for the feeding of the workpiece or strip material.

Universal workpiece limit stop

This versatile device forms the ideal connection between the workpiece support and limit stop. Examples of a wide variety of uses are illustrated.


Coordinate limit stop

Coordinate limit stops enable the distance between holes to be quickly and easily set. Time consuming set-up work with limit stops is unnecessary.

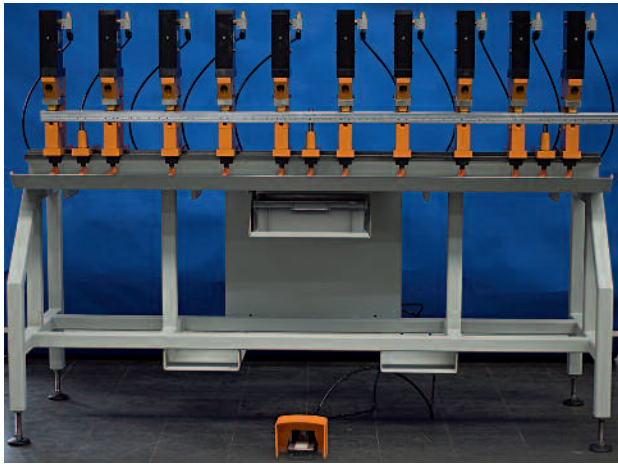

Application examples


The illustrated examples are typical applications for the tool units presented in this catalogue for units with press-dependent and press-independent operation.

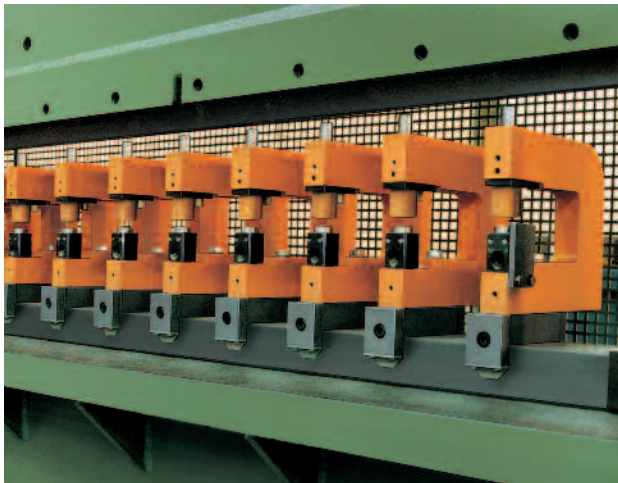


Tool units for punching in a bending press



Tool units for punching in an eccentric press

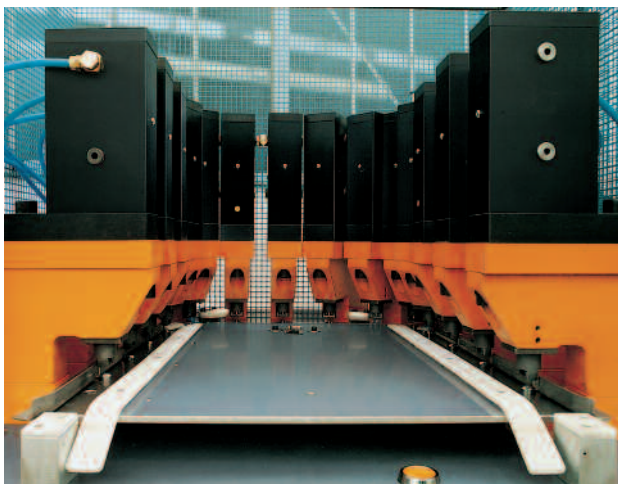

Pneumatic single-action punching units for punching shaped cuts

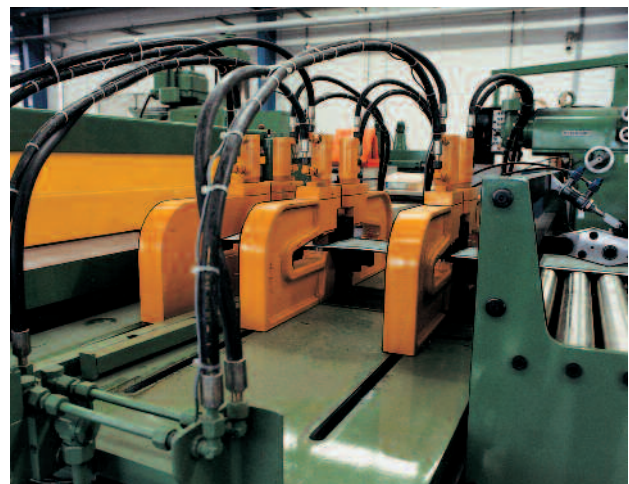


Hydraulic double-action punching units mounted on movable elements for punching steel from coil strips in different widths.

Punching unit, hole \varnothing 2–7 mm



Only round cut
Hole diameter with material thickness 3 2–7 mm¹⁾
Hole diameter with material thickness 5, max. 5 mm
Material thickness for steel St 60 0.3–5 mm
¹⁾ Hole \varnothing 6 to 7 mm only in material thickness up to 3 mm.

Punching tools (punch and die) have to be ordered separately.
 See table below.
Accessories See pages accessories.

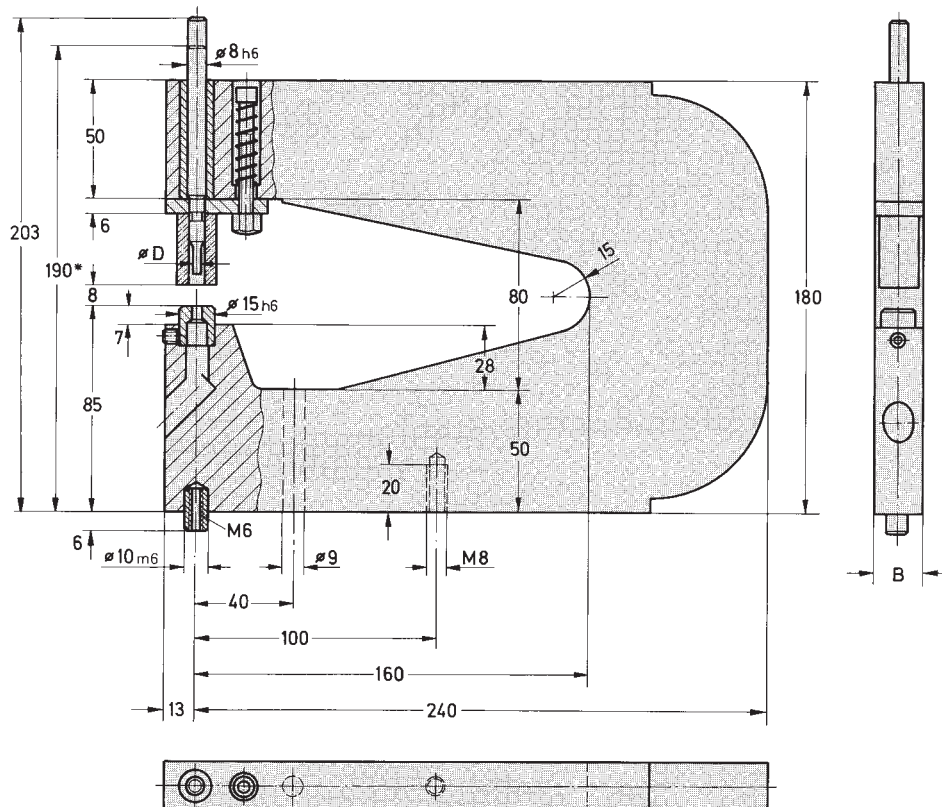

* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately		
Order No.	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Punch kit Order No.	Round punch Order No.	Die Order No.
100-160	160	2–7	20	5.2	500- \varnothing -BL-ST	300- \varnothing	400- \varnothing -BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

Punching unit, hole \varnothing 2–13 mm



Round and shaped cuts 

Hole diameter with material thickness 3 2–13 mm¹⁾

Hole diameter with material thickness 5, max. 11 mm


Material thickness for steel St 60 0.3–5 mm

¹⁾ Hole \varnothing 12 to 13 mm only in material thickness up to 3 mm.



It is possible to punch holes with \varnothing 2–7 mm by using reduction bushes and reduction sockets, which enable the use of the punch and die from the next smaller size of punching units.

Punching tools (punch and die) have to be ordered separately.
See table below.

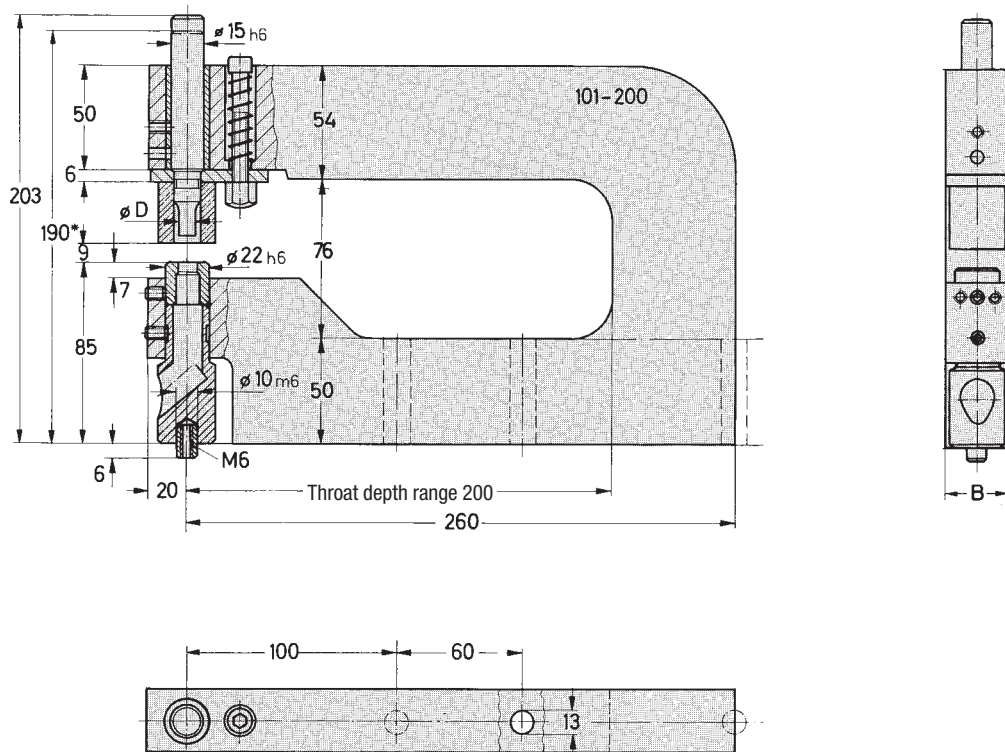Accessories See pages accessories.




* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Round punch 		Shaped punch 	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
101-200 F	200	2–13	30	7.8	501- \varnothing -BL-ST	301- \varnothing	401- \varnothing -BL-ST	501-Formloch-BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

Punching unit, hole \varnothing 8–25 mm

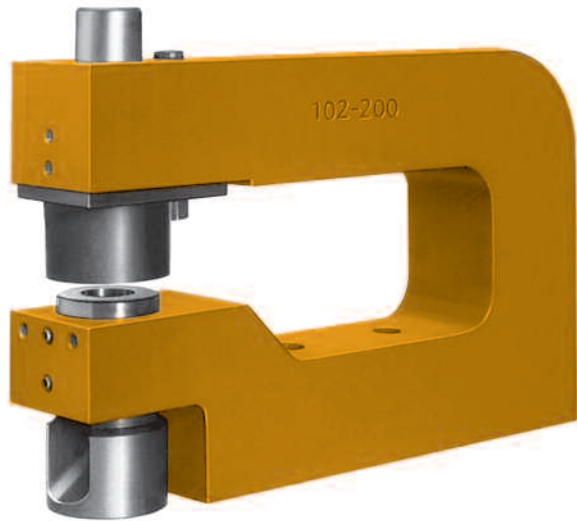

Round and shaped cuts 


Hole diameter **8–25 mm¹⁾**

Material thickness for steel St 60 **0.3–5 mm**



¹⁾ It is possible to punch holes with \varnothing 2–8 mm by ordering a reduction bush and reduction socket

Punching tools (punch and die) have to be ordered separately.
See table below.

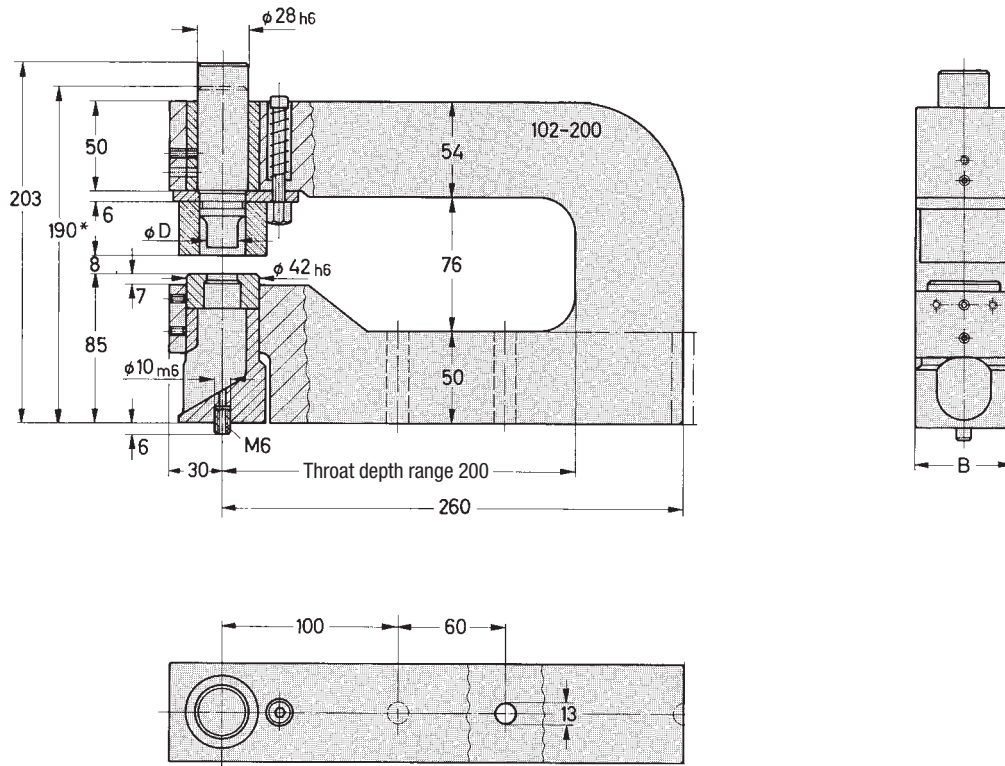Accessories See pages accessories.



* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Round punch 		Shaped punch 	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
102-200 F	200	8–25	55	15	502- \varnothing -BL-ST	302- \varnothing	402- \varnothing -BL-ST	502-Formloch-BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**



Round and shaped cuts


Hole diameter **25–40 mm¹⁾**

Material thickness for steel St 60 **0.3–5 mm**

¹⁾ Punching tools for holes with Ø 20–25 mm are available on request in special sizes

Punching tools (punch and die) have to be ordered separately. See table below.

Accessories See pages accessories.

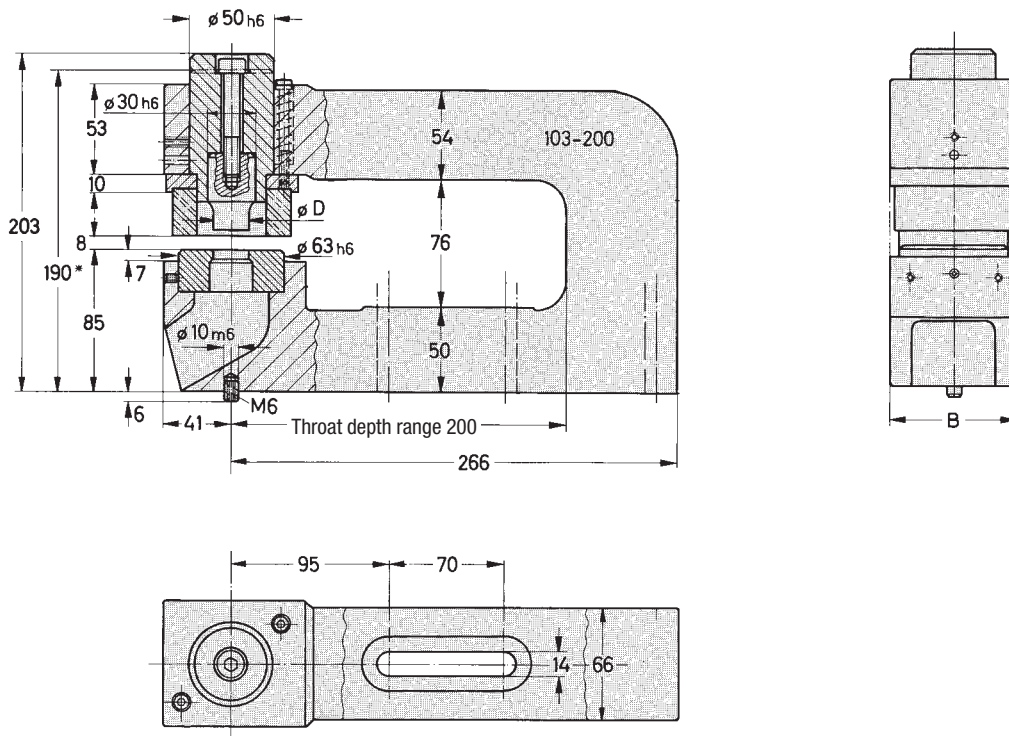

* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole Ø D	Width B	Weight ~ [kg]	Round punch		Shaped punch	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
103-200 F	200	25–40	75	14	503-Ø-BL-ST	303-Ø	403-Ø-BL-ST	503-Formloch-BL-ST


Insert in Order No.: Ø = hole Ø, BL = material thickness, ST = material and strength. See also **punching tools**

Punching unit, hole \varnothing 40–63 mm





Round and shaped cuts 
 Hole diameter **40–63 mm**
 Material thickness for steel St 60 **0.3–5 mm**

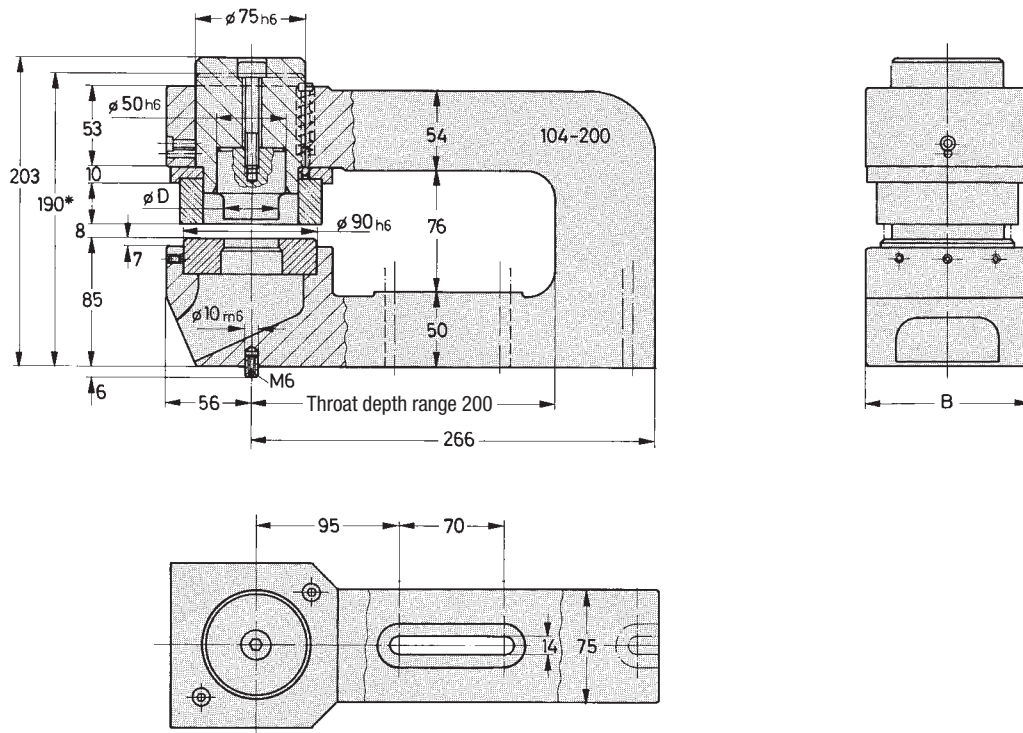Punching tools (punch and die) have to be ordered separately.
 See table below.
Accessories See pages accessories.




* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Round punch 		Shaped punch 	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
104-200 F	200	40–63	108	20	504- \varnothing -BL-ST	304- \varnothing	404- \varnothing -BL-ST	504-Formloch-BL-ST


Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

Punching unit, hole \varnothing 63–100 mm

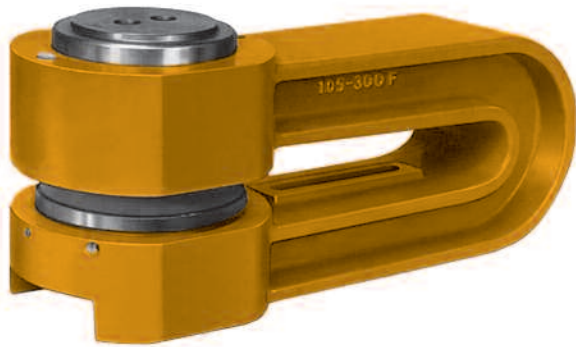

Round and shaped cuts
Hole diameter 63–100 mm
Material thickness for steel St 60 0.75–5 mm

Punching tools (punch and die) have to be ordered separately. See table below.
Accessories See pages accessories.

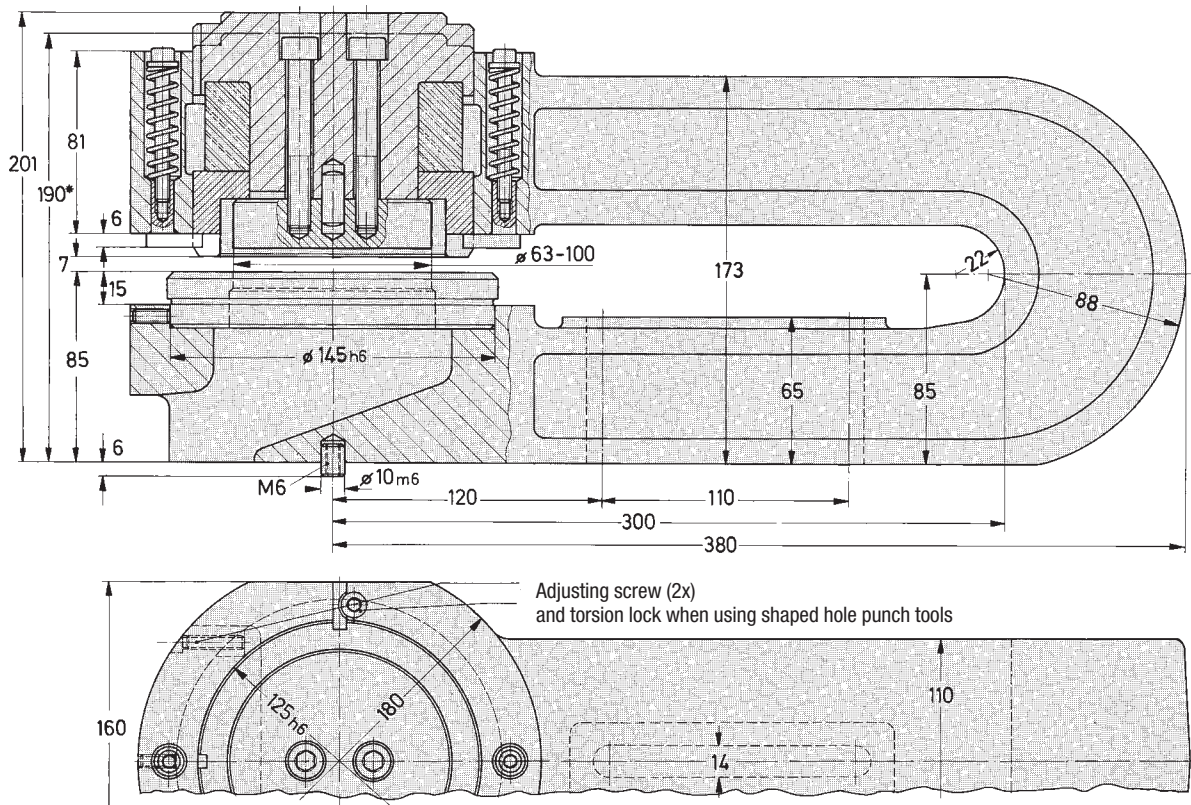


* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Round punch		Shaped punch	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
105-300 F	300	63–100	160	42	505- \varnothing -BL-ST	305- \varnothing	405- \varnothing -BL-ST	505-Formloch-BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

Punching unit, hole Ø 2–13 mm

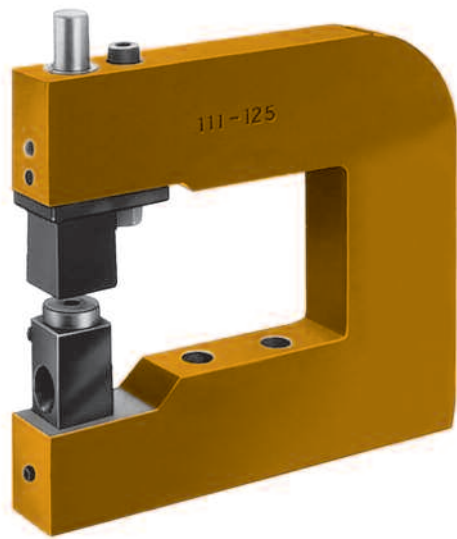


- Round and shaped cuts
- Hole diameter with material thickness 3 2–13 mm¹⁾
- Hole diameter with material thickness 5, max. 11 mm
- Material thickness for steel St 60 0.3–5 mm
- ¹⁾ Hole Ø 12 to 13 mm only in material thickness up to 3 mm.

Punching units of series 111 are particularly suitable for punching small profiles. For special applications, either a special die block with a small special die (see illustration) can be used or a one-piece block die (see illustration).

In both cases, the punching of very small profiled parts is possible after removing the standard die block.

Punching tools (punch and die) have to be ordered separately.
See table below.


Accessories See pages accessories.

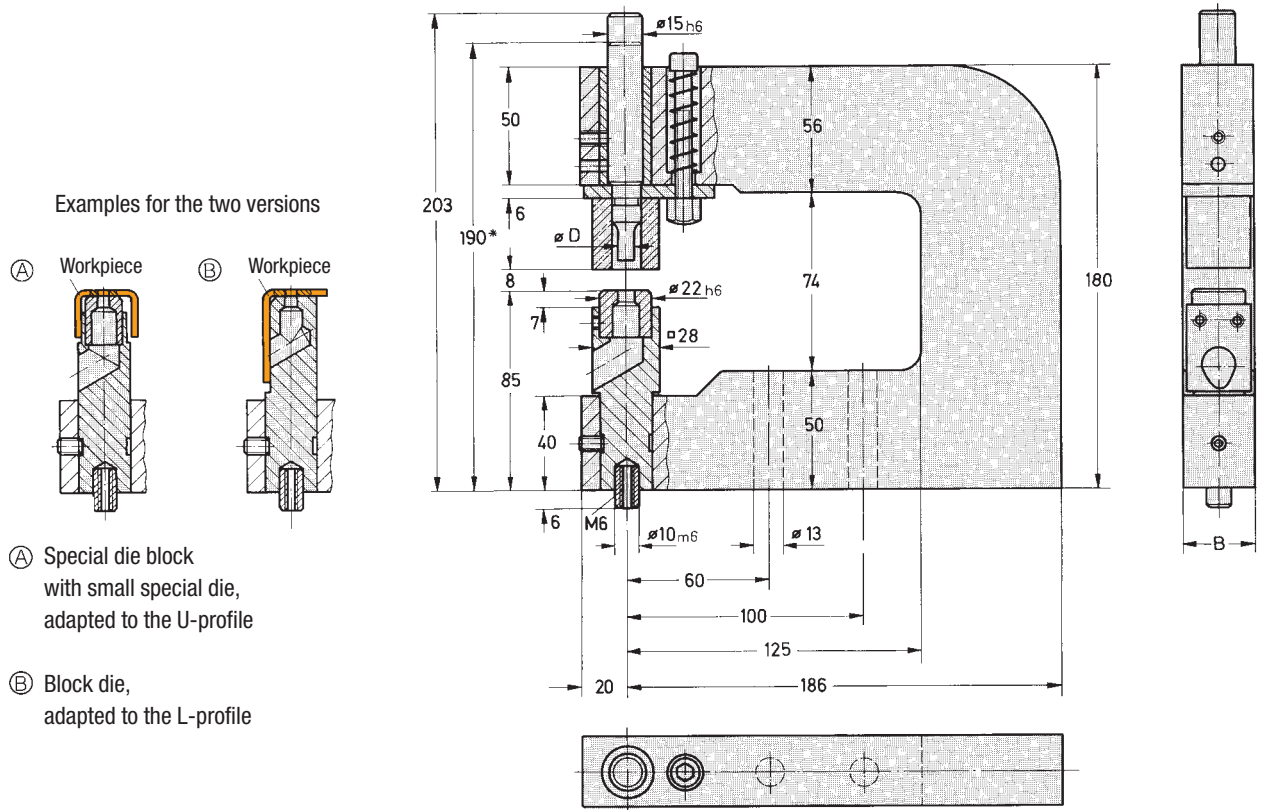

Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole Ø D	Width B	Weight ~ [kg]	Round punch		Shaped punch	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
111-125 F	125	2–13	30	6	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST

Insert in Order No.: Ø = hole Ø, BL = material thickness, ST = material and strength. See also **punching tools**

Punching unit, hole \varnothing 8–22 mm

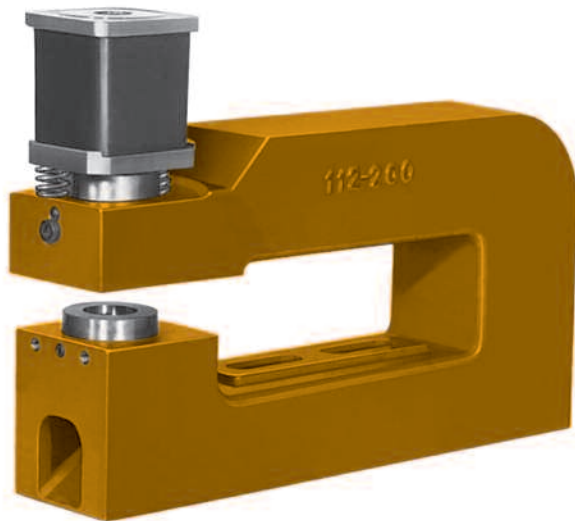

Round and shaped cuts

Hole diameter **8–22 mm**

Material thickness for steel St 60 **2–10 mm**


With small modifications these punching units are suitable for punching L-, U-, or Z-profiles, see application example.

Punching tools (punch and die) have to be ordered separately.


See table below.

Accessories See pages accessories.

Example

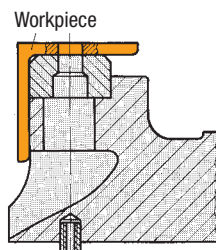


Punching unit adapted to the L-profile

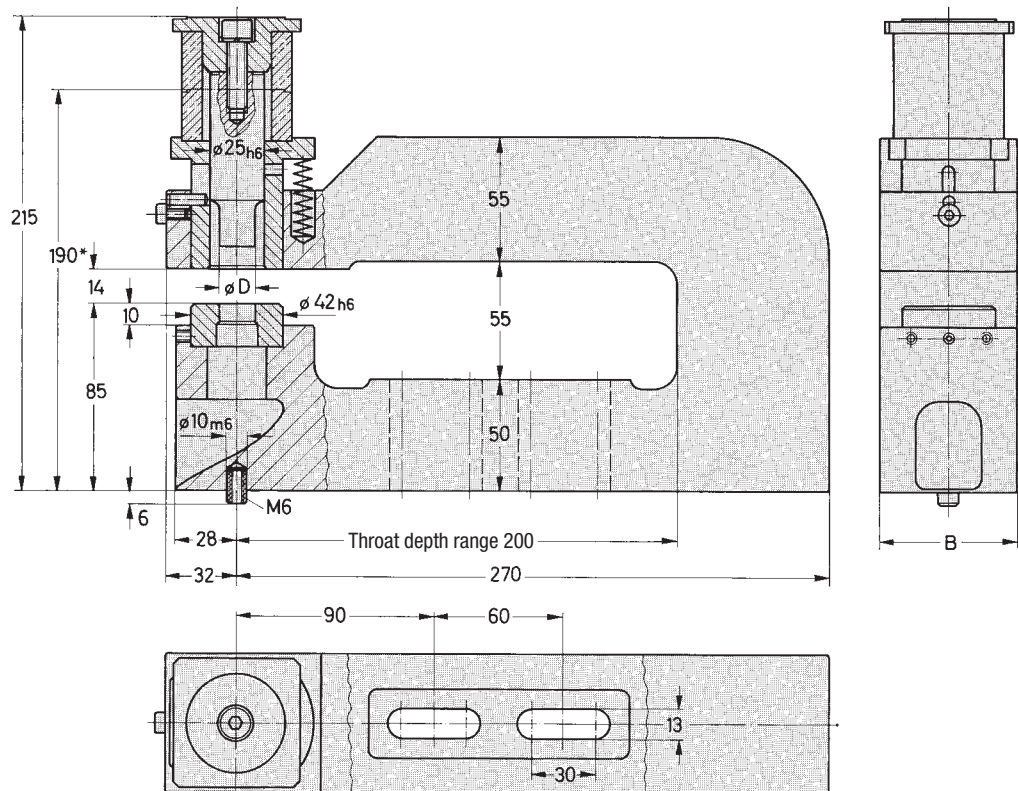

* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Round punch		Shaped punch	
Order No.					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
112-200 F	200	8–22	63	16	512- \varnothing -BL-ST	312- \varnothing	402- \varnothing -BL-ST	512-Formloch-BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

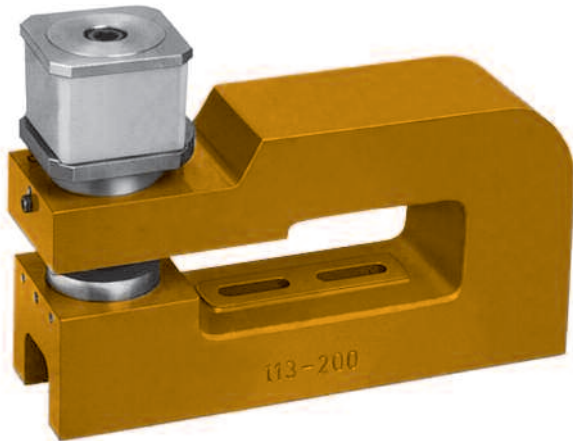

Round and shaped cuts 


Hole diameter **22–38 mm**

Material thickness for steel St 60 **2–10 mm**



With small modifications these punching units are suitable for punching L-, U-, or Z-profiles, see application example.

Punching tools (punch and die) have to be ordered separately.
See table below.

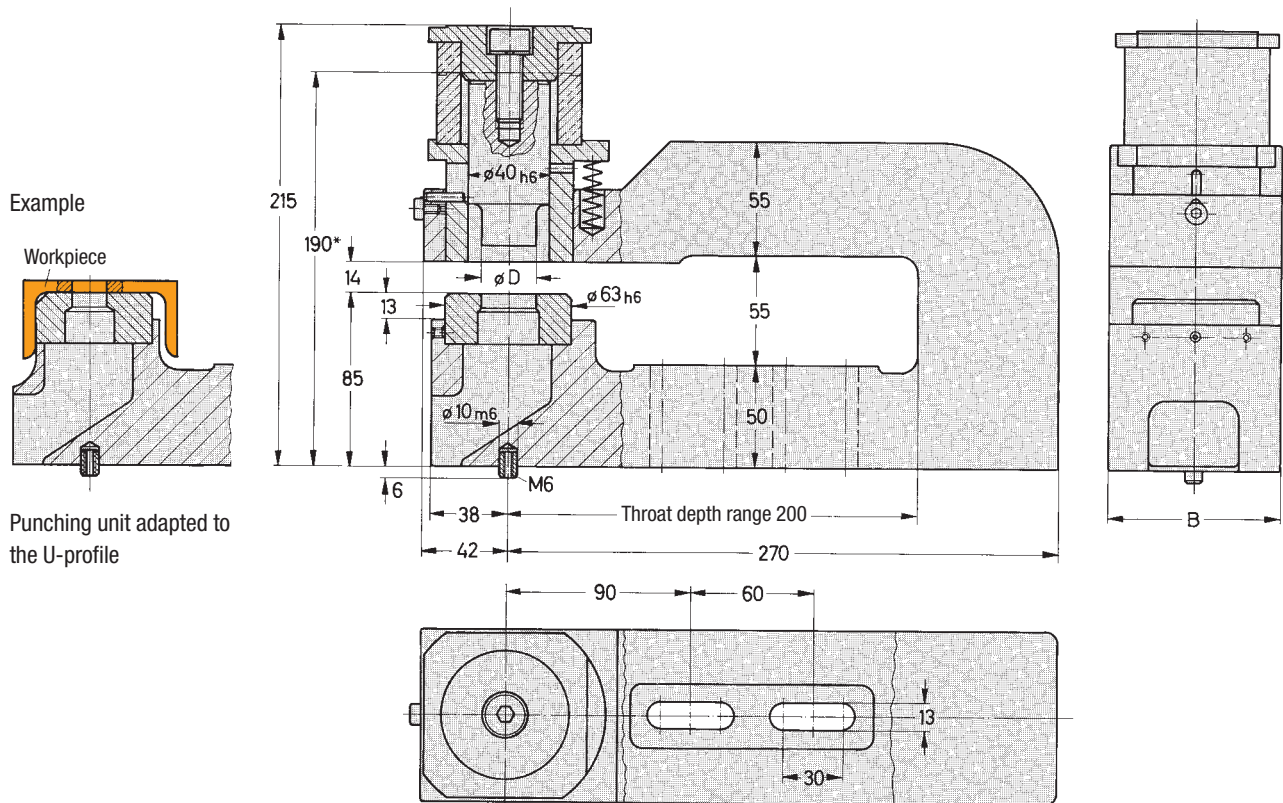
Accessories See pages accessories.



* Lower edge of punch and upper edge of die are flush


Punching unit without punching tools					Punching tools have to be ordered separately			
Order No.	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Round punch 		Shaped punch 	
					Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
113-200 F	200	22–38	85	21	513- \varnothing -BL-ST	313- \varnothing	403- \varnothing -BL-ST	513-Formloch-BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

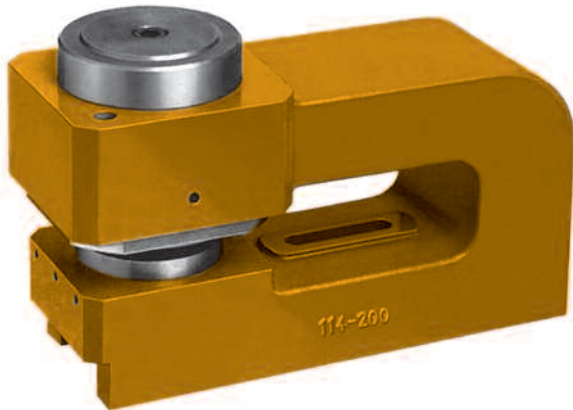

Round and shaped cuts
Hole diameter 35–63 mm
Material thickness for steel St 60 2–10 mm

Punching tools (punch and die) have to be ordered separately. See table below.
Accessories See pages accessories.

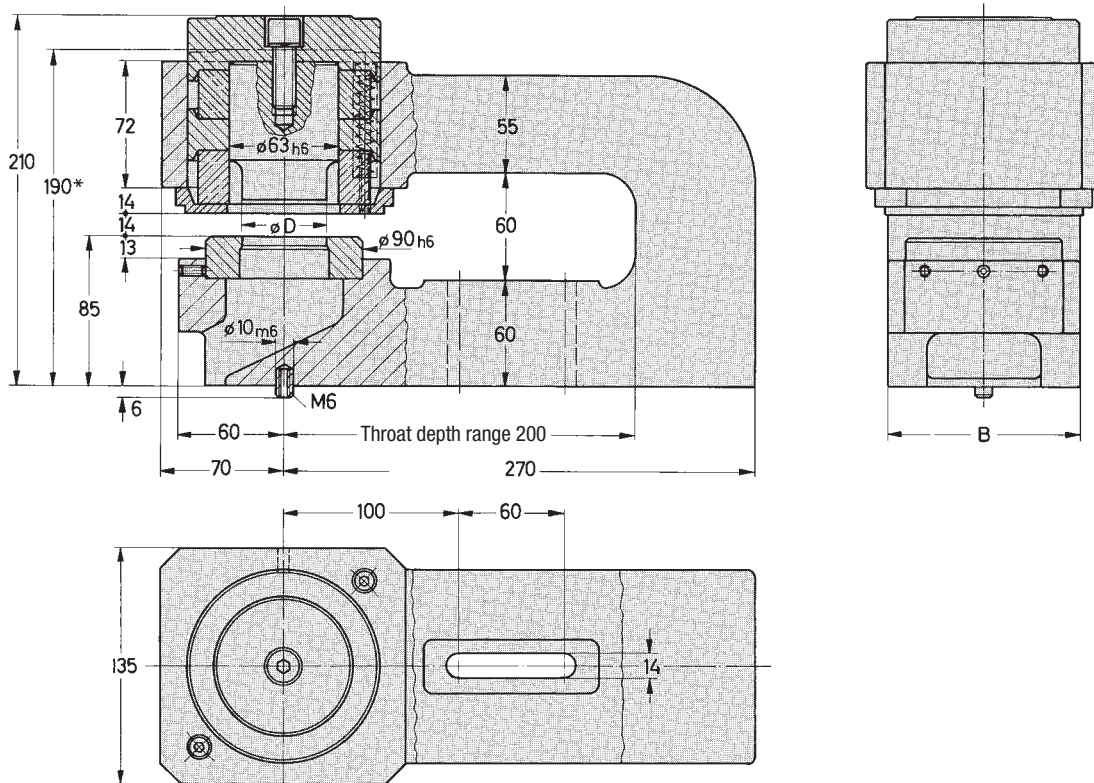


* Lower edge of punch and upper edge of die are flush

Punching unit without punching tools					Punching tools have to be ordered separately			
	Throat depth range	Hole \varnothing D	Width B	Weight ~ [kg]	Punch kit	Round punch	Die	Shaped punch
Order No.					Order No.	Order No.	Order No.	Order No.
114-200 F	200	35–63	112	34	514- \varnothing -BL-ST	314- \varnothing	404- \varnothing -BL-ST	514-Formloch-BL-ST

Insert in Order No.: \varnothing = hole \varnothing , BL = material thickness, ST = material and strength. See also **punching tools**

90° notch units, notch size 63x63 mm

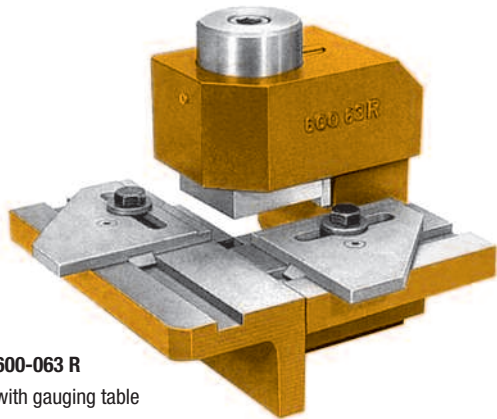

600-063 R
with gauging table
800-063S

Cutting angle 90°
Max. notch size 63x63 mm
Material thickness with steel St 60 0.3–8 mm

The **notch units**, adjusted to a die clearance of 0.1 mm, are pre-set in the factory for cutting material with a thickness of 0.3–3 mm. With the metal compensation sheets (0.2 mm) included in the delivery, the die clearance can be set to 0.2 or 0.3 mm for greater material thickness. With the adjustable **gauging table** the notch size can be adjusted continuously in two directions from 0–63 mm. The gauging table has to be ordered separately.




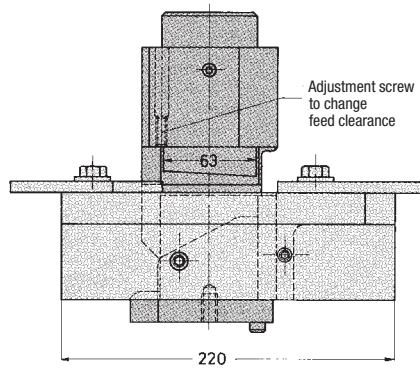


Figure shows 600-063 R with 800-063 S

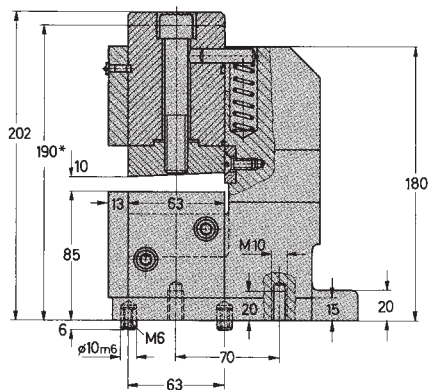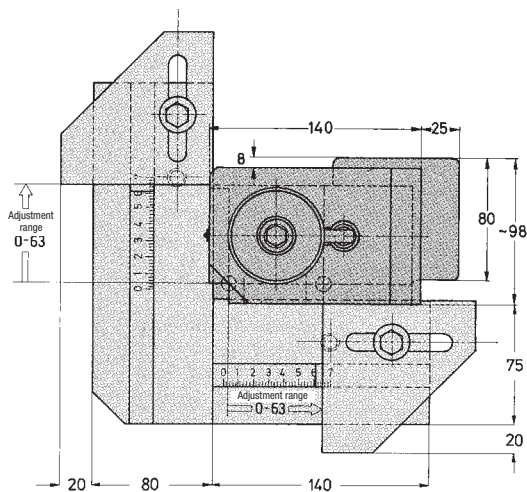


Notch examples

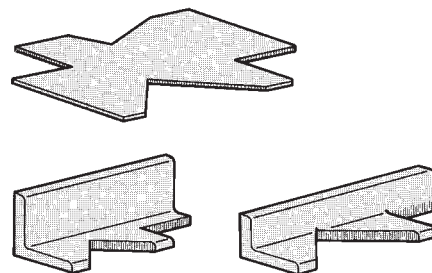

* Notch unit closed, upper blade inserted to full depth

90° notch units without gauging table with cutting tools			Gauging table (adjustable) has to be ordered separately		
Version		Weight	Appropriate for notch units		Weight
Left hand	Right hand	~	600-063 L	600-063 R	~
Order No.	Order No.	[kg]	Order No.	Order No.	[kg]
600-063 L	600-063 R	15	800-063 S	800-063 S	6.5

90° notch units, notch size 63x63 mm

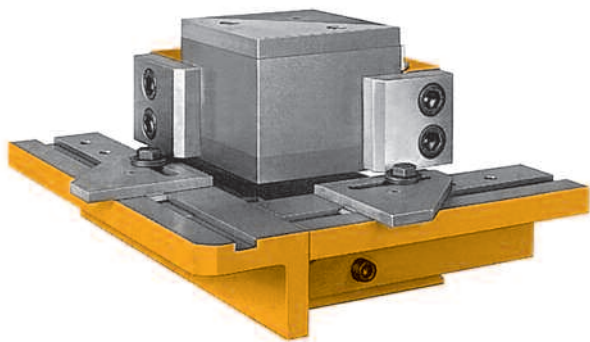

600-125 R with gauging table 800-125 S

Cutting angle 90°
Max. notch size 125x125 mm
Material thickness with steel St 60 0.3–8 mm

The **notch units**, adjusted to a die clearance of 0.1 mm, are pre-set in the factory for cutting material with a thickness of 0.3–3 mm. With the metal compensation sheets (0.2 mm) included in the delivery, the die clearance can be set to 0.2 or 0.3 mm for greater material thickness. With the adjustable **gauging table** the notch size can be adjusted continuously in two directions from 0–125 mm. The gauging table has to be ordered separately.

Quotations for notch units with notch sizes 25x25 mm, 160x160 mm and 200x200 mm can be provided on request.




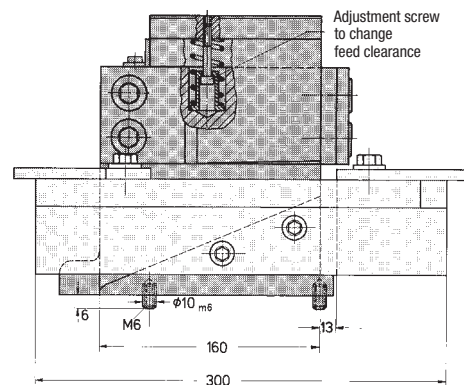






Figure shows 600-125 R with 800-125 S

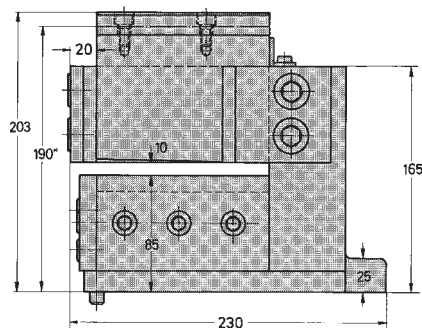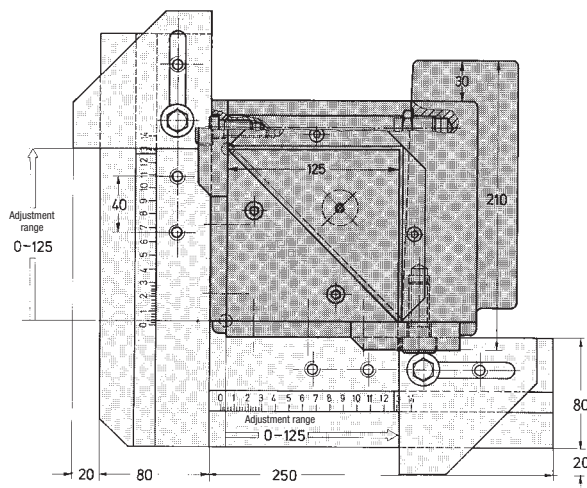

Notch examples

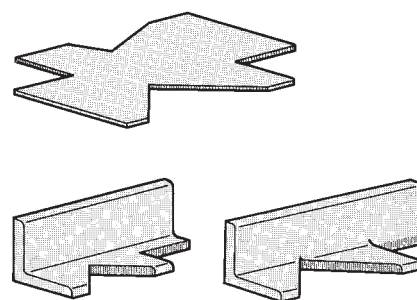

* Notch unit closed, upper blade inserted to full depth

90° notch units without gauging table with cutting tools			Gauging table (adjustable) has to be ordered separately		
Version		Weight	Appropriate for notch units		Weight
Order No.	Order No.	[kg]	Order No.	Order No.	[kg]
 Left hand 600-125 L	 Right hand 600-125 R	~ 36	 600-125 L 600-125 R	 800-125 S	~ 5

Rectangle notch units 50x50 und 100x75 mm



601-050

Notch shape rectangle

Notch size

version 601-050 50x50 mm

version 601-100 100x75 mm

Material thickness with steel St 60 0.3–3 mm

The various possibilities for using these rectangle notch units are illustrated below.

The required die clearance is set in the factory in accordance with the material thickness indicated in the order.



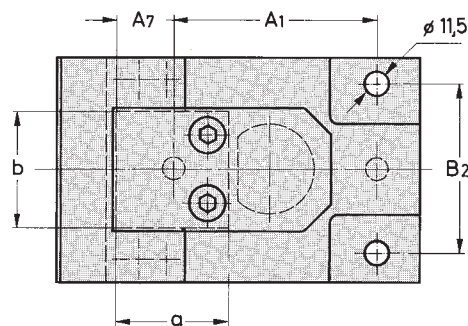


Figure shows 601-050


Possible notch and separation shapes available

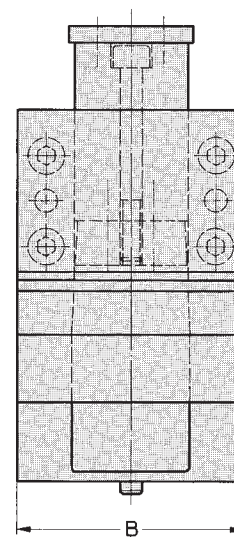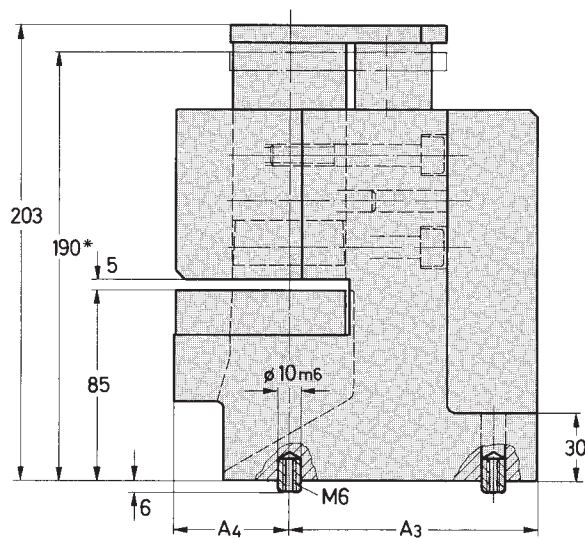

* Notch unit closed, shaped punch inserted

Rectangle notch units with cutting tools	Notch size	a	b	A ₁	A ₃	A ₄	A ₇	B	B ₂	Weight ~
Order No.	Width x depth									[kg]
601-050	50 x 50	50	50	90	110	50	25	100	75	16
601-100	100 x 75	75	100	100	120	75	37.5	150	100	27

Radius cut unit, R 3–20 mm



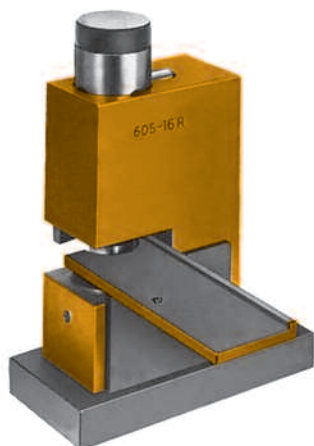


605-16 R


Possible radii R 3–20mm¹⁾
Cutting angle α , max. 180°
Material thickness for steel St 60, max. 6 mm

Order specifications for punch kit (please order separately)




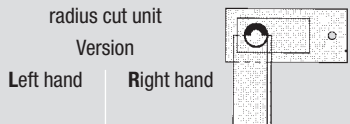
Version right hand or left hand	R oder L
Radius R	R _____ mm
Cutting angle α , (see examples)	_____ °
Material thickness	_____ mm
Material and strength	_____

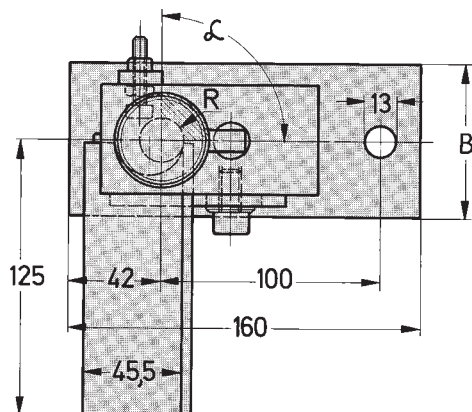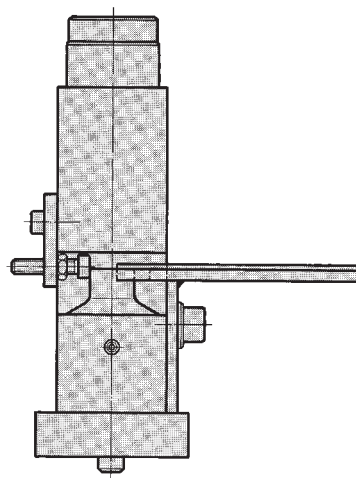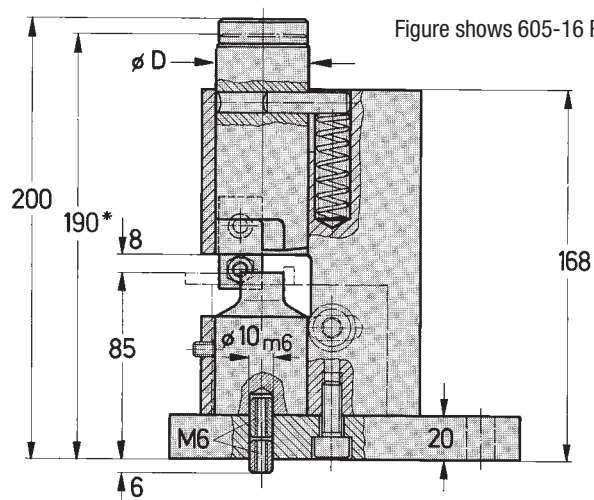


Examples

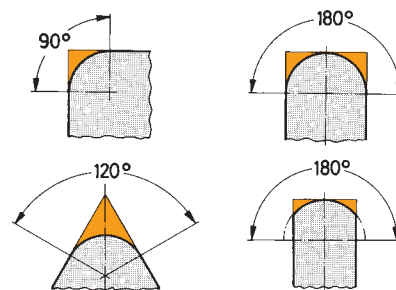

* Radius cut unit closed, upper punch completely inserted

Radius cut units with gauging table, without cutting tools					Punch kit has to be ordered separately. Additional order specifications see above.		
Version		Radius cut sizes	B	ØD	Weight ~	Corresponding to radius cut unit Version	
Left hand	Right hand					Left hand	Right hand
							
Order No.	Order No.				[kg]	Order No.	Order No.
605-16 L	605-16 R	R3-16	70	42	6.5	605-16-05 L	605-16-05 R
605-20 L	605-20 R	R3-20	70	50	7.5	605-20-05 L	605-20-05 R

Radius cut units, R 5–30 mm

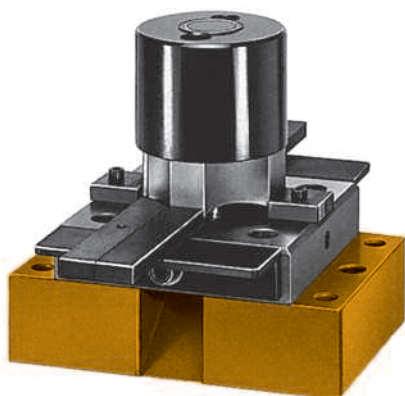

Possible radii R 5, 10, 15, 20, 25, 30 mm

Cutting angle α , 90°




Material thickness for steel St 37, max. 5 mm

In addition to the pneumatic and hydraulic radius cut units, press-operated radius cut units are introduced on this page.

By adjusting the limit stops the radius tool unit enables the production of six different 90° radii with only one punching tool.



The graduation of the radii is divided into steps of 5 mm from R 5 mm up to R 30 mm.

Other radii are available on request.

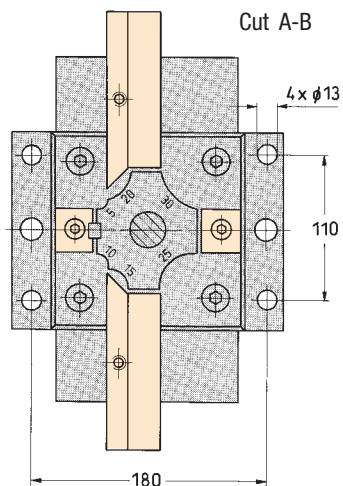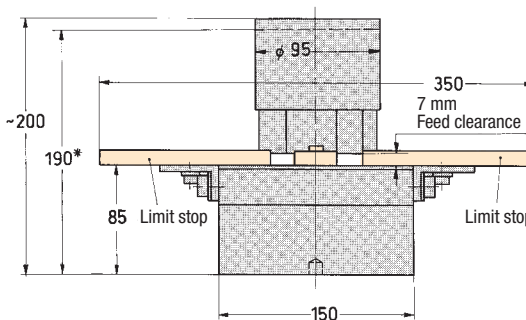

= adjustable limit stops

Examples



* Radius cut unit closed, upper punch completely inserted

Radius cut unit with cutting tools		
Order No.	Possible radii R	Weight ~ [kg]
606-30	5,10,15 20,25,30	22

Note:

Please state preferred material quality and thickness when ordering

Cut-off units, cutting width 125 und 250 mm



610-125-N

Cutting width, max.

version 610-125-N **125 mm**

version 610-250-N **250 mm**

Material thickness with steel St 60 0.3–8 mm

The **cut-off units**, adjusted to a die clearance of 0.1 mm, are pre-set in the factory for cutting material with a thickness of 0.3–3 mm. With the metal compensation sheets (0.2 mm) included in the delivery, the die clearance can be set to 0.2 or 0.3 mm for greater material thickness.

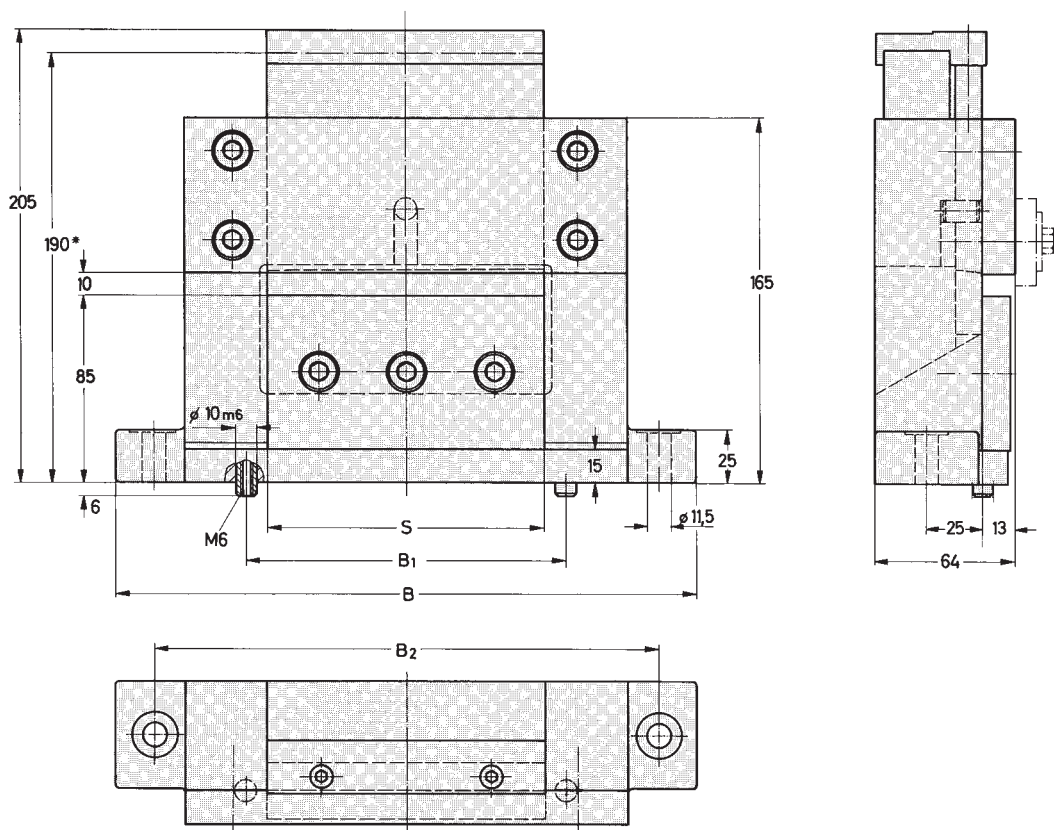


Figure shows cut-off unit 610-125-N

* Cut-off unit closed, upper blade inserted to full depth

Cut-off units with cutting tools and retainer	Cutting width S	Total width B	B ₁	B ₂	Weight ~
Order No.					[kg]
610-125-N	125	266	150	230	15
610-250-N	250	412	250	380	26

Cut-off units with larger cutting widths (e.g. 350, 400, 500 mm) are available on request.



624-2080

These pneumatic table presses have been designed for use with a press-operated punching, notch or cut-off unit.

One advantage of these table presses is their mobility, i.e. they can be used at any location. By using additional exchange plates, it is possible to mount the tool units outside of the press.


As a result, the tool units can be inserted or removed quickly and easily.

The material support height is **135 mm** with exchange plate, **125 mm** without exchange plate.

The cutting force required determines the usage limit for the table press, see the cutting force chart.

The cutting force, which results from the hole diameter, the material thickness and the material strength, may not exceed the maximum cylinder force.

Suitable tool units²⁾



Punching units
100 – 104



Notch units
600-063 L/R
601-050

+


+




Exchange plate has to be ordered separately

²⁾ Further combinations of tool units with pneumatic table presses are available on request.

Example of a pneumatic table press with the punching unit inserted, together with an exchange plate ▶

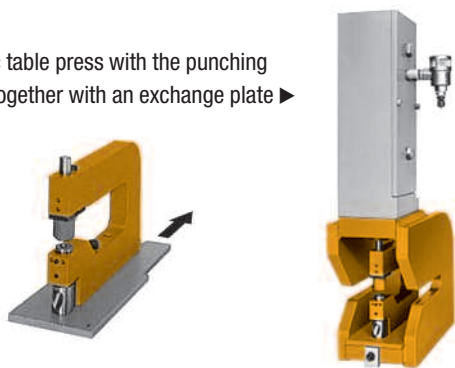

Pneumatic table presses

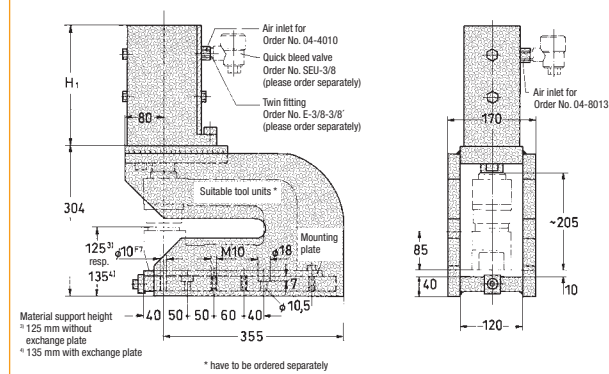

Pneumatic	Pneumatic table presses						Exchange plate has to be ordered separately for			
	Max. force		Cylinder type	Flange type	H_1	Weight	Punching units,	Notch units,	Cut-off units,	Weight
	with air supply pressure of 8 bar [kN]	with oil supply pressure of 350 bar [kN]								
Order No.			Order No.	Order No.			Order No.	Order No.	Order No.	[kg]
624-2040	40	–	04-4010	–	234	76	816-120-350L	816-120-350K	816-120-350A	3
624-2080	80	–	04-8013	–	405	94				



626-2109

These hydraulic table presses have been designed for use with a press-operated punching, notch or cut-off unit.

One advantage of these table presses is their mobility, i.e. they can be used at any location. By using additional exchange plates, it is possible to mount the tool units outside of the press.

As a result, the tool units can be inserted or removed quickly and easily.

The material support height is **135 mm** with exchange plate, **125 mm** without exchange plate.

The cutting force, which results from the hole diameter, the material thickness and the material strength, may not exceed the maximum cylinder force.

Suitable tool units²⁾



Punching units
100 – 104



Notch units
600-063 L/R
601-050

+

+




Exchange plate has to be ordered separately

²⁾ Further combinations of tool units with hydraulic table presses are available on request.

Example of a hydraulic table press with the punching unit inserted, together with an exchange plate ▶




Hydraulic table presses

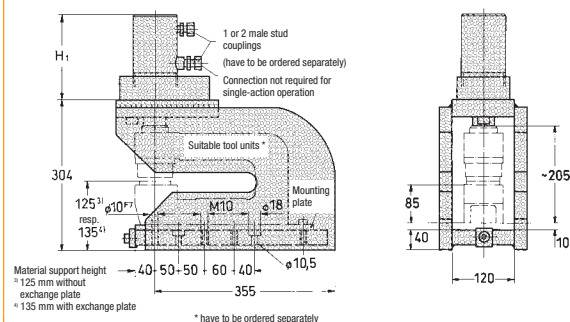


Hydraulic double-action	Hydraulic table presses					Exchange plate has to be ordered separately for		
	Max. force with oil supply pressure of 350 bar [kN]	Cylinder type	Flange type	H ₁ ~	Weight ~ [kg]	Punching units,	Notch units,	Weight ~
Order No.		Order No.	Order No.			Order No.	Order No.	[kg]
626-2068	68	725D50151-1	F004-A011-0000	154	55	816-120-350L	816-120-350K	3
626-2109	109	725D63171-1	F004-0023-0000	169	62			


Examples

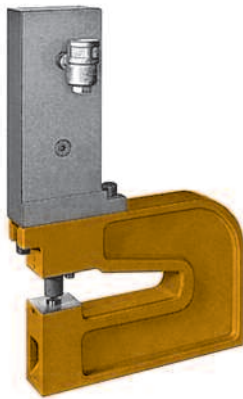

141-2020
Cylinder force 20 kN
Throat depth range A=200 mm

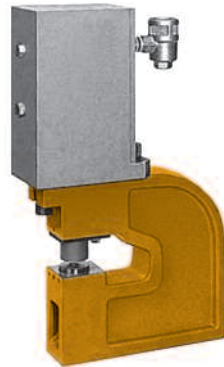

142-1040 F
Cylinder force 40 kN
Throat depth range A=100 mm

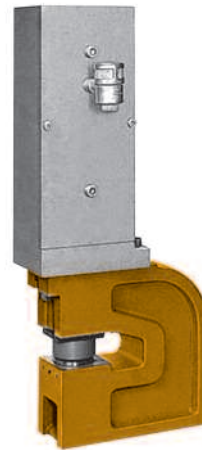


143-1080 F
Cylinder force 80 kN
Throat depth range A=100 mm




144-1080 F
Cylinder force 80 kN
Throat depth range A=100 mm

Connection examples for several punching units

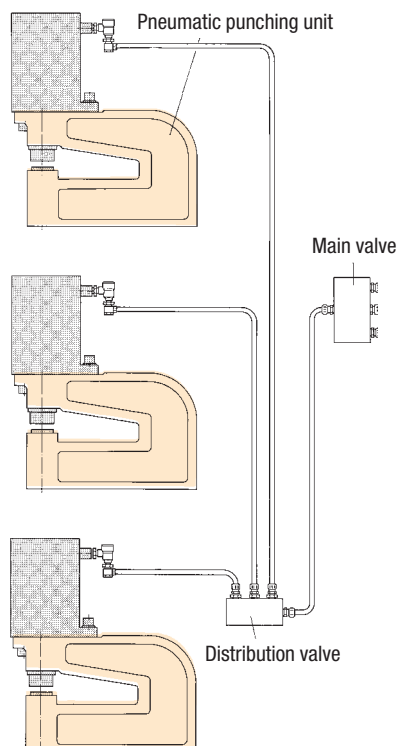

Driven by pneumatic power cylinder, single-action

Round and shaped cut	
Hole diameter	for series 141 2–13 mm
	for series 142 8–25 mm
	for series 143 25–40 mm

Only round cut		Shaped cut on request
for series 144		40–63 mm

Material thickness	
with steel	0.3–3 mm*
with aluminium and plastics	0.3–5 mm*

* The cylinder force has to exceed the required cutting force.

Pneumatic punching units can be used independently from a press, as they are driven by the powerful pneumatic power cylinder and only need compressed air as a power source.

The pneumatic power cylinders are single-action; for optimum fast reversal, they additionally require a 3/2 way valve, as well as a quick bleed valve; see also the illustrated connection examples.

The material support height is **125 mm**.

The punching units should be selected according to the punch diameter, material thickness, material strength and the resulting cutting force required.

The different cylinder sizes are interchangeable, as they have the same mounting dimensions. If the cutting force is insufficient the next more powerful cylinder can be used. Double-action hydraulic cylinders, including the mounting flange, can be retrofitted.

The best application for pneumatic punching units is punch work with thin metal sheets up to 3 mm thickness because of their progressive characteristic feature.

With an air supply pressure of maximum 8 bar the cylinder force achieves capacities of 12, 20, 40 or 80 kN depending on the cylinder type.

An obligatory stripping unit can be implemented on request.




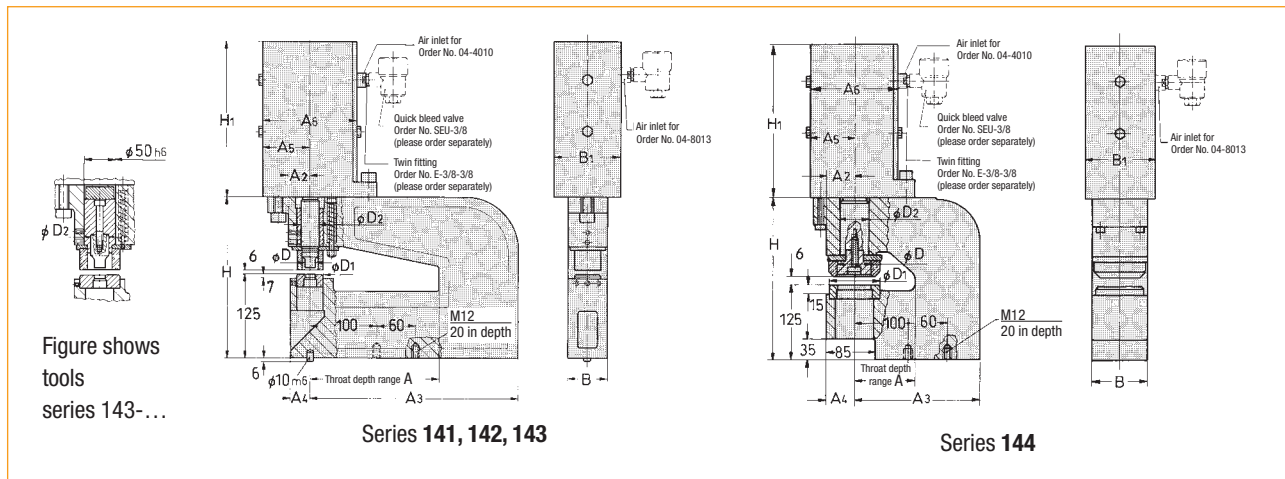


Figure shows tools series 143-...

Order No.	Throat depth range A	Hole diameter D	Max. force at 8 bar [kN]	A ₂	A ₃	A ₄	A ₅	A ₆	B	B ₁	D ₁	D ₂	H	H ₁	Cylinder type Order No.	Weight ~ [kg]
141-1012F	100	2-13	15	30	220	30	65	110	60	50	22	15	244	228	04-1212	22
141-1020F	100	2-13	20	30	220	30	61	122	60	65	22	15	244	300	04-2010	28
141-1040F	100	2-13	40	30	220	30	72	144	60	108	22	15	244	234	04-4010	33
141-1080F	100	2-13	80	30	220	30	77	154	60	122	22	15	244	405	04-8013	53
141-2012F	200	2-13	15	30	320	30	65	110	60	50	22	15	244	228	04-1212	28
141-2020F	200	2-13	20	30	320	30	61	122	60	65	22	15	244	300	04-2010	34
141-2040F	200	2-13	40	30	320	30	72	144	60	108	22	15	244	234	04-4010	39
141-2080F	200	2-13	80	30	320	30	77	154	60	122	22	15	244	405	04-8013	59
142-1012F	100	8-25 ¹⁾	15	30	220	30	65	110	60	50	42	28	244	228	04-1212	22
142-1020F	100	8-25 ¹⁾	20	30	220	30	61	122	60	65	42	28	244	300	04-2010	28
142-1040F	100	8-25 ¹⁾	40	30	220	30	72	144	60	108	42	28	244	234	04-4010	33
142-1080F	100	8-25 ¹⁾	80	30	220	30	77	154	60	122	42	28	244	405	04-8013	53
142-2012F	200	8-25 ¹⁾	15	30	320	30	65	110	60	50	42	28	244	228	04-1212	28
142-2020F	200	8-25 ¹⁾	20	30	320	30	61	122	60	65	42	28	244	300	04-2010	34
142-2040F	200	8-25 ¹⁾	40	30	320	30	72	144	60	108	42	28	244	234	04-4010	39
142-2080F	200	8-25 ¹⁾	80	30	320	30	77	154	60	122	42	28	244	405	04-8013	59
143-1040F	100	25-40 ²⁾	40	45	220	40	72	144	90	108	63	30	265	234	04-4010	46
143-1080F	100	25-40 ²⁾	80	45	220	40	77	154	90	122	63	30	265	405	04-8013	66
143-2040F	200	25-40 ²⁾	40	45	340	40	72	144	90	108	63	30	265	234	04-4010	59
143-2080F	200	25-40 ²⁾	80	45	340	40	77	154	90	122	63	30	265	405	04-8013	79
144-1040F	100	40-63	40	48	220	50	72	144	100	108	90	50	270	234	04-4010	60
144-1080F	100	40-63	80	48	220	50	77	154	100	122	90	50	270	405	04-8013	85
144-2040F	200	40-63	40	48	320	50	72	144	100	108	90	50	270	234	04-4010	79
144-2080F	200	40-63	80	48	320	50	77	154	100	122	90	50	270	405	04-8013	102



Punching tools suitable for the punching units above


Punching unit without punching tools		Punching tools have to be ordered separately			
Order No.	Hole diameter meter range ØD	Punch kit	Round punch	Die	Shaped punch
141-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
142-.... F	8-25 ¹⁾	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST
143-.... F	25-40 ²⁾	503-Ø-BL-ST	303-Ø	403-Ø-BL-ST	503-Formloch-BL-ST
144-.... F	40-63	524-Ø-BL-ST	324-Ø	404-Ø-BL-ST	on request

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**


¹⁾ To punch hole diameters from 2-8 mm, you also have to order reduction bushes and reduction sockets.

²⁾ Punching tools for Ø 20-25 mm are available on request.


Examples




162-1068 F
Cylinder force 68 kN
Throat depth range A=100 mm

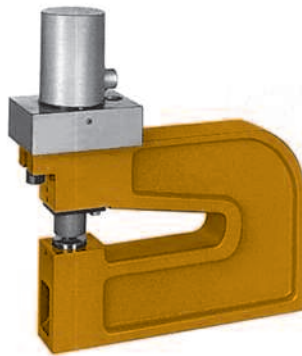

162-2068 F
Cylinder force 68 kN
Throat depth range A=200 mm

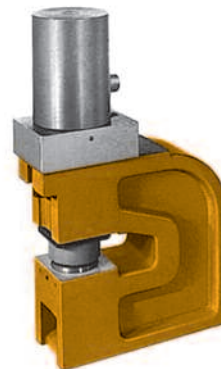

163-1175 F
Cylinder force 175 kN
Throat depth range A=100 mm

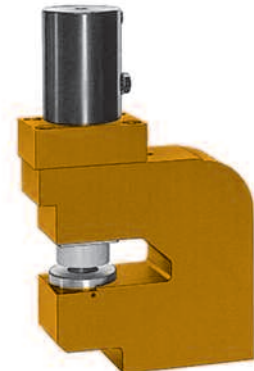


164-1175 F
Cylinder force 175 kN
Throat depth range A=100 mm

Connection examples

for one or several punching units


Power supply

Air-driven hydraulic pump

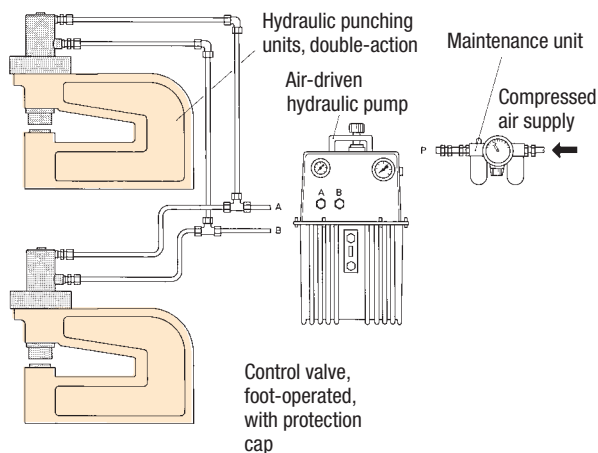


Power supply

Electro-hydraulic pump unit

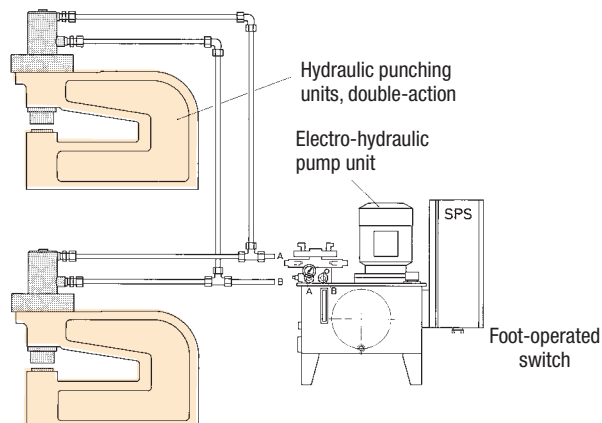

Driven by
hydraulic cylinder, double-action

Round and shaped cut	
Hole diameter	for series 161 2–13 mm
	for series 162 8–25 mm
	for series 163 25–40 mm

Only round cut  Shaped cut on request
for series 164 40–63 mm

Material thickness
with steel 0.3–3 mm*; max. 5 mm*
with aluminium and plastics 0.3–5 mm*

* The cylinder force has to exceed the required cutting force.

Hydraulic punching units, fit with double-action hydraulic cylinders are capable of working independently from a press. They are driven by a hydraulic power supply, e.g. an air-driven hydraulic pump, or an electro-hydraulic pump unit.


With the available hydraulic cylinders, cylinder forces of 33, 68, 109 or 175 kN can be achieved for an oil supply pressure of max. 350 bar. The material support height is **125 mm**.

The punching units should be selected according to the hole diameter, material thickness, material strength and the resulting cutting force required. The cutting force required can be obtained from the chart. The type of power supply also depends on the number of punching units in operation and the desired cycle time.





The connection examples on the left illustrate the operation of one or several hydraulic punching units.

The mounting flanges of the hydraulic cylinders have the same mounting dimensions. As a result the cylinder size, including the mounting flange, can be exchanged if the cutting force is insufficient.

An obligatory stripping unit can be implemented on request.

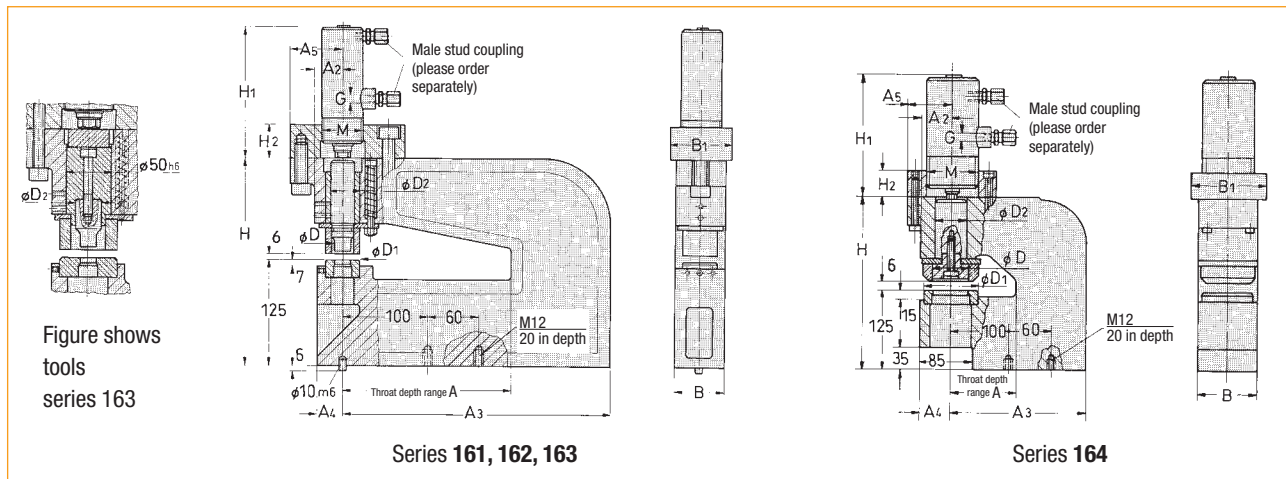

Order No.	Throat depth range	Hole diameter D	Max. force at 350 bar [kN]	A ₂	A ₃	A ₄	A ₅	B	B ₁	D ₁	D ₂	H	H ₁	H ₂	M	G	Cylinder type including flange ⁹ Order No.	Weight ~ [kg]
161-1033 F	100	2-13	33	30	220	30	58	60	60	22	15	244	165	40	M48x1,5	G1/4	725D35151-FL	21
161-1068 F	100	2-13	68	30	220	30	60	60	80	22	15	244	151	40	M64x1,5	G1/4	725D50151-FL	23
161-1109 F	100	2-13	109	30	220	30	66	60	100	22	15	244	158	48	M80x2,0	G1/4	725D63171-FL	26
161-2033 F	200	2-13	33	30	320	30	58	60	60	22	15	244	165	40	M48x1,5	G1/4	725D35151-FL	27
161-2068 F	200	2-13	68	30	320	30	60	60	80	22	15	244	151	40	M64x1,5	G1/4	725D50151-FL	29
162-1033 F	100	8-25 ¹⁾	33	30	220	30	58	60	60	42	28	244	165	40	M48x1,5	G1/4	725D35151-FL	21
162-1068 F	100	8-25 ¹⁾	68	30	220	30	60	60	80	42	28	244	151	40	M64x1,5	G1/4	725D50151-FL	23
162-1109 F	100	8-25 ¹⁾	109	30	220	30	66	60	100	42	28	244	158	48	M80x2,0	G1/4	725D63171-FL	26
162-2033 F	200	8-25 ¹⁾	33	30	320	30	58	60	60	42	28	244	165	40	M48x1,5	G1/4	725D35151-FL	27
162-2068 F	200	8-25 ¹⁾	68	30	320	30	60	60	80	42	28	244	151	40	M64x1,5	G1/4	725D50151-FL	29
163-1033 F	100	25-40 ²⁾	33	45	220	40	58	90	60	63	30	265	170	40	M48x1,5	G1/4	725D35151-FL	34
163-1068 F	100	25-40 ²⁾	68	45	220	40	60	90	80	63	30	265	156	40	M64x1,5	G1/4	725D50151-FL	36
163-1109 F	100	25-40 ²⁾	109	45	220	40	66	90	100	63	30	265	161	48	M80x2,0	G1/4	725D63171-FL	39
163-1175 F	100	25-40 ²⁾	175	45	220	40	66	90	105	63	30	265	195	48	M80x2,0	G3/8	725D80151-FL	45
163-2033 F	200	25-40 ²⁾	33	45	340	40	58	90	60	63	30	265	170	40	M48x1,5	G1/4	725D35151-FL	47
163-2068 F	200	25-40 ²⁾	68	45	340	40	58	90	80	63	30	265	156	40	M64x1,5	G1/4	725D50151-FL	49
163-2109 F	200	25-40 ²⁾	109	45	340	40	66	90	100	63	30	265	161	48	M80x2,0	G1/4	725D63171-FL	52
164-1109 F	100	40-63	109	48	220	48	58	100	100	90	50	270	169	48	M80x2,0	G1/4	725D63171-FL	49
164-1175 F	100	40-63	175	48	220	48	66	100	105	90	50	270	195	48	M80x2,0	G3/8	725D80151-FL	55
164-2109 F	200	40-63	109	48	320	48	58	100	100	90	50	270	169	48	M80x2,0	G1/4	725D63171-FL	68
164-2175 F	200	40-63	175	48	320	48	66	100	105	90	50	270	195	48	M80x2,0	G3/8	725D80151-FL	73



Punching tools suitable for the punching units above

Punching unit without punching tools	Hole diameter meter range	Punching tools have to be ordered separately			
		Punch kit	Round punch	Die	Shaped punch
Order No.	ØD	Order No.	Order No.	Order No.	Order No.
161-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
162-.... F	8-25 ¹⁾	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST
163-.... F	25-40 ²⁾	503-Ø-BL-ST	303-Ø	403-Ø-BL-ST	503-Formloch-BL-ST
164-.... F	40-63	524-Ø-BL-ST	324-Ø	404-Ø-BL-ST	on request


¹⁾To punch hole diameters from 2-8 mm, you also have to order reduction bushes and reduction sockets.

²⁾Punching tools for Ø 20-25 mm are available on request.


⁹⁾If you require the cylinder without the mounting flange, omit the letters »FL« in the order no.

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

Examples

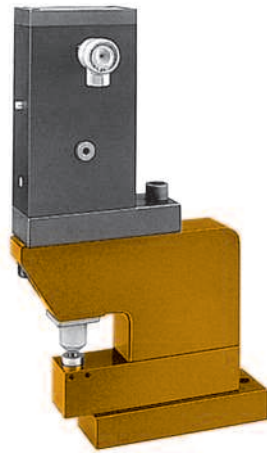


141-0520 F
Cylinder force 20 kN

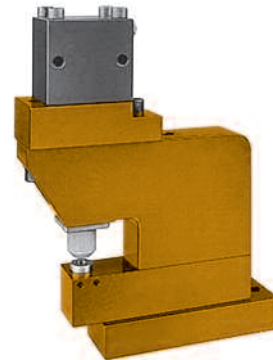


161-0524 F
Cylinder force 24 kN

Application examples

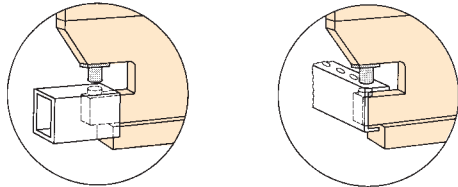

Driven by
pneumatic power cylinder, single-action,
hydraulic cylinder, double-action

Round and shaped cut	
Hole diameter	2–13 mm
Material thickness	
with steel	0.3–3 mm*
with aluminium and plastics	0.3–5 mm*

* The cylinder force has to exceed the required cutting force.

These pneumatic and hydraulic profile punching units are suitable for a wide range of applications. The special die support at the front enables punching of round and square pipes or the shanks of U and H profiles arranged in parallel.

Which available unit to use is determined by the required cutting force. The cutting force results from the hole diameter, material thickness and material strength. Refer to the cutting force chart.

The type of power supply also depends on the number of punching units to be operated and the desired cycle time.


The pneumatic power cylinders are single-action and, in addition, require a quick bleed valve for quick reversal.

The material support height is **85 mm**.

A height compensation plate for a material support height of 125 mm is available on request.



Pneumatic and hydraulic profile punching units, single- and double-action

An obligatory stripping unit can be implemented on request.

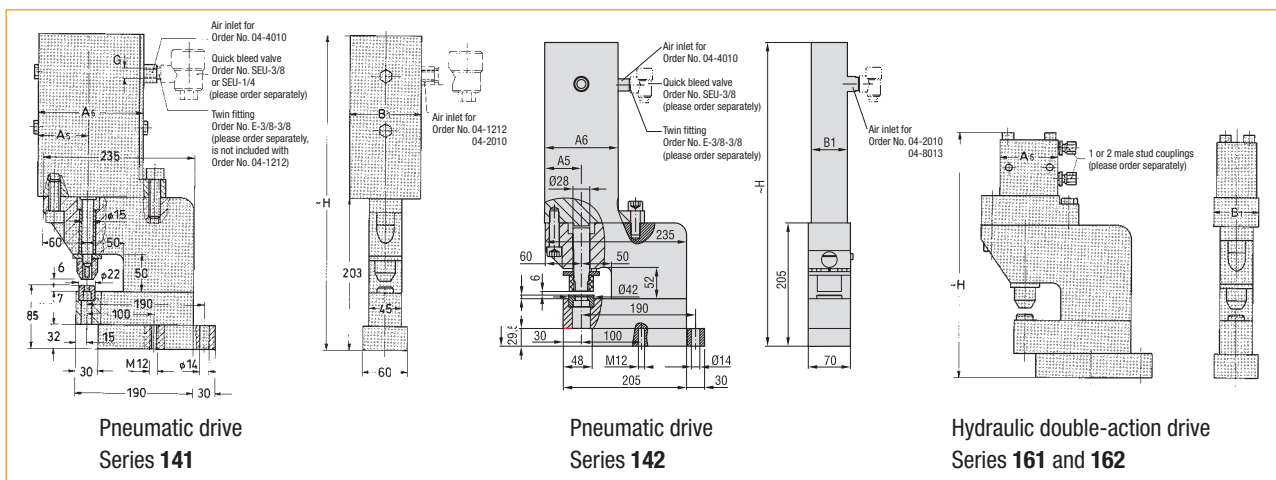

Profile punching units without punching tools		Throat depth range	hole Ø	Max. force		Cylinder type combination of cylinder and flange	A ₅	A ₆	B ₁	G	H	Weight ~ [kg]
pneumatic	hydraulic, double-action			with air supply pressure of 8 bar [kN]	with oil supply pressure of 500 bar [kN]							
Order No.	Order No.	A	D			Order No.						
141-0512 F	-	50	2-13	12	-	04-1212	55	110	60	1xG 1/4	431	19
141-0520 F	-	50	2-13	20	-	04-2010	61	122	60	1xG 3/8	504	24
141-0540 F	-	50	2-13	40	-	04-4010	72	144	108	1xG 3/8	438	31
142-0520 F	-	50	8-25	12	-	04-2010	61	122	60	1xG 3/8	505	31
142-0540 F	-	50	8-25	20	-	04-4010	72	144	108	1xG 3/8	439	37
142-0580 F	-	50	8-25	40	-	04-8013	77	154	122	1xG 3/8	610	39
-	161-0524 F	50	2-13	-	24	722D25202-FL ⁴⁾	-	65	45	2xG 1/4	333	14
-	161-0540 F	50	2-13	-	40	722D32252-FL ⁴⁾	-	75	60	2xG 1/4	344	15
-	161-0563 F	50	2-13	-	63	722D40252-FL ⁴⁾	-	85	70	2xG 1/4	348	16
-	162-0524 F	50	8-25	-	24	722D25202-FL ⁴⁾	-	65	45	2xG 1/4	325	21
-	162-0540 F	50	8-25	-	40	722D32252-FL ⁴⁾	-	75	60	2xG 1/4	342	22
-	162-0563 F	50	8-25	-	63	722D40252-FL ⁴⁾	-	85	70	2xG 1/4	343	23


⁴⁾ If you require the cylinder without the mounting flange, omit the letters »FL« in the Order No.



Punching tools suitable for the punching units above

Punching unit without punching tools		Punching tools have to be ordered separately			
Order No.	Hole diameter meter range ØD	Round punch ●		Shaped punch ■■■■	
		Punch kit	Punch	Die	Punch kit
Order No.	ØD	Order No.	Order No.	Order No.	Order No.
141-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
161-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
142-.... F	8-25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST
162-.... F	8-25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

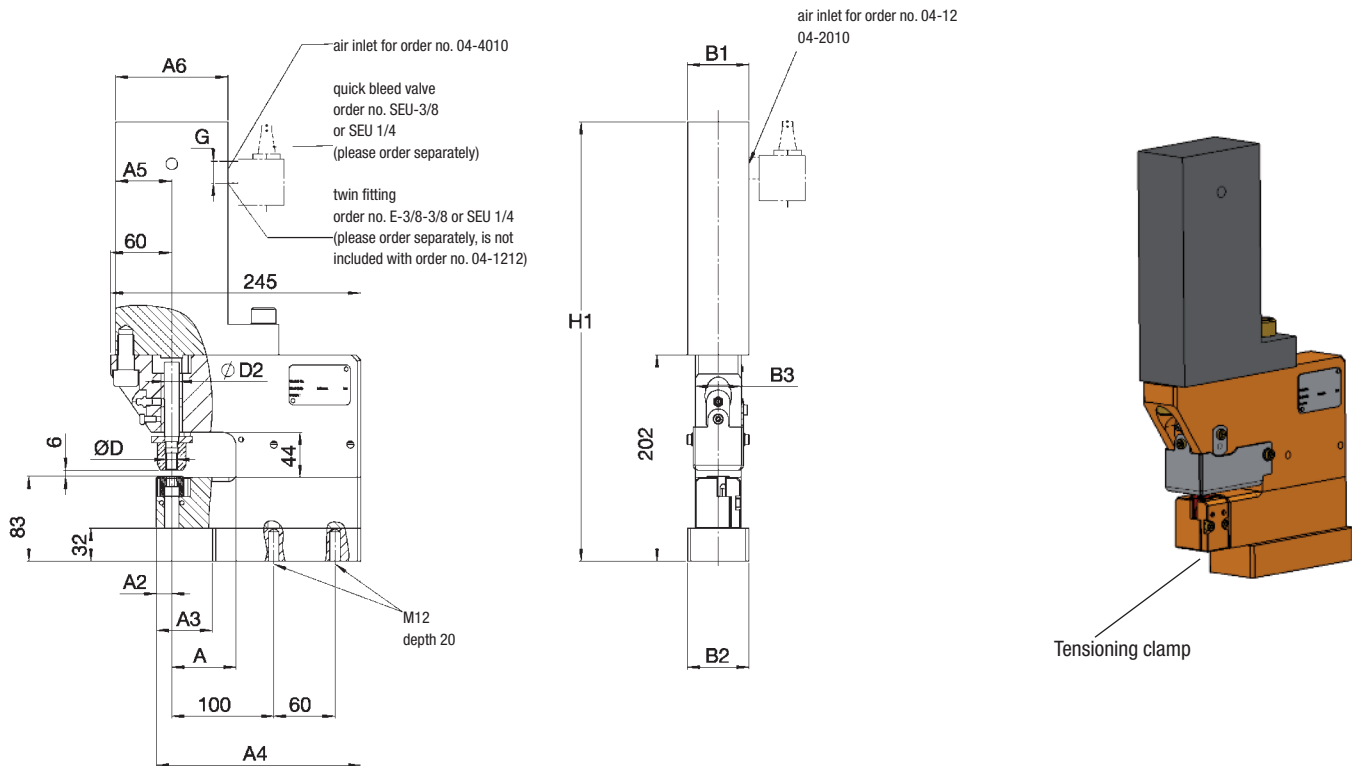

Pneumatic profile punching units, single-action – without punching tools


Order no.	Hole ØD	Throat depth range A	Max. force with air supply pressure of 8 bar [kN]	Cylinder type ⁹⁾ Order no.	ØD2	A2	A3	A4	A5	A6	B1	B2	B3	G	H1	Weight ~ [kg]
141-0712F-01	2-13	63	12	04-1212	15	15	55	200	55	110	60	54	45	1xG1/4	430	19
141-0720F-01	2-13	63	20	04-2010	15	15	55	200	60	120	60	54	45	1xG3/8	502	24
141-0740F-01	2-13	63	40	04-4010	15	15	55	200	72	147	108	54	45	1xG3/8	436	30
142-0720F-01	8-25	63	12	04-2010	28	26	66	211	60	120	60	70	70	1xG3/8	502	32
142-0740F-01	8-25	63	20	04-4010	28	26	66	211	72	147	108	70	70	1xG3/8	436	37
142-0780F-01	8-25	63	40	04-8013	28	26	66	211	77	154	122	70	70	1xG3/8	607	59

⁹⁾An obligatory stripping unit can be implemented on request. Order example: 141Z-07...

Punching tools suitable for the punching units above

Punching unit without punching tools		Punching tools have to be ordered separately			
Order no.	Hole-Ø diameter range ØD	Round punch ●			Shaped ●●●●
		Punch kit Order no.	Punch Order no.	Die Order no.	Punch kit Order no.
141-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-shaped-hole-BL-ST
142-.... F	8-25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-shaped-hole-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

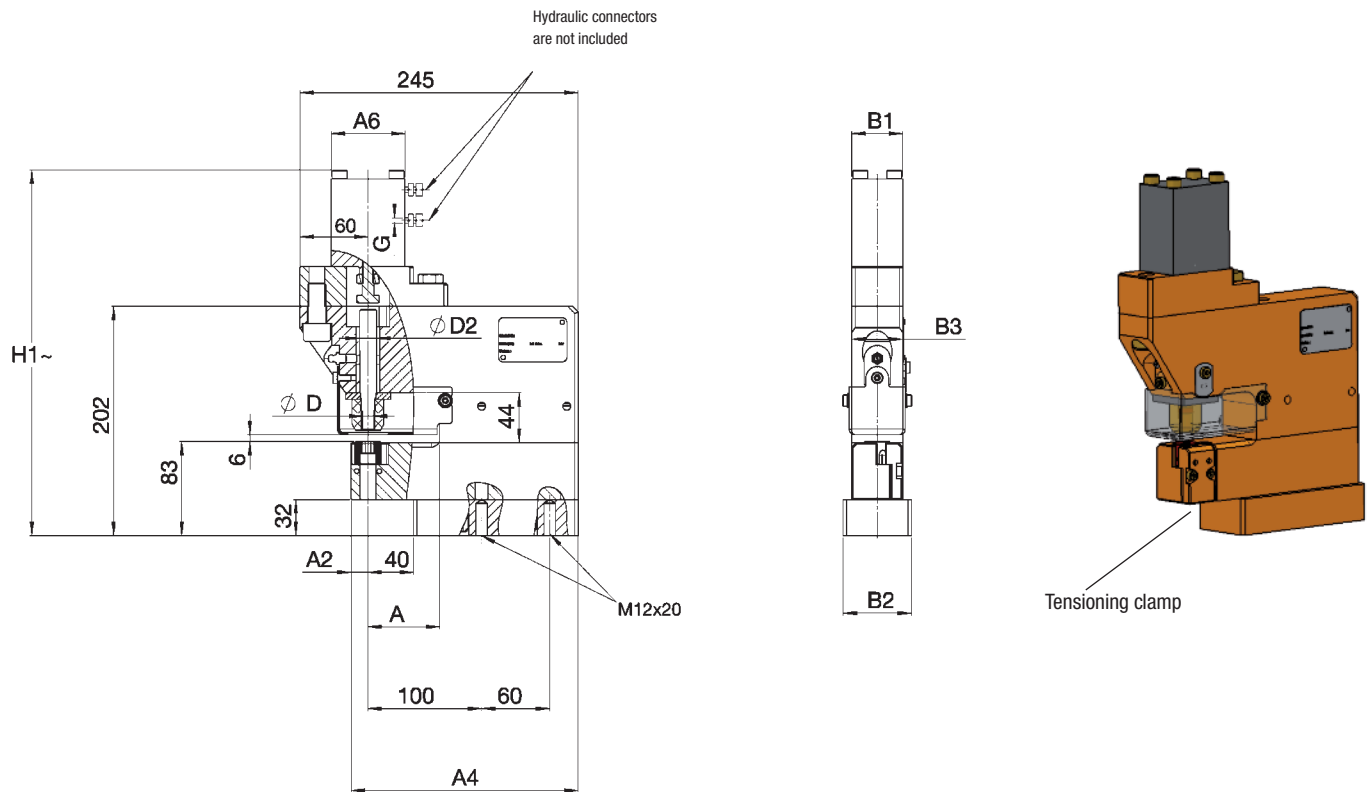

Hydraulic profile punching units, double action — without punching tools

Order no.	Hole ØD	Throat depth range A	Max. force with air supply pressure of 500 bar [kN]	Cylinder type ⁴⁾ Order no.	ØD2	A2	A4	A6	B1	B2	B3	G	H1	Weight ~ [kg]
161-0724F-01	2-13	63	24	722D25202-FL ⁴⁾	15	15	200	65	45	60	45	2xG1/4	322	16
161-0740F-01	2-13	63	40	722D32252-FL ⁴⁾	15	15	200	75	55	60	45	2xG1/4	339	18
161-0763F-01	2-13	63	63	722D40252-FL ⁴⁾	15	15	200	85	63	60	45	2xG1/4	340	19
162-0724F-01	8-25	63	24	722D25202-FL ⁴⁾	28	26	211	65	45	70	70	2xG1/4	317	24
162-0740F-01	8-25	63	40	722D32252-FL ⁴⁾	28	26	211	75	55	70	70	2xG1/4	339	25
162-0763F-01	8-25	63	63	722D40252-FL ⁴⁾	28	26	211	85	63	70	70	2xG1/4	340	26


4) If you require the cylinder without the mounting flange, omit the letters »FL« in the order no. | An obligatory stripping unit can be implemented on request. Order example: 141Z-08 ...

Punching tools suitable for the punching units above

Punching unit without punching tools		Punching tools have to be ordered separately			
Order no.	Hole-Ø diameter range ØD	Round punch ●			Shaped ●
		Punch kit Order no.	Punch Order no.	Die Order no.	Punch kit Order no.
161-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-shaped-hole-BL-ST
162-.... F	8-25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-shaped-hole-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

Examples

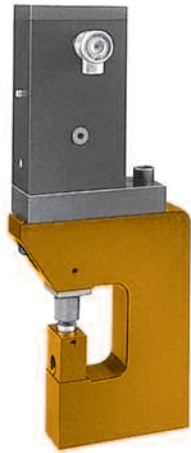

141-0612 F
Cylinder force 12 kN




161-0663 F
Cylinder force 63 kN




162-6109 F
Cylinder force 109 kN

Application examples

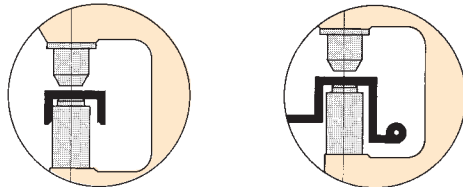

Driven by
pneumatic power cylinder, single-action,
hydraulic cylinder, double-action

Round and shaped cut	
Hole diameter	for series 141, 161 2–13 mm for series 142, 162 8–25 mm
material thickness	
with steel	0.3–3 mm*
with aluminium and plastics	0.3–5 mm*

* The cylinder force has to exceed the required cutting force.

These pneumatic and hydraulic profile punching units are suitable for a wide range of applications.

The clearance zone behind the die support makes them also suitable for punching L- and U-shaped profiles.

Which available unit to use is determined by the required cutting force.

The cutting force results from the hole diameter, material thickness and material strength. Refer to the cutting force chart.


The type of power supply also depends on the number of punching units to be operated and the desired cycle time.

The pneumatic power cylinders are single-action and, in addition, require a quick bleed valve for quick reversal.

The material support height is **125 mm**.




Pneumatic and hydraulic profile punching units, single- and double-action

An obligatory stripping unit can be implemented on request.

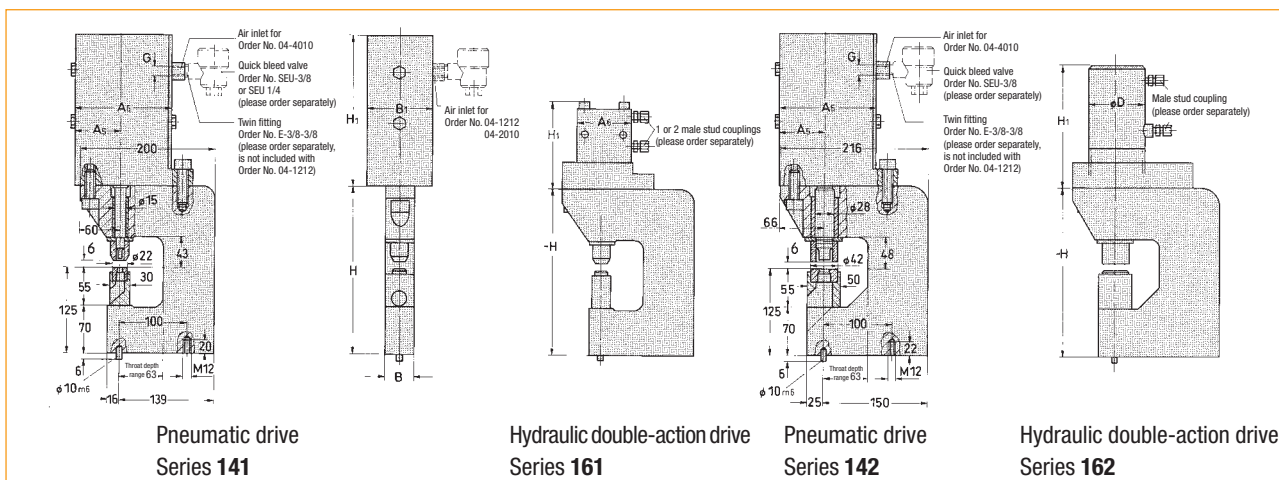

Profile punching units without punching tools		Hole Ø	Throat depth range	Max. force			Cylinder type combination of cylinder and flange	A ₅	A ₆	B	B ₁	G	H	H ₁	ØD	Weight ~ [kg]
pneumatic	hydraulic, double-action			with air supply pressure of 8 bar [kN]	with oil supply pressure of 350 bar [kN]	with oil supply pressure of 500 bar [kN]										
Order No.	Order No.	D	A													
141-0612 F	–	2-13	63	12	–	–	04-1212	55	110	45	60	1xG1/4	244	228	–	17
141-0620 F	–	2-13	63	20	–	–	04-2010	61	122	45	60	1xG3/8	244	300	–	23
141-0640 F	–	2-13	63	40	–	–	04-4010	72	144	45	108	1xG3/8	244	234	–	29
142-6320 F	–	8-25	63	20	–	–	04-2010	61	122	80	60	1xG 3/8	250	300	–	35
142-6340 F	–	8-25	63	40	–	–	04-4010	72	144	80	108	1xG 3/8	250	234	–	40
142-6380 F	–	8-25	63	80	–	–	04-8013	77	154	80	122	1xG 3/8	250	405	–	62
–	161-0624 F	2-13	63	–	–	24	722D25202-FL ⁴⁾	32,5	65	45	45	2xG1/4	244	129	–	16
–	161-0640 F	2-13	63	–	–	40	722D32252-FL ⁴⁾	37,5	75	45	60	2xG1/4	244	140	–	17
–	161-0663 F	2-13	63	–	–	63	722D40252-FL ⁴⁾	42,5	85	45	70	2XG1/4	244	144	–	18
–	162-6368 F	8-25	63	–	68	–	725D50151-FL ⁴⁾	32,5	–	80	80	2XG1/4	250	154	65	26
–	162-6109 F	8-25	63	–	109	–	725D63171-FL ⁴⁾	48,5	–	80	100	2XG1/4	250	169	97	29
–	162-6175 F	8-25	63	–	175	–	725D80151-FL ⁴⁾	52,5	–	80	105	2XG3/8	250	195	105	34

⁴⁾ If you require the cylinder without the mounting flange, omit the letters »FL« in the Order No.





Punching tools suitable for the punching units above


Punching unit without punching tools		Punching tools have to be ordered separately			
Order No.	Hole diameter range Ø	Round punch		Shaped punch	
		Punch kit	Punch	Die	Punch kit
Order No.	Ø	Order No.	Order No.	Order No.	Order No.
141-.... F	2–13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
142-.... F	8–25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST
161-.... F	2–13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
162-.... F	8–25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

illustration with block die series 141-08...-02 series 142-08...-02

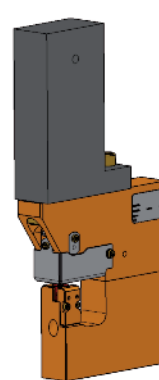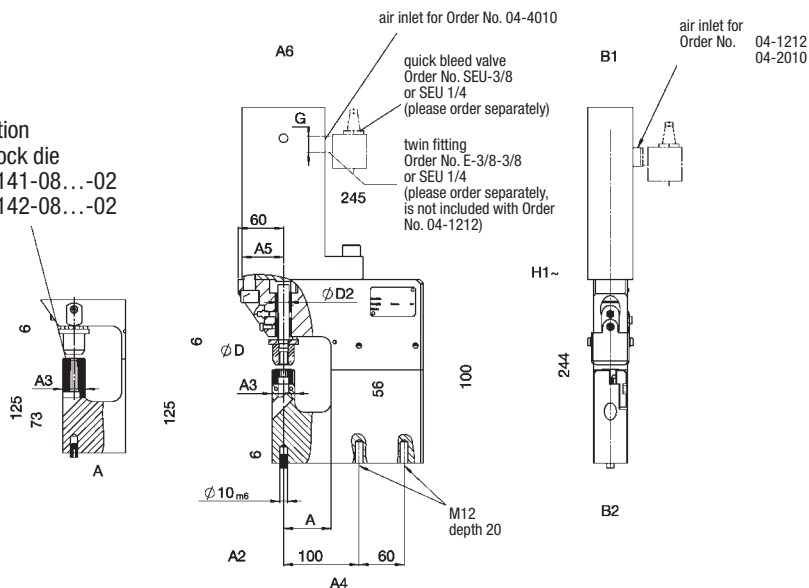

series: 141-08...-01
142-08...-01

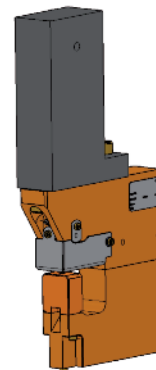

series: 141-08...-02
142-08...-02

pneumatic single-action drive

Pneumatic profile punching units, single-action — without punching tools

Order No.	Hole ØD	Throat depth range A	Max. force with air supply pressure of 8 bar [kN]	Cylinder type	ØD2	A2	A3	A4	A5	A6	B1	B2	G	H1~
141-0812F-01	2-13	63	12	04-1212	15	15	30	200	55	110	60	45	1xG1/4	472
141-0820F-01	2-13	63	20	04-2010	15	15	30	200	60	120	60	45	1xG3/8	544
141-0840F-01	2-13	63	40	04-4010	15	15	30	200	72	147	108	45	1xG3/8	478
141-0812F-02	2-13	63	12	04-1212	15	15	30	200	55	110	60	45	1xG1/4	472
141-0820F-02	2-13	63	20	04-2010	15	15	30	200	60	120	60	45	1xG3/8	544
141-0840F-02	2-13	63	40	04-4010	15	15	30	200	72	147	108	45	1xG3/8	478
142-0820F-01	8-25	63	20	04-2010	28	25	50	210	60	120	60	70	1xG3/8	544
142-0840F-01	8-25	63	40	04-4010	28	25	50	210	72	139	108	70	1xG3/8	478
142-0880F-01	8-25	63	80	04-8013	28	25	50	210	77	154	122	70	1xG3/8	649
142-0820F-02	8-25	63	20	04-2010	28	25	50	210	60	120	60	70	1xG3/8	544
142-0840F-02	8-25	63	40	04-4010	28	25	50	210	72	139	108	70	1xG3/8	478
142-0880F-02	8-25	63	80	04-8013	28	25	50	210	77	154	122	70	1xG3/8	649


An obligatory stripping unit can be implemented on request. Order example: 141Z-08 ...

Punching tools suitable for the punching units above

Punching unit without punching tools	Punching tools have to be ordered separately				
	Hole diameter range	Round punch			Shaped punch
Order No.	ØD	Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
141-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
142-.... F	8-25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

illustration with block die series 141-08...-02 series 161-08...-02

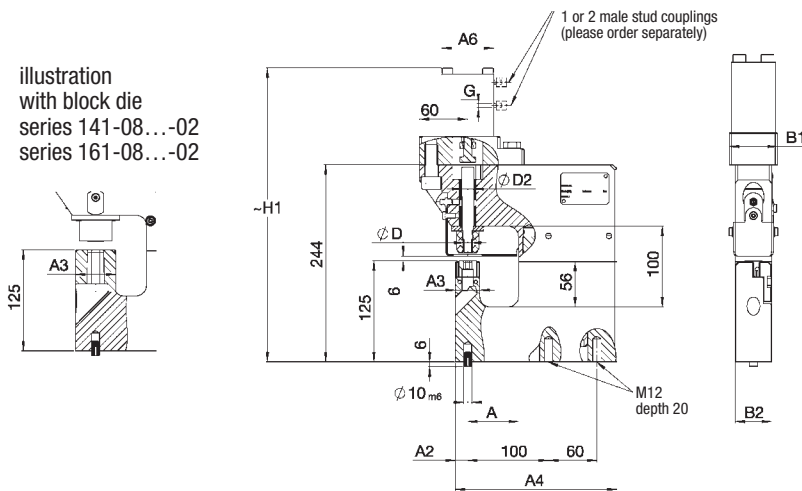

series: 161-08...-01
162-08...-01

hydraulic drive

series: 161-08...-02
162-08...-02
with block die

Hydraulic profile punching units — without punching tools

Order No.	Hole ØD	Throat depth range A	Max. force with oil supply pressure of 500 bar [kN]	Cylinder type ⁴⁾ flange for combination	ØD2	A2	A3	A4	A6	B1	B2	G	H1~
161-0824F-01	2-13	63	24	722D25202-FL ⁴⁾	15	15	30	200	65	45	45	2xG1/4	364
161-0840F-01	2-13	63	40	722D32252-FL ⁴⁾	15	15	30	200	75	60	45	2xG1/4	381
161-0863F-01	2-13	63	63	722D40252-FL ⁴⁾	15	15	30	200	85	70	45	2xG1/4	382
161-0824F-02	2-13	63	24	722D25202-FL ⁴⁾	15	15	30	200	65	45	45	2xG1/4	364
161-0840F-02	2-13	63	40	722D32252-FL ⁴⁾	15	15	30	200	75	60	45	2xG1/4	381
161-0863F-02	2-13	63	63	722D40252-FL ⁴⁾	15	15	30	200	85	70	45	2xG1/4	382
162-08068F-01	8-25	63	68	725D50151-FL ⁴⁾	28	25	50	210	Ø65	80	70	2xG1/4	405
162-08109F-01	8-25	63	109	725D63171-FL ⁴⁾	28	25	50	210	Ø97	100	70	2xG1/4	405
162-08175F-01	8-25	63	175	725D80151-FL ⁴⁾	28	25	50	210	Ø105	100	70	2xG3/8	440
162-08068F-02	8-25	63	68	725D50151-FL ⁴⁾	28	25	50	210	Ø65	80	70	2xG1/4	405
162-08109F-02	8-25	63	109	725D63171-FL ⁴⁾	28	25	50	210	Ø97	100	70	2xG1/4	405
162-08175F-02	8-25	63	175	725D80151-FL ⁴⁾	28	25	50	210	Ø105	100	70	2xG3/8	440


⁴⁾ If you require the cylinder without the mounting flange, omit the letters »FL« in the Order No. | An obligatory stripping unit can be implemented on request. Order example: 161Z-08 ...

Punching tools suitable for the punching units above

Punching unit without punching tools	Punching tools have to be ordered separately				
	Hole diameter range	Round punch			Shaped punch
Order No.	ØD	Punch kit Order No.	Punch Order No.	Die Order No.	Punch kit Order No.
161-.... F	2-13	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	501-Formloch-BL-ST
162-.... F	8-25	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	502-Formloch-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength. See also **punching tools**

Examples

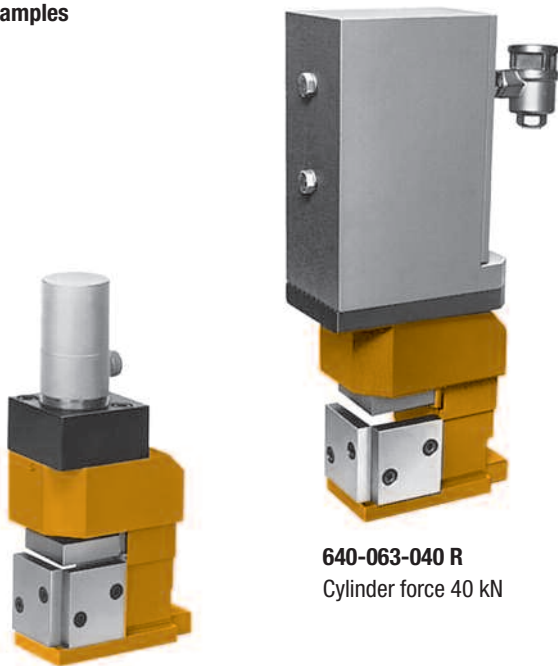

640-063-040 R
Cylinder force 40 kN

660-063-068 R
Cylinder force 68 kN

Driven by
pneumatic power cylinder, single-action,
hydraulic cylinder, double-action

Notching angle	90°
max. notch size	63x63 mm
material thickness with steel	0.3–3 mm*
with aluminium and plastics	0.3–5 mm*


*The cylinder force has to exceed the required cutting force.

In addition to the extremely successful press-operated 90° notch units with a notch size of 63 x 63 mm, the corresponding notch units with pneumatic and hydraulic operation are presented on this page. Limits on the use of these units are determined by the cutting force required.

The cutting force, which results from the effective cut length and the material thickness, may not exceed the maximum power of the cylinder.

The material support height is **85 mm**.

To combine these notch units with other pneumatic or hydraulic punching it is necessary to install a height compensation plate (see chart) to reach the material support height of 125 mm.

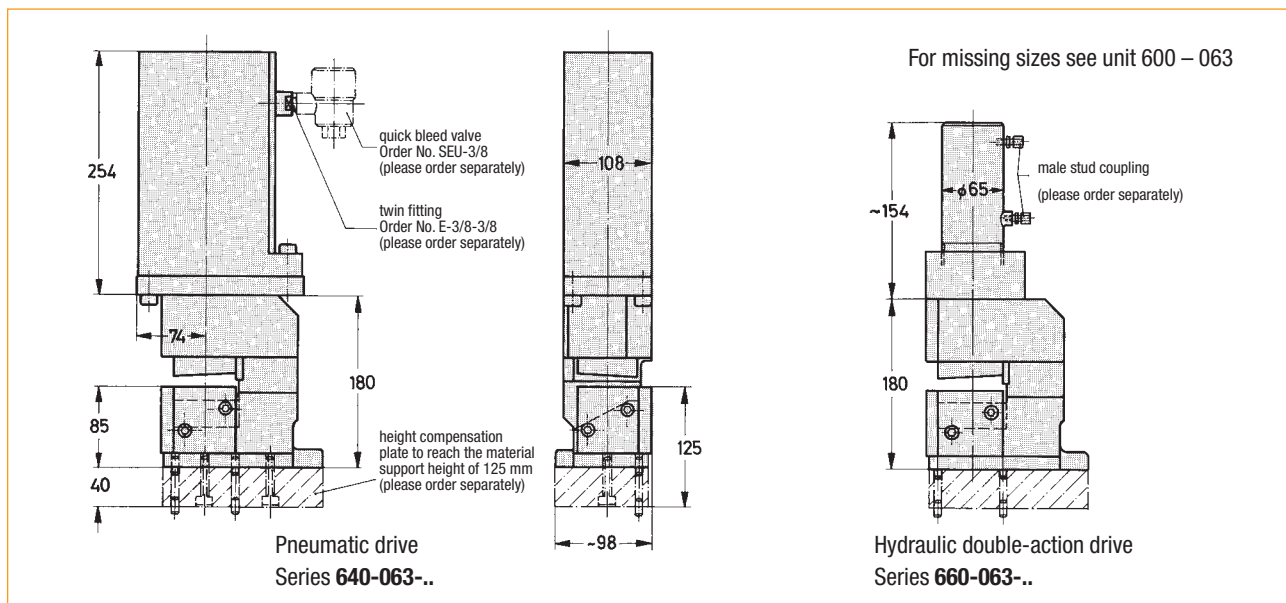

²⁾Combination of cylinder and flange

Notch units with cutting tools		Notch size	Max. force		Cylinder type	Weight ~	Gauging table, adjustable, please order separately Order No.	Height compensation plate, please order separately Order No.
pneumatic	hydraulic, double-action		with air supply pressure of 8 bar [kN]	with oil supply pressure of 350 bar [kN]				
Order No.	Order No.				Flange type Order No.	[kg]		
640-063-040 L	–	63x63	40	–	04-4010-05 ²⁾	23	800-063 S	815-063
640-063-040 R	–				F004-0018-0000			
–	660-063-068 L	63x63	–	68	725D50151-1	21		
–	660-063-068 R				F004-0019-0000			

Pneumatic and hydraulic rectangle notch units

Examples



661-100-109
Cylinder force 109 kN



641-050-040
Cylinder force 40 kN

Driven by
pneumatic power cylinder, single-action,
hydraulic cylinder, double-action

Notch shape	rectangle
for 641-050..., 661-050-...	50x50 mm
for 641-050..., 661-100-...	100x75 mm
material thickness	0.3–3 mm*


*The cylinder force has to exceed the required cutting force.

In addition to the extremely successful press-operated rectangle notch units with a notch size of 50 x 50 mm and 100 x 75 mm, the corresponding notch units with pneumatic and hydraulic operation are presented on this page.

Limits on the use of these units are determined by the cutting force required, see chart. The cutting force, which results from the effective cut length and the material thickness, may not exceed the maximum power of the cylinder.

The material support height is **85 mm**.


To combine these notch units with other pneumatic or hydraulic punching units it is necessary to install a height compensation plate (see chart) to reach the material support height of 125 mm. **For the dimensions of the basic structure, see drawing for units 601 – 050 or 601 – 100.**

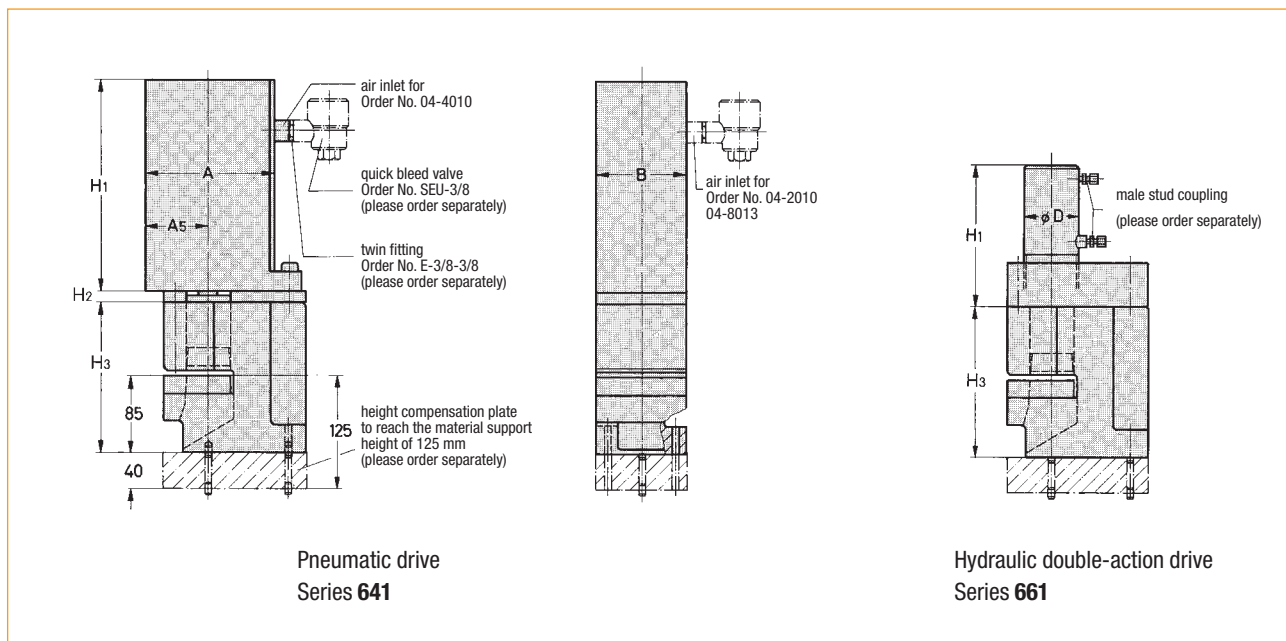

Notch units with cutting tools		Notch size width x depth	Max. force with air supply		Cylinder type ² Combination of cylinder and flange Order No.	Cylinder dimensions					Weight ~ [kg]	Height compensation plate, please order separately Order No.		
pneumatic Order No.	hydraulic, double-action Order No.		pressure of 8 bar [kN]	pressure of 350 bar [kN]		A	A ₅	B	ØD	H ₁ ~			H ₂ ~	H ₃ ~
641-050-040	–	50x50	40	–	04-4010-06 ²	144	72	108	–	234	20	165	32	815-050
641-100-040	–	100x75	40	–	04-4010	144	72	108	–	234	40	182	39	815-100
641-100-080	–	100x75	80	–	04-8013	154	77	122	–	405	40	182	63	815-100
–	661-050-068	50x50	–	68	725D50151-1	–	–	–	65	174	20	165	23	815-050
–	661-100-109	100x75	–	109	725D63171-1	–	–	–	97	189	40	182	37	815-100

Pneumatic and hydraulic 90° radii cutting units, R5-30mm

Examples

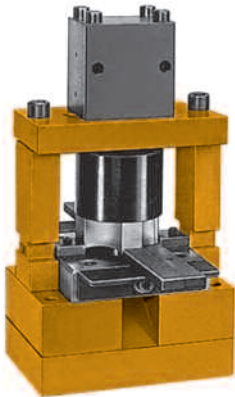

666-30-063
Cylinder force 63 kN



646-30-040
Cylinder force 40 kN

Driven by
pneumatic power cylinder, single-action
hydraulic cylinder, double-action

possible radii	R 5,10,15,20,25,30 mm
cutting angle α	90°
material thickness	
with steel	0.3–3 mm*
with aluminium and plastics	0.3–5 mm*

*The cylinder force has to exceed the required cutting force.

In addition to the press-operated radii cutting units, the corresponding hydraulic or pneumatic units are presented on this page.

With these units it is possible to notch 6 different 90° radii with only one tool. The radii are graduated in steps of 5 mm from R 5 mm up to R 30 mm.

Limits on the use of these units are determined by the cutting force required, see chart. The cutting force, which results from the effective cut length and the material strength, may not exceed the maximum power of the cylinder.

The material support height is **125 mm**.

Recommended accessories (please order separately)

For connecting the pneumatic radii cutting units to the compressed air system, we recommend the following accessories:

Other radii sizes are available on request.

Pneumatic drive
Series **646**

Examples

Hydraulic double-action drive
Series **666-30-063**

Section A-B

Radii cutting units with cutting tools		Possible 90° radii in steps of 5 mm	Max. force		Cylinder Type	H ~	Weight ~
pneumatic	hydraulic, double-action		with air supply pressure of 8 bar [kN]	with oil supply pressure of 350 bar [kN]			
Order No.	Order No.				Order No.		[kg]
646-30-040	–	R5, R10,	40	–	04-4010	504	58
646-30-080	–	R15, R20,	80	–	04-8013	675	79
–	666-30-063	R25, R30	–	63	722D50252-1	375	45

Pneumatic cut-off unit, 125 mm

Examples



649-125-040-N
Cylinder force 40 kN

**Driven by
pneumatic power cylinder, single-action**

max. cutting width	125 mm
material thickness	
with steel	0.3–3 mm*
with aluminium and plastics	0.3–5 mm*

* The cylinder force has to exceed the required cutting force.


In addition to the extremely successful press-operated cut-off units with a cutting width of 125 mm, the corresponding cut-off unit with pneumatic operation is presented on this page.

The cutting force, which results from the effective cut length and the material strength, may not exceed the maximum power of the cylinder.

The material support height is **85 mm**.

To combine this cut-off unit with other pneumatic punching units it is necessary to install a height compensation plate (see chart) to reach the material support height of 125 mm. **For the dimensions of the basic structure, see drawing for unit 610 – 125 N.**

The retainer has been removed in the illustration!

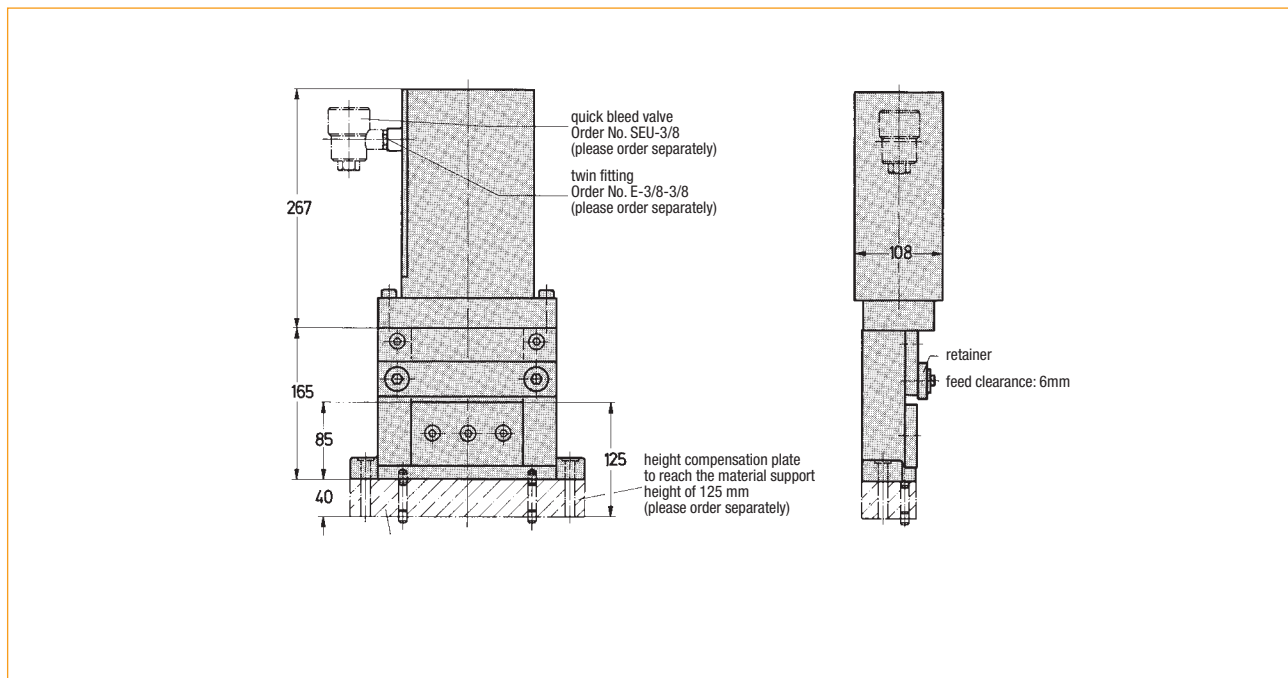

Cut-off unit with cutting tools with retainer pneumatic Order No.	Cutting width	Max. force with air supply pressure of 8 bar [kN]	Cylinder type ²⁾ Combination of cylinder and flange [kN]	Weight [kg]	Height com- pensation plate, please order separately Order No.
649-125-040-N	125	40	04-4010-03 ²⁾	32	815-125

Example



1421-0512L

Cylinder force:
Weight:

12kN at 8 bar
6.5 kg

For punching and notching of all punchable materials, such as steel, aluminium, plastics, wood, cardboard, etc. Tools can be changed quickly. The size of the maximum hole diameter or the maximum notch depends on the material thickness and the material strength. It has to be calculated on an individual basis. Recommended material thickness ranging from 1–3 mm, (see also the force / stroke chart below). Economical expansion possibilities are provided by conversion kits, see below.

Tools suitable for the mobile units above (please order separately)

Notch unit:	1421-0512K
Punch kit:	521-Vierkant-21-BL-ST
Radius cutting unit:	1421-0512R
Punch kit:	521-Radius-BL-ST
Punching unit:	1421-0512L
Punch kit:	521-Ø-BL-ST
Punch:	321-Ø
Die:	421-Ø-BL-ST
Shaped hole:	521-Formloch-BL-ST

Insert in Order No.: Ø = hole Ø or »Formloch« (i.e. shaped hole; »Vierkant« = square),
BL = material thickness, ST = material and strength.



Conversion module for punching unit 1421-05-LU
without punch kit




Conversion module for notch unit 1421-05-KU
without punch kit.
Adjustable limit stops are included in the delivery (see illustration below)




Conversion module for radius cutting unit 1421-05-RU
without punch kit.
Adjustable limit stops are included in the delivery (see illustration below)



Adjustable limit stops

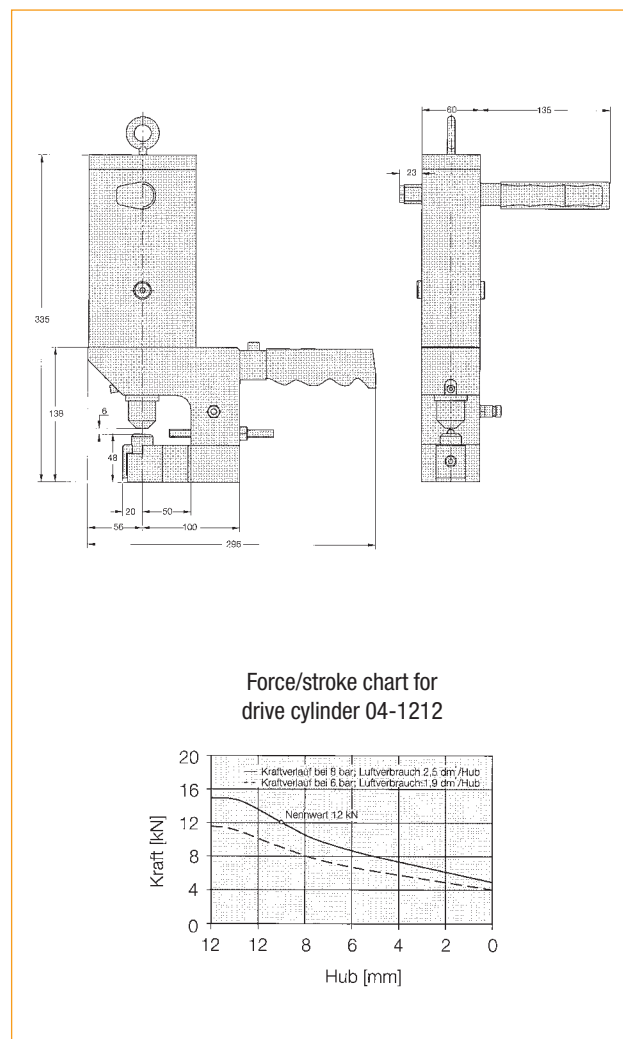


Examples



101-RLA-50
Press-operated
Throat depth range A = 50 mm



141-RLA-50
Pneumatic single-action unit
Throat depth range A = 50 mm
Cylinder force 80 kN
with air supply pressure of 8 bar

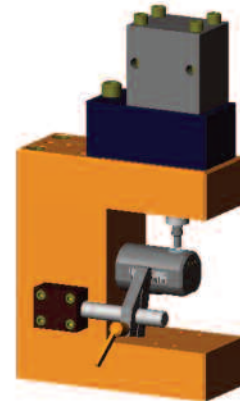

161-RLA-50
Hydraulic double-action unit
Throat depth range A = 50 mm
Cylinder force 68 kN
with oil supply pressure of 350 bar

Round and shaped cut

Hole diameter	D	2 – 13 mm
External pipe diameter	da	40 – 60 mm
Pipe thickness	s	1 – 5 mm*
Material with $R_{m \max} < 630 \text{ N/mm}^2$		




* The cylinder force has to exceed the required cutting force.

The pipe punching unit has a modular construction. It is possible to equip a press-operated unit with a hydraulic or a pneumatic drive at a later date.

It is possible to punch a large variety of pipe dimensions and shapes. The punch kit and the mandrel can be exchanged easily which enables various pipe shapes and hole diameters to be punched with a single unit. The position of the hole can be set by means of an adjustable limit stop using a scale of 0-50 mm (centre of hole to pipe end).

To ensure correct dimensioning of the mandrel we need to know the DIN designation of the pipe. For welded pipes we assume that the welding is in the flat area of the mandrel. If there are any burrs due to sawing these have to be removed prior to punching. **Additional pipe dimensions and accessories are available on request.**

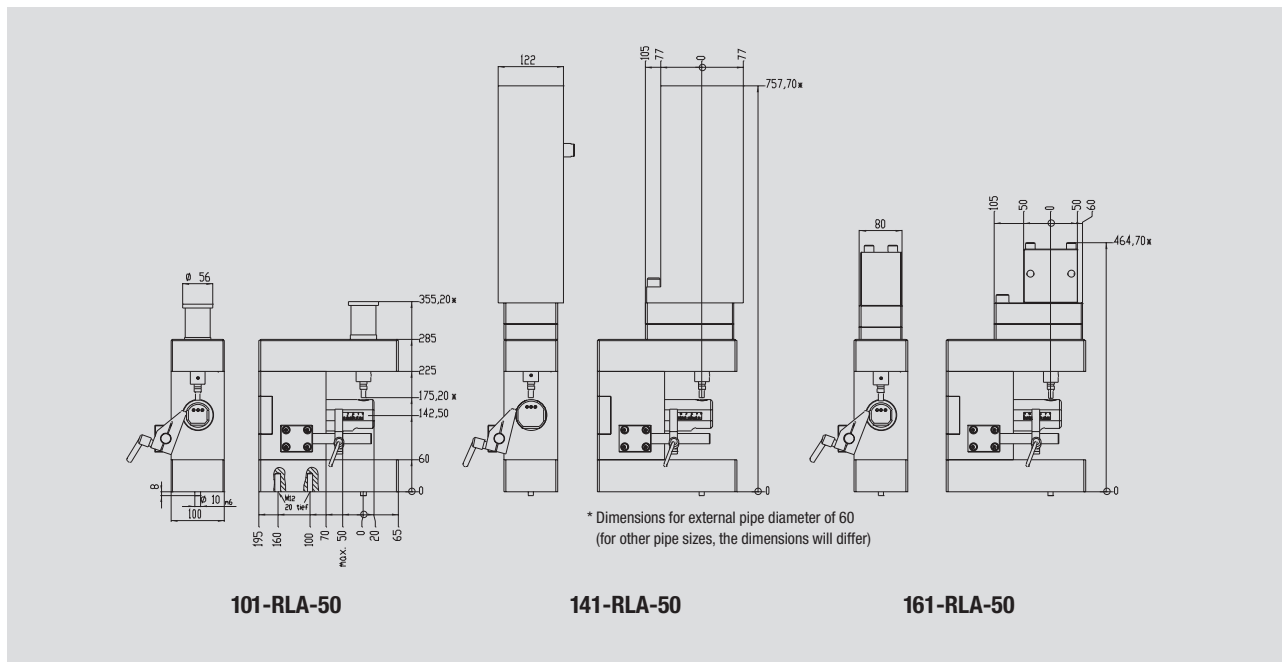


Order No.	Punching unit without tools and die mandrel		Hole diameter D [mm]	External pipe diameter da [mm]	Pipe thickness s [mm]	Throat depth range A [mm]	Max. force		Cylinder type see pages 69+73	Weight [kg]
	press-operated pneumatic single-action	hydraulic double-action					with air supply pressure of 8 bar [kN]	with oil supply pressure of 350 bar [kN]		
101-RLA-50	–	–	–	–	1–5	–	–	–	–	44
–	141-RLA-50	–	2–13	40–60	1–3	50	80	–	04-8013	90
–	–	161-RLA-50	–	–	1–5	–	–	68	722D50252-1	55

Punch kit Order No.	Punching tools have to be ordered separately			Die mandrel has to be ordered separately	
	Round hole Punch Order No.	Die Order No.	Shaped hole Punch kit Order No.	Round pipe Order No.	Rectangular pipe Order No.
551-ØD-Øda-DIN x s-ST	351-ØD	451-ØD-Øda-DIN x s-ST	551-Formloch-Øda-DIN x s-ST	461-Øda-DIN x s	471-axb-DIN x s

Insert in order no: **ØD** = diameter or »Formloch« (i.e. shaped hole), **Øda** = external pipe diameter, **DIN** = industrial standard reference for the pipe (e.g. DIN 2393)
s = pipe thickness, **ST** = material and strength, **a** = height of pipe, **b** = width of pipe

Accessories:


Punching on flap

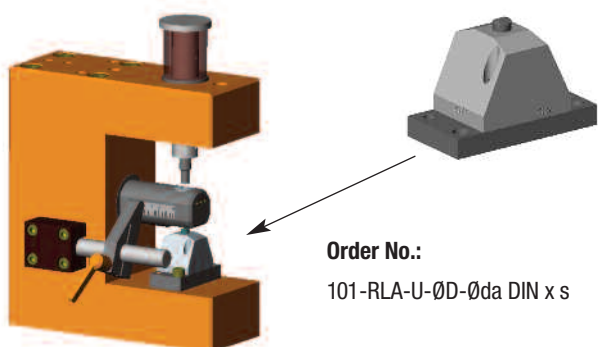

Example:

101-RLA-50 + 101-RLA-U-Ø9-Ø60 x DIN 2393 x 3

Punching without die

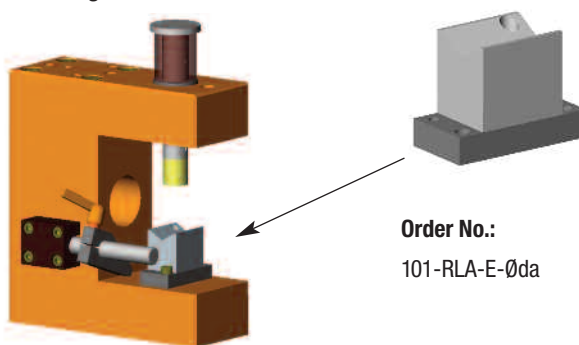

Example:

101-RLA-50 + 101-RLA-E-Ø60 (the die mandrel has to be removed)

Werkzeugschrank

45

44

32

27

36

85

88

92

80

Teileeinlauf


97

79

105

Aufnahmestift

Beri-Bezeichnung:

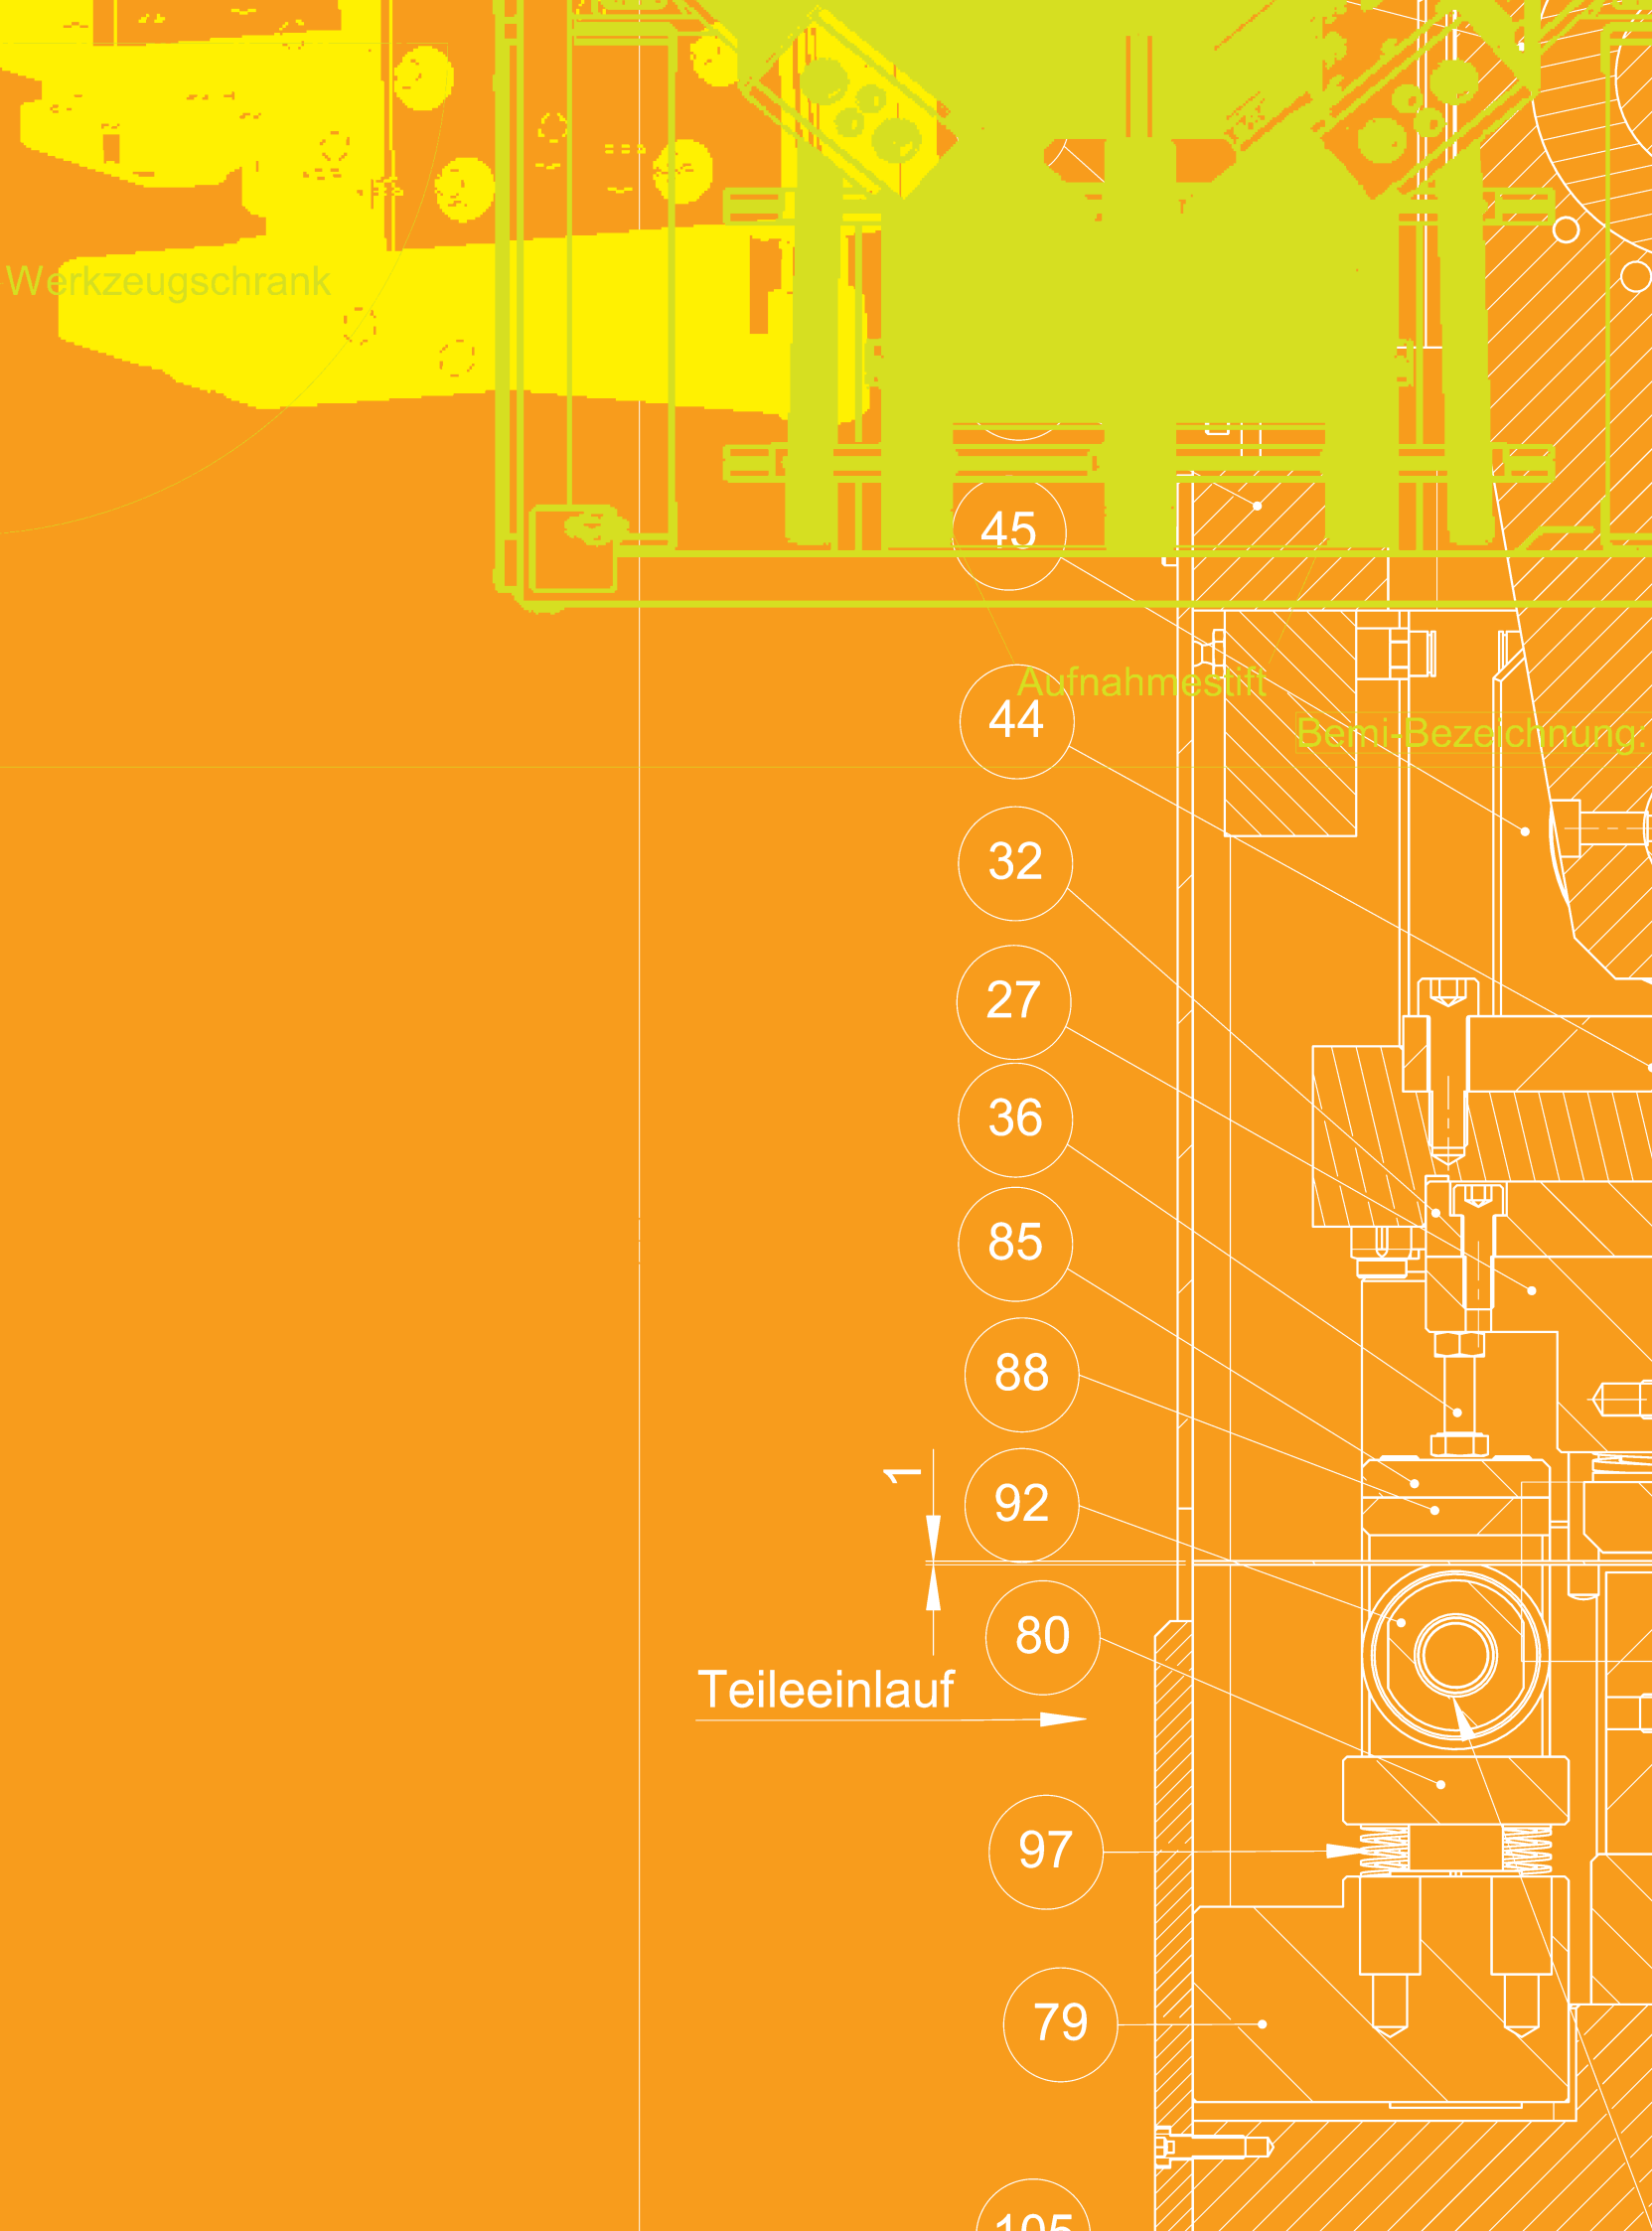




SOLUTIONS

INTELLIGENT PUNCHING

Punches • Dies • Reduction Bushes • Strippers //








5

Punches • Dies • Reduction Bushes • Strippers //



INTELLIGENT PUNCHING SOLUTIONS

Round hole punching tools ● technical illustration of punches and dies

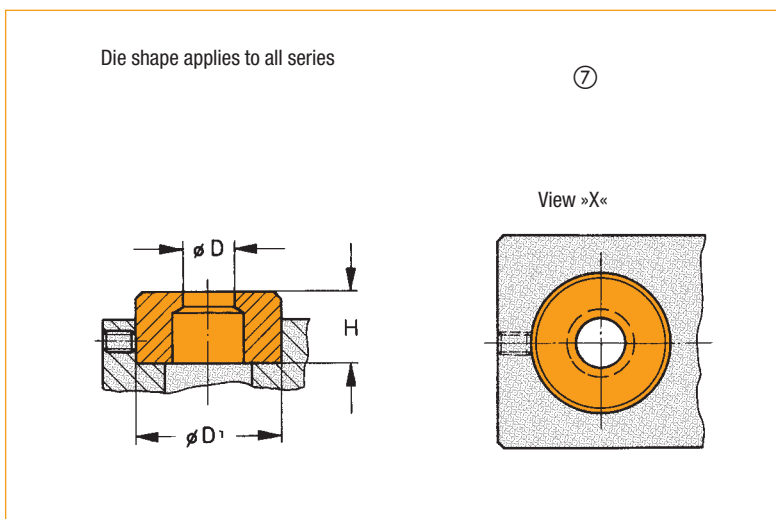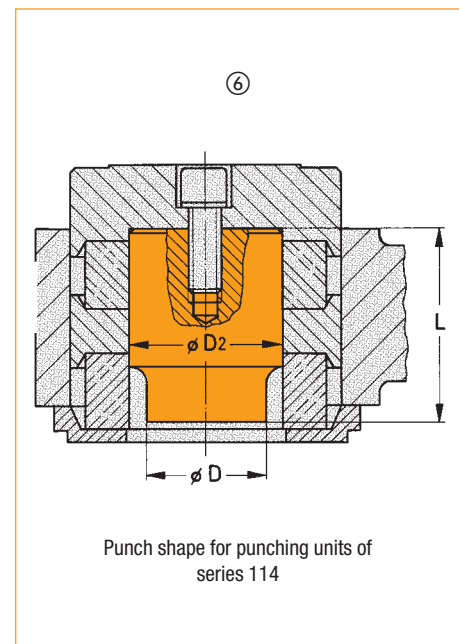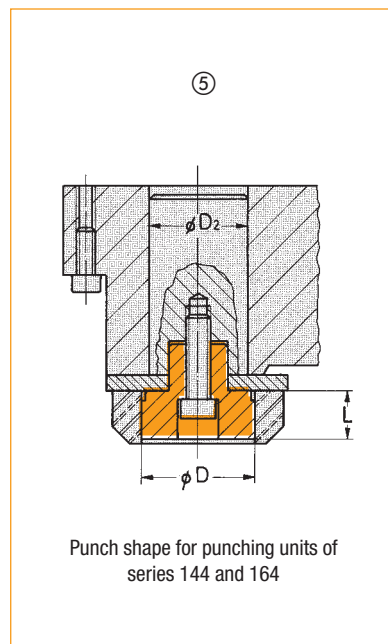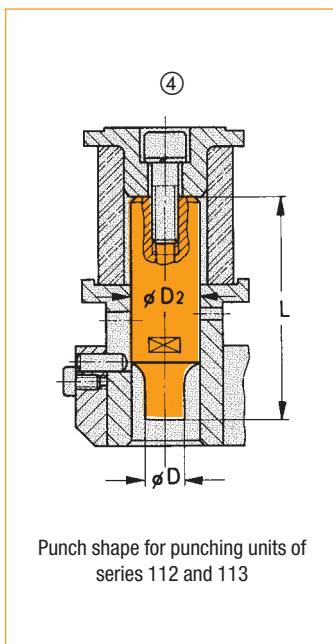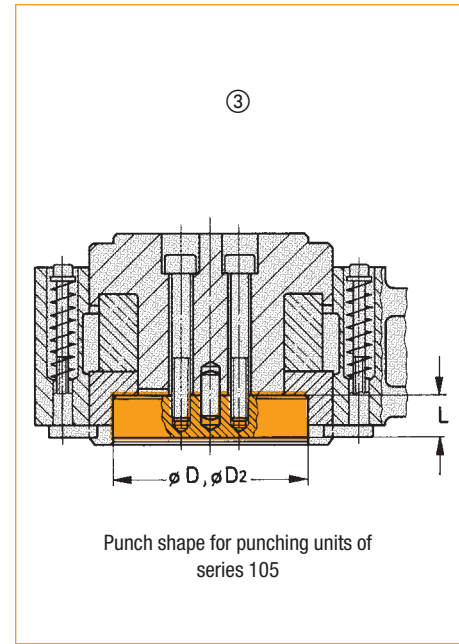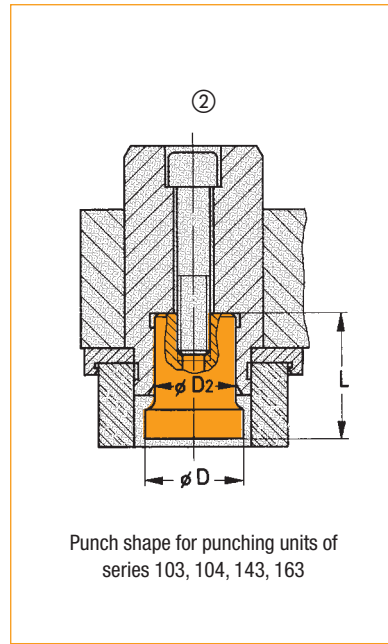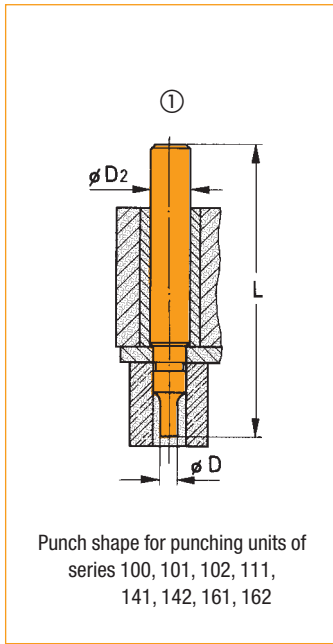

Round hole punching tools


The required die clearance is preset in the factory in accordance with the desired hole size, while considering the specified material thickness and material strength.

By using reduction bushes and sockets holes can be punched with a smaller hole diameter than specified for the particular series for some of the punching units.

Punching units for round cuts can easily and quickly be converted to shaped hole punching units, using a shaped cut conversion kit.

Order example

Round hole punching tool for punching unit order no. 102-200F

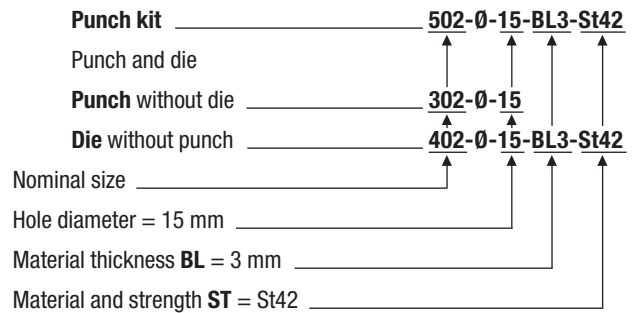








(for nonferrous material, e.g.: Al F22)

Round hole punching tools ● punch kits, punches, dies, sizes on stock

for punching units of series	Sizes on stock			Available hole diameters		Dimensions				Corresponding drawings page before
	Punch kit Order No.	Punch Order No.	Die Order No.	Range ØD	Graduation [mm]	Drawings on the left				
						ØD ₂	L	ØD ₁	H	
100-	500-Ø-BL-ST	300-Ø	400-Ø-BL-ST	2-7	0.5	8	105	15	16	① + ⑦
101- 111- 141- 161-	501-Ø-BL-ST	301-Ø	401-Ø-BL-ST	2-13	0.5	15	105	22	20	
102- 142- 162-	502-Ø-BL-ST	302-Ø	402-Ø-BL-ST	8-25	1	28	105	42	20	
103- 143- 163-	503-Ø-BL-ST	303-Ø	403-Ø-BL-ST	25-40 special size 20-25 available	1	30	45	63	25	② + ⑦
104-	504-Ø-BL-ST	304-Ø	404-Ø-BL-ST	40-63	only hole diameter 40, 42, 45, 50 55, 60, 63	50	45	90	25	
105-	505-Ø-BL-ST	305-Ø	405-Ø-BL-ST	63-100	all sizes available as special size	63 bis 100	22	145	25	③ + ⑦
112-	512-Ø-BL-ST	312-Ø	402-Ø-BL-ST	8-22	1	25	80	42	20	④ + ⑦
113-	513-Ø-BL-ST	313-Ø	403-Ø-BL-ST	22-38	1	40	80	63	25	
114-	514-Ø-BL-ST	314-Ø	404-Ø-BL-ST	35-63	all sizes available as special size	63	80	90	25	⑥ + ⑦
144- 164-	524-Ø-BL-ST	324-Ø	404-Ø-BL-ST	40-63		50	24	90	25	⑤ + ⑦

Special sizes are available for each size within the diameter range

Shaped hole punching tools  punch kits, sizes on stock and special sizes

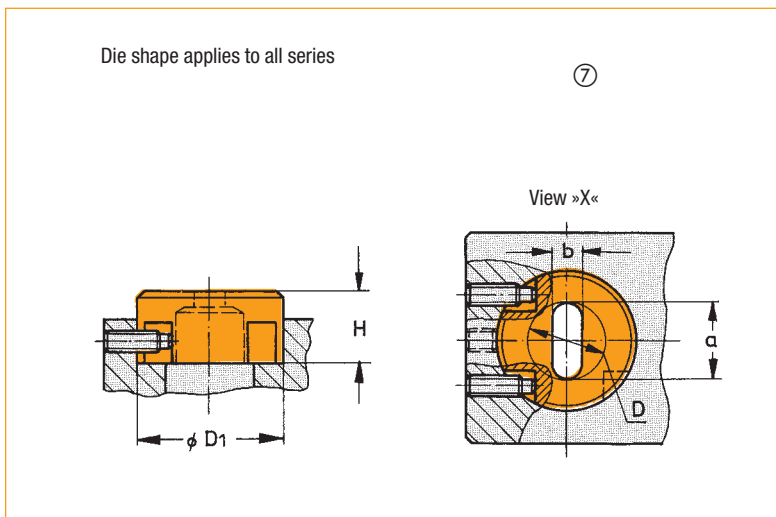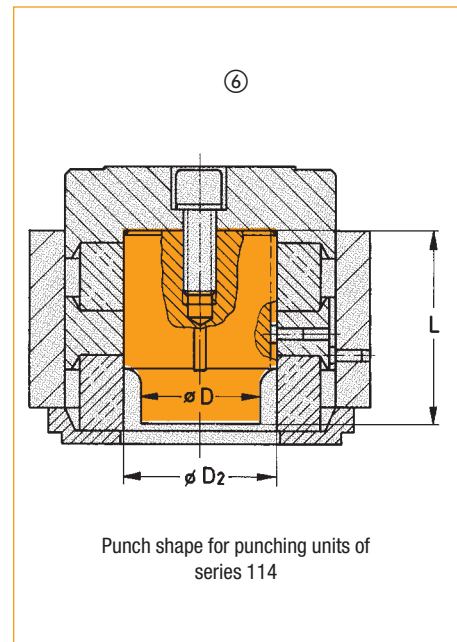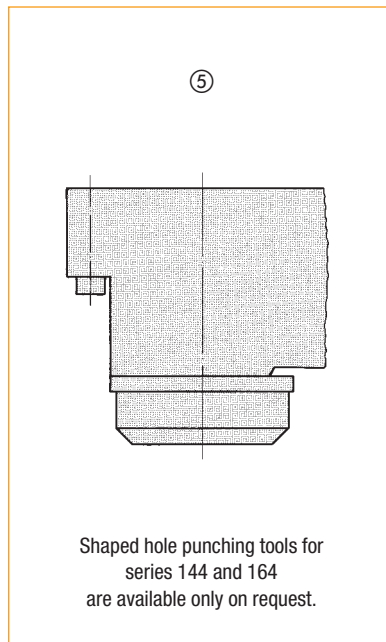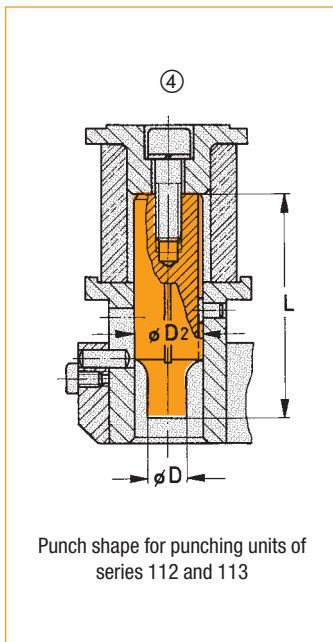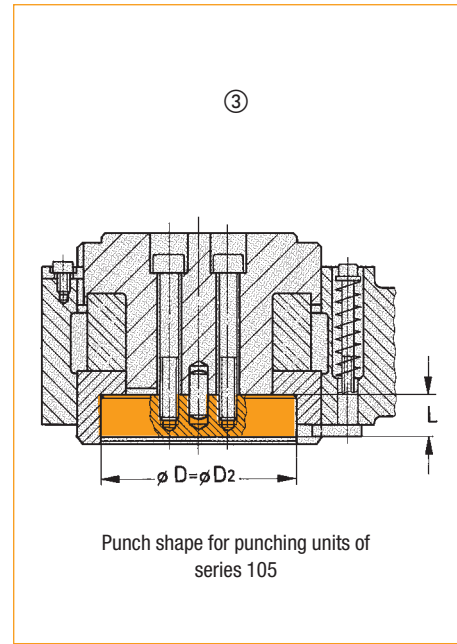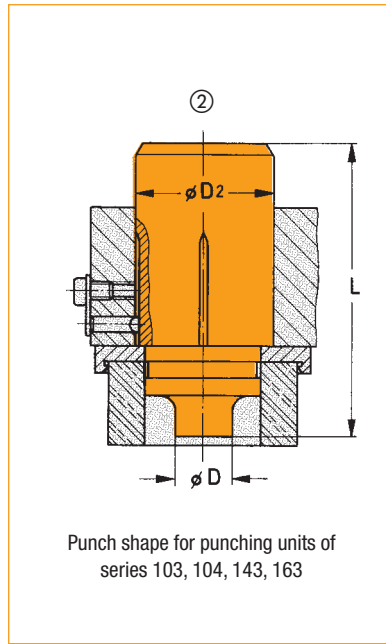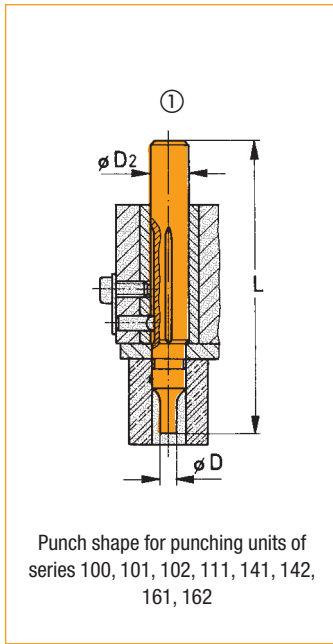

Shaped hole punching tools

The max. outside profile of a shaped cut may not exceed the max. possible hole diameter.


The required die clearance for the die is preset in accordance with the desired hole size, while considering the specified material thickness and material strength.

Shaped hole punching tools can be used »lengthways« or »crosswise« to the punching unit.

Order example

Shaped hole punching tool »DSW-Form« (means DAF shape, with D = diameter and AF = width across flat) as special size for punching unit order no. 103-200 F

Punch kit, punch and die **503 - DSW-Form - Ø30 x SW20 - BL4 - St60**

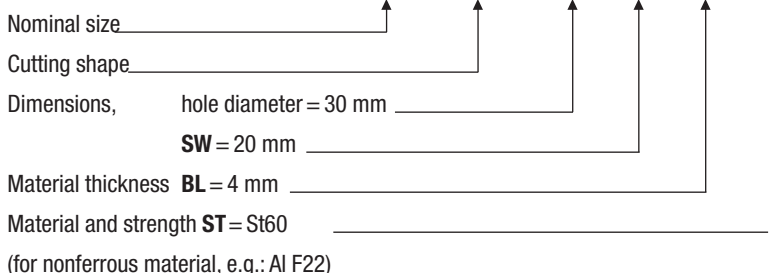

Shaped hole punching tools punch kits, sizes on stock and special sizes

for punching units of series	Sizes on stock	Special sizes *	Range	Dimensions Drawings on the left					Corresponding drawings page before	Shaped cut conversion kits only for punching units which have been ordered without shaped cut conversion kit
	Order No.	Order No.		ØD	ØD ₂	L	ØD ₁	H		
100-	—	—	2-7	—	—	—	—	—	—	
101- 111- 141- 161-	501-Langloch-4.5x10-BL-ST 501-Langloch-5.5x12-BL-ST 501-Langloch-7x12-BL-ST	501-Langloch-a x b-BL-ST 501-DSW-Form-DxSW-BL-ST 501-Quadrat-a x a-BL-ST 501-Rechteck-a x b-BL-ST	2-13	15	105	22	20	① + ⑦	805-101 805-111 805-141 805-161	
102- 142- 162-	502-Langloch-5,5x20-BL-ST 502-Langloch-7x20-BL-ST 502-Langloch-9x22-BL-ST 502-Langloch-11x25-BL-ST 502-Langloch-13x25-BL-ST	502-Langloch-a x b-BL-ST 502-DSW-Form-DxSW-BL-ST 502-Quadrat-a x a-BL-ST 502-Rechteck-a x b-BL-ST	8-25	28	105	42	20	① + ⑦	805-102 805-142 805-162	
103- 143- 163-	—	503-Langloch-a x b-BL-ST 503-DSW-Form-DxSW-BL-ST 503-Quadrat-a x a-BL-ST 503-Rechteck-a x b-BL-ST	20-40	50	105	63	25	② + ⑦	805-103 805-143 805-163	
104-	—	504-Langloch-a x b-BL-ST 504-DSW-Form-DxSW-BL-ST 504-Quadrat-a x a-BL-ST 504-Rechteck-a x b-BL-ST	40-63	75	105	90	25	② + ⑦	805-104	
105-	—	505-Langloch-a x b-BL-ST 505-DSW-Form-DxSW-BL-ST 505-Quadrat-a x a-BL-ST 505-Rechteck-a x b-BL-ST	63-100	63 to 100	22	145	25	③ + ⑦	805-105	
112-	512-Langloch-7x20-BL-ST 512-Langloch-9x22-BL-ST 512-Langloch-11x22-BL-ST 512-Langloch-13x22-BL-ST	512-Langloch-a x b-BL-ST 512-DSW-Form-DxSW-BL-ST 512-Quadrat-a x a-BL-ST 512-Rechteck-a x b-BL-ST	8-22	25	80	42	20	④ + ⑦	805-112	
113-	—	513-Langloch-a x b-BL-ST 513-DSW-Form-DxSW-BL-ST 513-Quadrat-a x a-BL-ST 513-Rechteck-a x b-BL-ST	22-38	40	80	63	25	④ + ⑦	805-113	
114-	—	514-Langloch-a x b-BL-ST 514-DSW-Form-DxSW-BL-ST 514-Quadrat-a x a-BL-ST 514-Rechteck-a x b-BL-ST	35-63	63	80	90	25	⑥ + ⑦	805-114	

* Special sizes / shapes: Langloch = oblong hole, DSW-Form = DSW shape, Quadrat = square, Rechteck = rectangle



◀ Reduction bush

◀ Reduction socket

Reduction bushes and sockets

only for round hole punching tools

When using reduction bushes and sockets with the punching units of the series 101 to 163, the punch and die of the next smaller punching unit may be used.

This extends the application range of the listed punching units by the reduced diameter given in the table below.


Due to the possibility of using the next smaller punching tool size, additional tool units are no longer required and, thereby, costs are reduced.

for punching units of series	Punch diameter range without reduction parts		Punch diameter range with reduction parts		Reduction parts						Required cutting tools	
	standard Ø	Fig.	reduced Ø	Fig.	Reduction bush complete with workpiece stripper			Reduction socket			Punch	Die
					Order No.	ØD	Ød	Order No.	ØD	Ød	Order No.	Order No.
101 111 141 161	2-13		2-7		850-15x08	15	8	860-22x15	22	15	300-Ø...	400-Ø-BL-ST

for punching units of series	Punch diameter range without reduction parts		Punch diameter range with reduction parts		Reduction parts						Required cutting tools	
	standard Ø	Fig.	reduced Ø	Fig.	Reduction bush complete with workpiece stripper			Reduction socket			Punch	Die
					Order No.	ØD	Ød	Order No.	ØD	Ød	Order No.	Order No.
102 142 162	8-25		from 2-8 from 8-13 ¹⁾		850-28x15	28	15	860-42x15	42	15	301-Ø...	400-Ø-BL-ST From hole diameters of 8 mm onwards, use die 402-Ø-BL-ST.

for punching units of series	Punch diameter range without reduction parts		Punch diameter range with reduction parts		Reduction parts						Required cutting tools	
	standard Ø	Fig.	reduced Ø	Fig.	Reduction bush complete with workpiece stripper			Reduction socket			Punch	Die
					Order No.	ØD	Ød	Order No.	ØD	Ød	Order No.	Order No.
103 143 163	25-40		8-25		850-50x28	50	28	860-63x42	63	42	302-Ø...	402-Ø-BL-ST

Insert in order no.: Ø = hole Ø or »Formloch« (i.e. shaped hole), BL = material thickness, ST = material and strength.

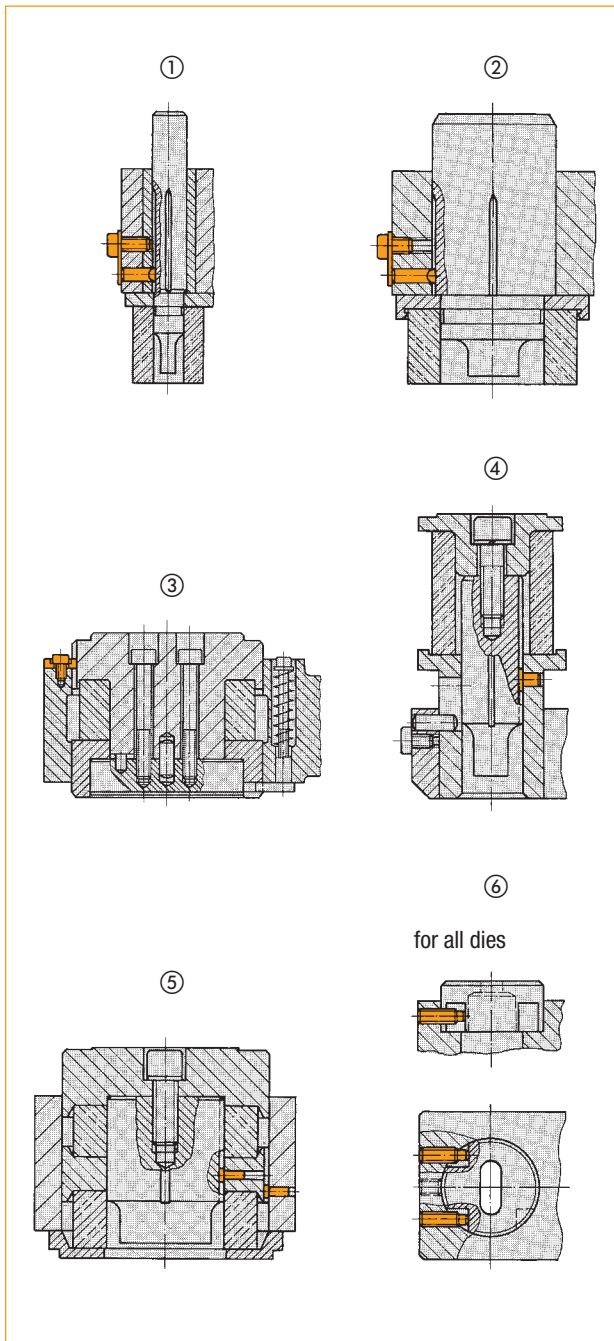


Shaped cut conversion kits

All punching units for round cuts (except for series 100) can easily and quickly be converted to shaped hole punching units, using a shaped cut conversion kit.

A shaped cut torsion lock is included in the standard delivery of all punching units (except for series 100).

for punching unit series	Corresponding figures	Order No.
101	① + ⑥	805-101
102	① + ⑥	805-102
103	② + ⑥	805-103
104	② + ⑥	805-104
105	③ + ⑥	805-105
111	① + ⑥	805-111
112	④ + ⑥	805-112
113	④ + ⑥	805-113
114	⑤ + ⑥	805-114
141	① + ⑥	805-141
142	① + ⑥	805-142
143	② + ⑥	805-143
161	① + ⑥	805-161
162	① + ⑥	805-162
163	② + ⑥	805-163

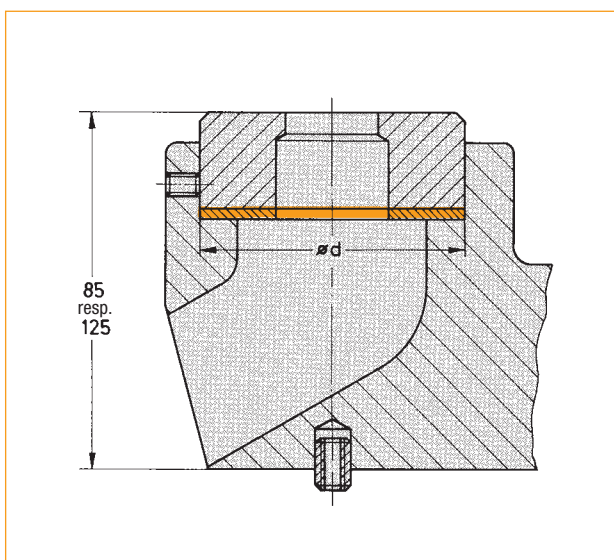


Compensating washers

Compensating washers are required to bring reworked dies to the working or material support height of 85 or 125 mm.


This height compensation is particularly important when several punching units are to be combined to a series punch installation. In this case, uniform working and material support height is essential.

Ød	for dies to be used for punching units of series		1 kit = 4 pieces thickness	Order No.	
	Series				
15	400	100	mm	806-15	
22	401	101, 111, 141, 161		0.1	806-22
		102, 112, 142, 162		0.3	
42	402, 412	103, 113, 143, 163		0.5	806-42
63	403, 413	104, 114		1.0	806-63
90	404, 414			806-90	


Polyurethane workpiece stripper




Shape A



Shape B





Shape C



Shape D

Note When punching in thin metal sheets, the outside diameter of the polyurethane stripper lying on the metal sheet should be skewed and adapted to the diameter of the die. This prevents undesirable deformation of the metal sheet caused by the stripper.



for punching units of series														Stripping		Dimensions					Order No.
100	101	102	103	104	105	112	113	114	141	142	143	144	Shape	force	a	b	Ød	ØD	H		
														A	medium	–	–	6,5	18	30	801-018x30
														A	small	–	–	12	28	27	801-028x27
														A	medium	–	–	12	28	30	801-028x30
														A	small	–	–	25	40	27	801-040x27
														A	medium	–	–	25	40	30	801-040x30
														A	large	–	–	25	50	30	801-050x30
														A	small	–	–	41	60	28	801-060x28
														A	medium	–	–	41	60	30	801-060x30
														A	large	–	–	41	70	30	801-070x30
														A	large	–	–	64	95	30	801-095x30 ²⁾
														A	large	–	–	on request	100	27	801-100x27
														A	large	–	–	64	100	30	801-100x30
														A	large	–	–	76	112	40	801-112x40
														C	large	–	17	6,5	25	31	802-025x31 ¹⁾
														B	large	28	–	12	–	31	802-028x31 ¹⁾
														B	large	50	–	29	–	50	802-050x50
														B	large	70	–	45	–	50	802-070x50
* Polyurethane strippers, shape D (full material), are provided for special applications and are supplied in the requested length. Add the requested length »H« to the order no. The hole (Ød) is provided by the customer.														D	–	–	–	–	28	*	803-028xH*
														D	–	–	–	–	50	*	803-050xH*
														D	–	–	–	–	70	*	803-070xH*
														D	–	–	–	–	100	*	803-100xH*

¹⁾ Reinforced version for higher retraction forces when punching thick materials

²⁾ 1 kit = 2 pieces



1.02

HGL-1/4

010

PUN-8x

591,50

509

22,50

40
30

98

30

426

548

525

5,25

esserhöhe = 243

10,5

11

51

32

28

88

94

19

83

80

9

97

98

91

92

9

2

1

OWA

INTELLIGENT PUNCHING SOLUTIONS

System extensions //


6

System extensions //


- // frames
- // limit stop systems
- // hydraulic units
- // hydraulic cylinders
- // pneumatic power cylinders
- // hydropneumatic power cylinders
- // cylinder position monitoring device
- // foot switches
- // minimum quantity lubrication systems

Machine control system

- // safety PLCs
- // quality assurance
- // power monitoring
- // visual inspection
- // insertion monitoring
- // measuring equipment

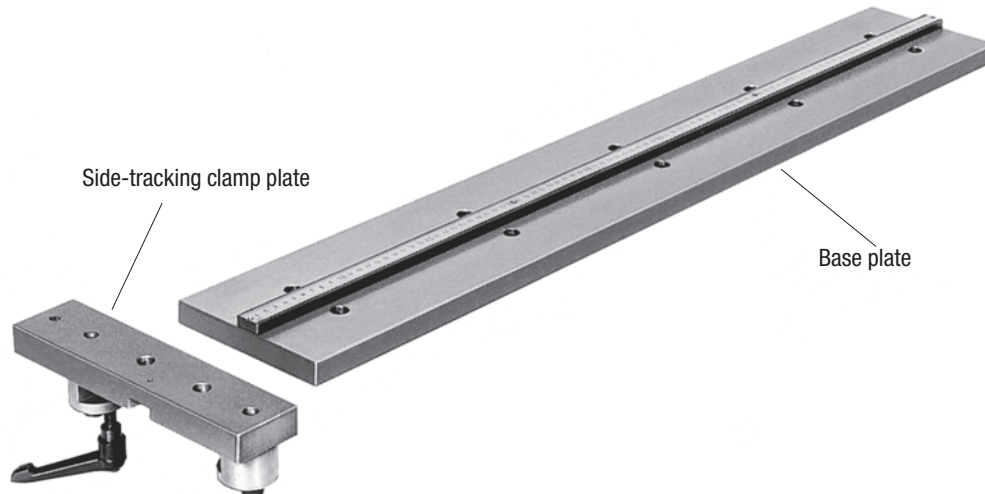

Application example

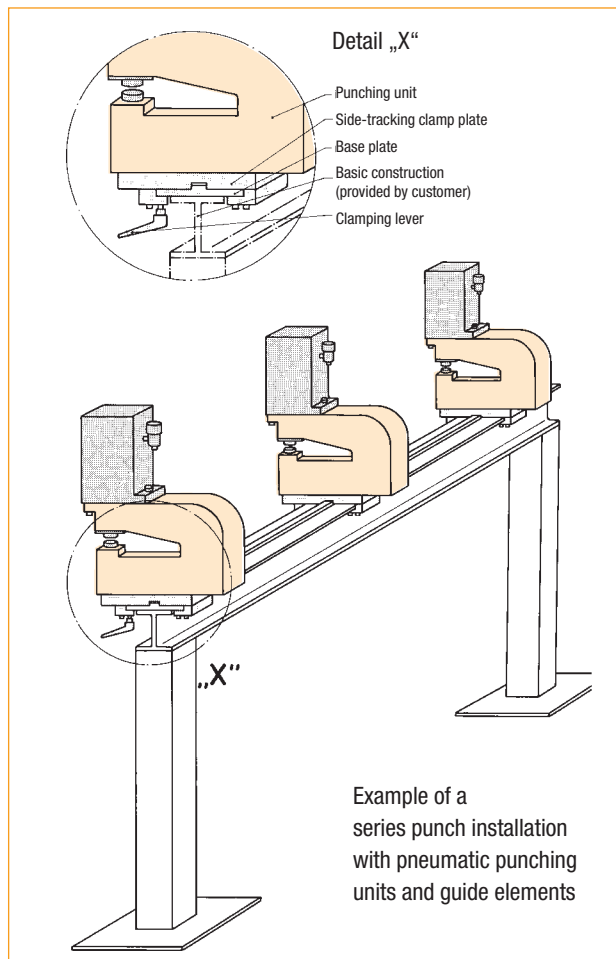

These guide elements provide a simple and cost effective side-tracking solution for all pneumatic and hydraulic punching units used in series punch installations.

The side-tracking clamp plates are used to mount the punching units and enable changing the distance between the punching units. The side-tracking clamp plates are mounted on the base plate.

Each side-tracking clamp plate has a guide groove at the bottom which fits onto the guide rail of the base plate and guides the side-tracking clamp plate and therefore the punching unit.


The quick-action clamping lever enables the side-tracking clamp plate to be secured in the desired position on the base plate.

The base plate has threaded holes on the bottom to facilitate mounting on a basic construction. The customer provides the basic construction. On request, the base plates are also available with a fixed scale on top of the rail.

Further combinations of guide elements with pneumatic and hydraulic tool units for notching flat materials and profiles in steel, aluminium and plastics are available on request.


Side-tracking clamp plates		
Order No.	Width [mm]	Weight ~ [kg]
818-060x150	60	3.5
818-100x150	100	5

Base plates			
Order No. without scale	Order No. with scale	Please add the requested total length to the order no. [mm]	Weight ~ [kg]
820-150x...	820-150x...M	1000	24
		1500	35
		2000	47
		2500	59
		3000	71

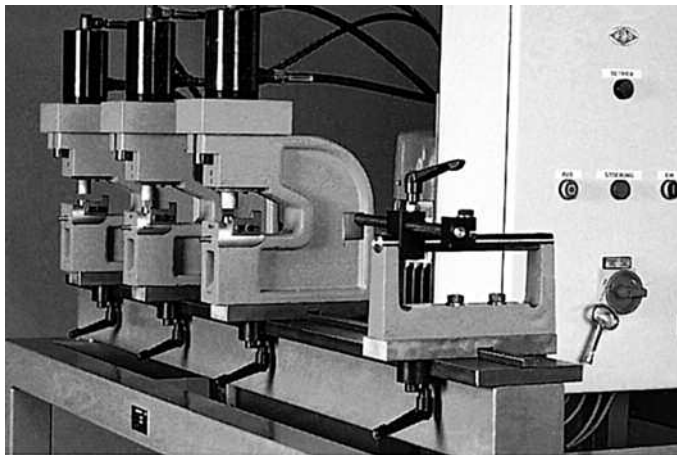


Guide elements in a series punch installation with hydraulic double-action operation for punching a punch layout in steel strips.


Side-tracking clamp plate



Side view




Side view



Order No. **818-060x150**

Order No. **818-100x150**

Base plate

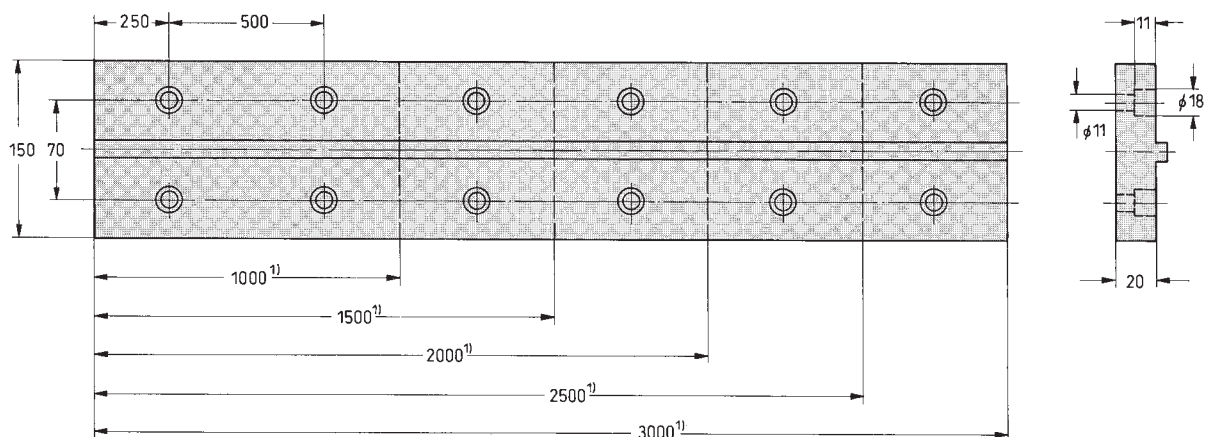


Base plate

Order No. **820-150 x total length**


Base plate with scale

Order No. **820-150 x total length-M**


¹⁾Total length which can be supplied.

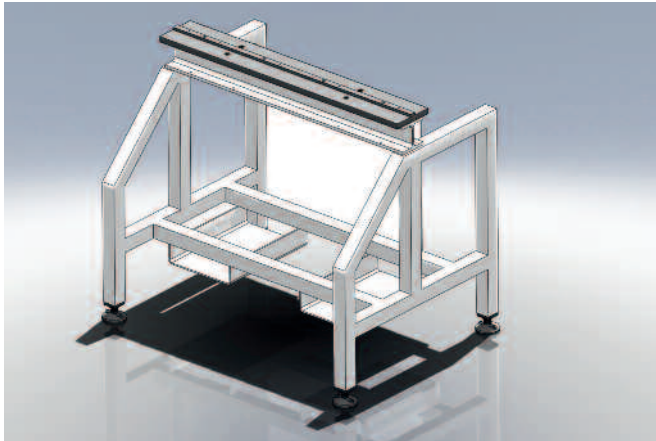


frame
without waste collection
order no. 820-X000-001

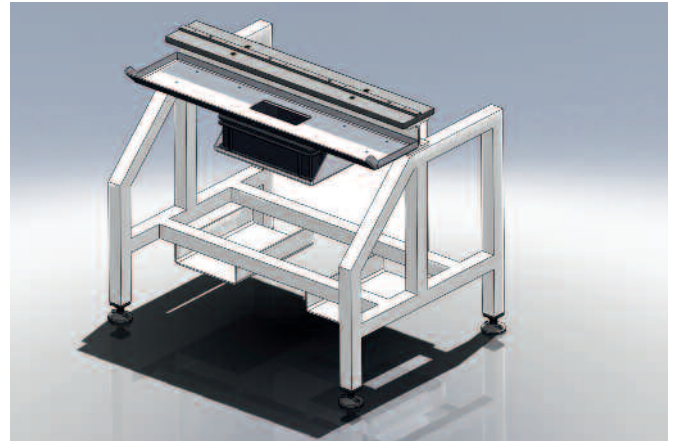


frame
with waste collection
order no. 820-X000-002

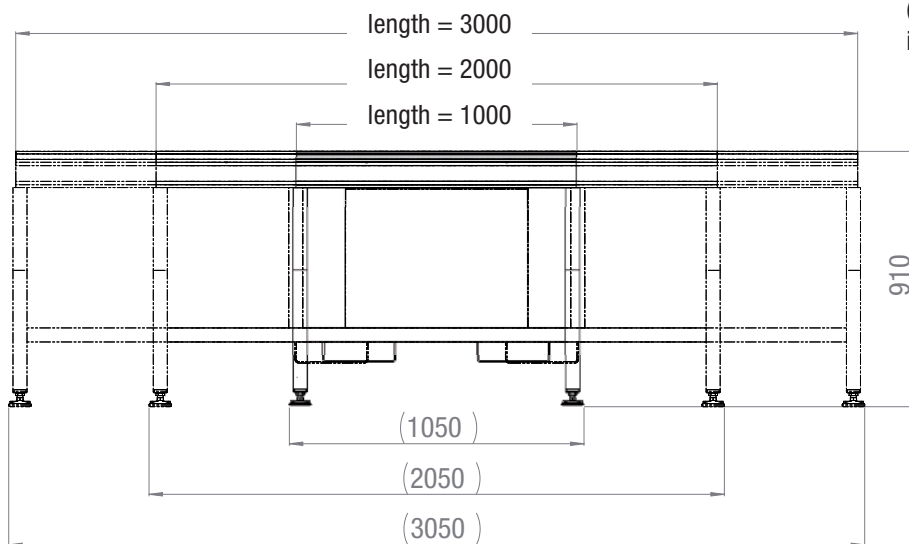

base plate
(order no. 820-150x...)
is included in the scope of supply

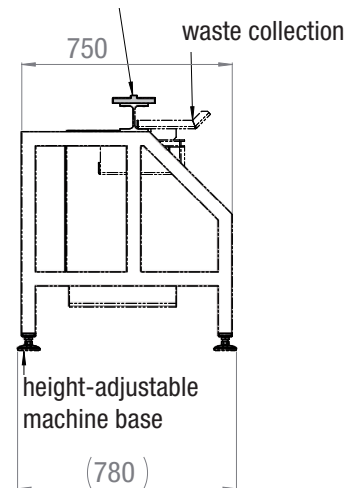

RAL no. 7035, light grey

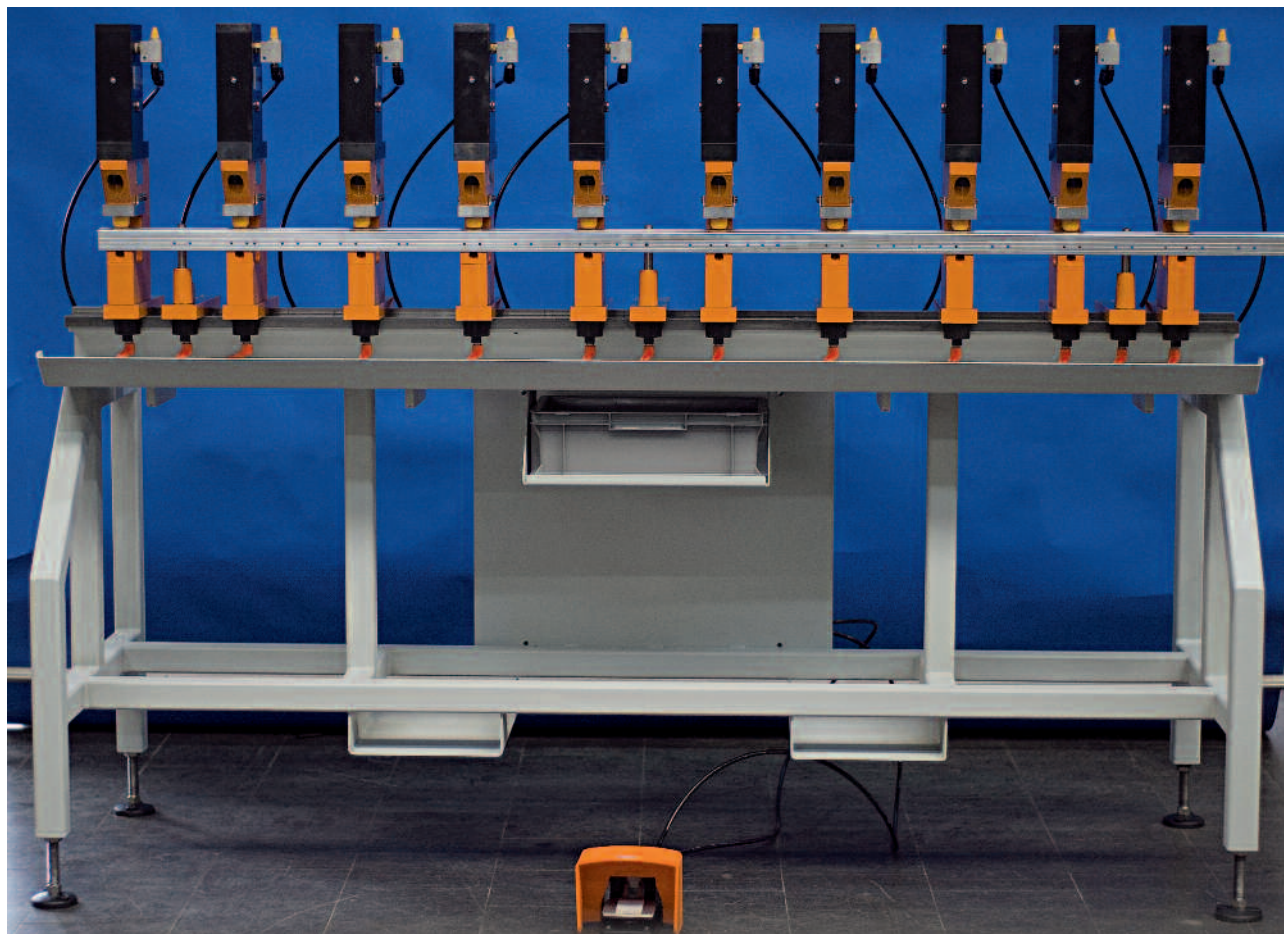


Unit for punching aluminium profiles



Standard frame without waste collection order no.	Standard frame with waste collection order no.	Waste collection order no.	Length:	Weight [kg] without / with waste collection
820-1000-001	820-1000-002	820-1000-101	1000	102 115
820-2000-001	820-2000-002	820-2000-101	2000	146 166
820-3000-001	820-3000-002	820-3000-101	3000	182 208


Universal limit stop and workpiece support

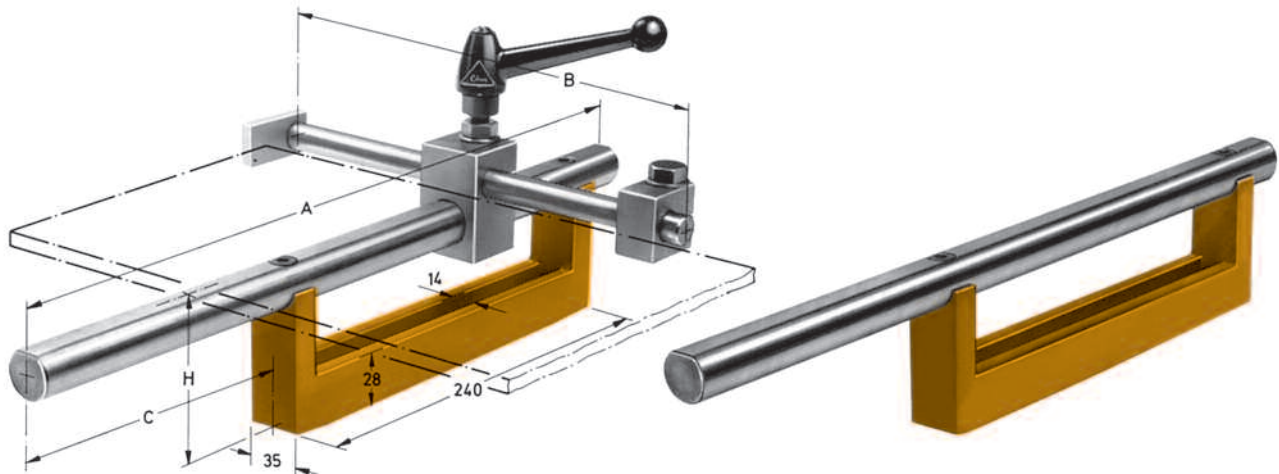

Universal limit stop

Workpiece support

Application examples

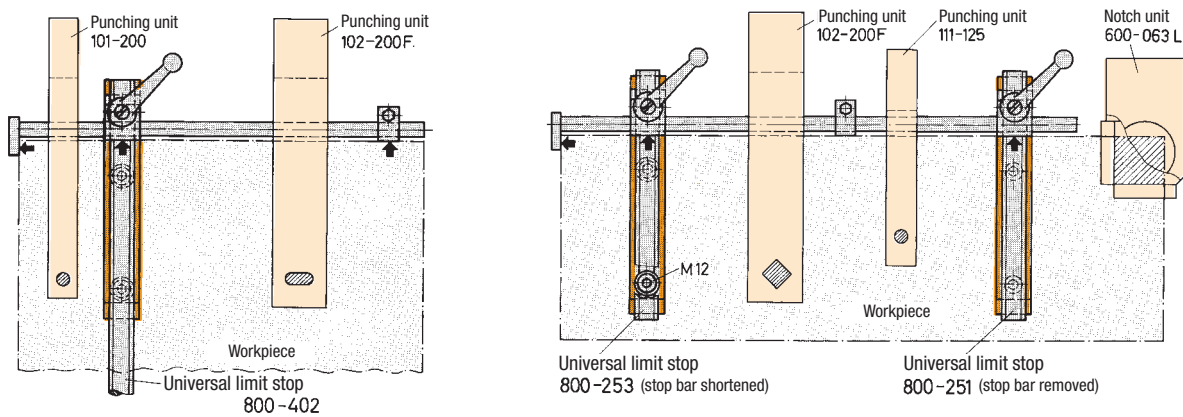

Support height H=85 mm		Support height H=125 mm		A	B	C
Workpiece limit stop Order No.	Workpiece support Order No.	Workpiece limit stop Order No.	Workpiece support Order No.			
800-251-085	810-250-085	800-251-125	810-250-125	250	250	5
800-252-085	-	800-252-125	-	250	400	5
800-253-085	-	800-253-125	-	250	630	5
800-401-085	810-400-085	800-401-125	810-400-125	400	250	135
800-402-085	-	800-402-125	-	400	400	135
800-403-085	-	800-403-125	-	400	630	135
800-631-085	810-630-085	800-631-125	810-630-125	630	250	255
800-632-085	-	800-632-125	-	630	400	255
800-633-085	-	800-633-125	-	630	630	255

Coordinate limit stop



Order No. **813-200x300** (also available laterally reversed)

Suitable for all pneumatic and hydraulic punching units with a material support height of 125 mm.


For press-operated punching units with a material support height of 85 mm, a height compensation plate is required (order no. **815-200x300**).

With the coordinate limit stops the desired distance between workpiece holes can be adjusted easily and quickly. Time consuming set up with conventional limit stops is unnecessary.

Working range or adjustment possibilities:

x-axis: 0–300 mm

y-axis: 0–200 mm


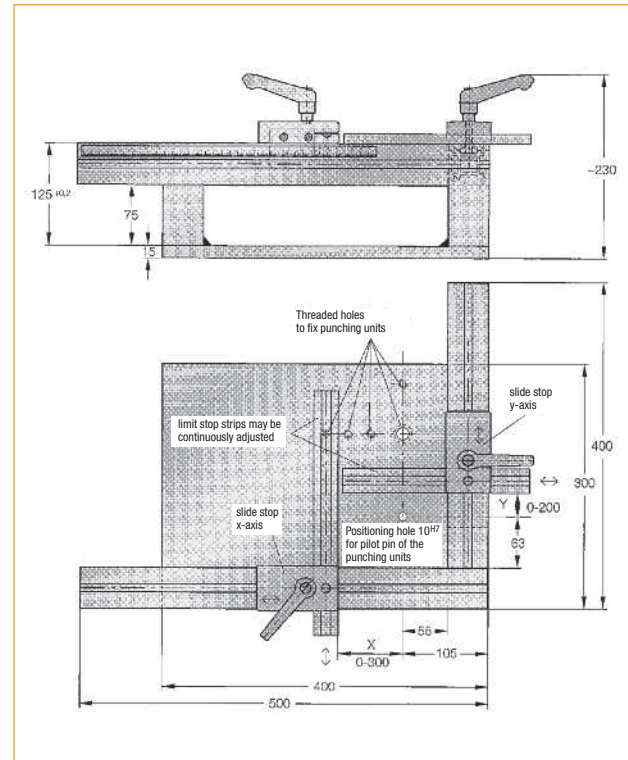


Additional coordinate limit stops


with other working ranges are available on request.

Dimensions: 400 x 500 x 230 mm

Workpiece limit stop

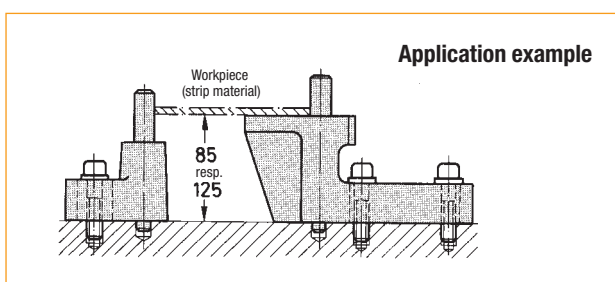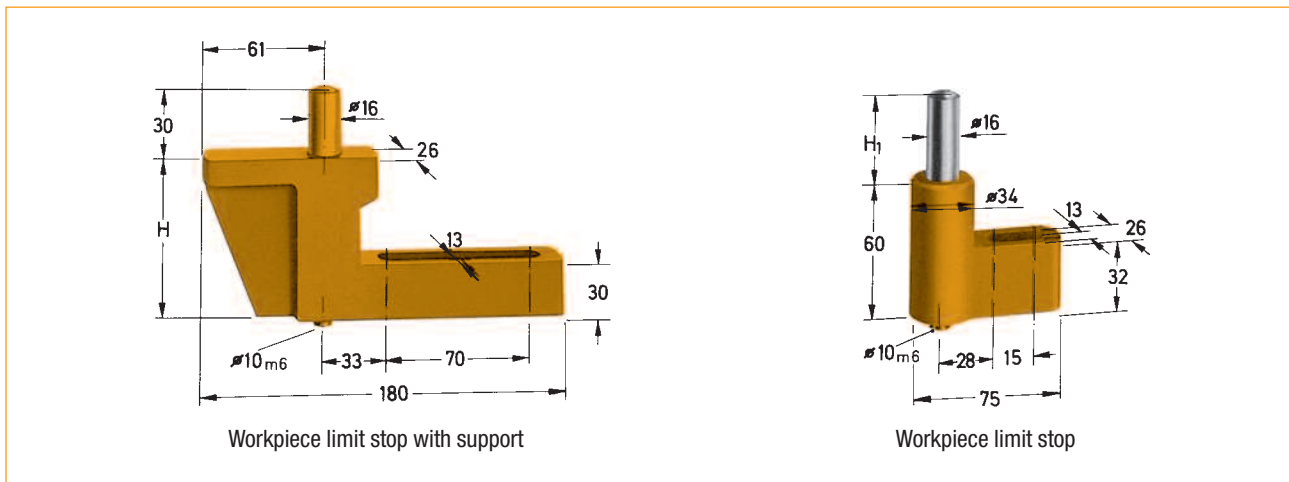

H	H ₁	Workpiece limit stop with support	Workpiece limit stop
		Order No.	Order No.
85	–	800-01-085	–
–	40	–	800-02-085
125	–	800-01-125	–
–	80	–	800-02-125

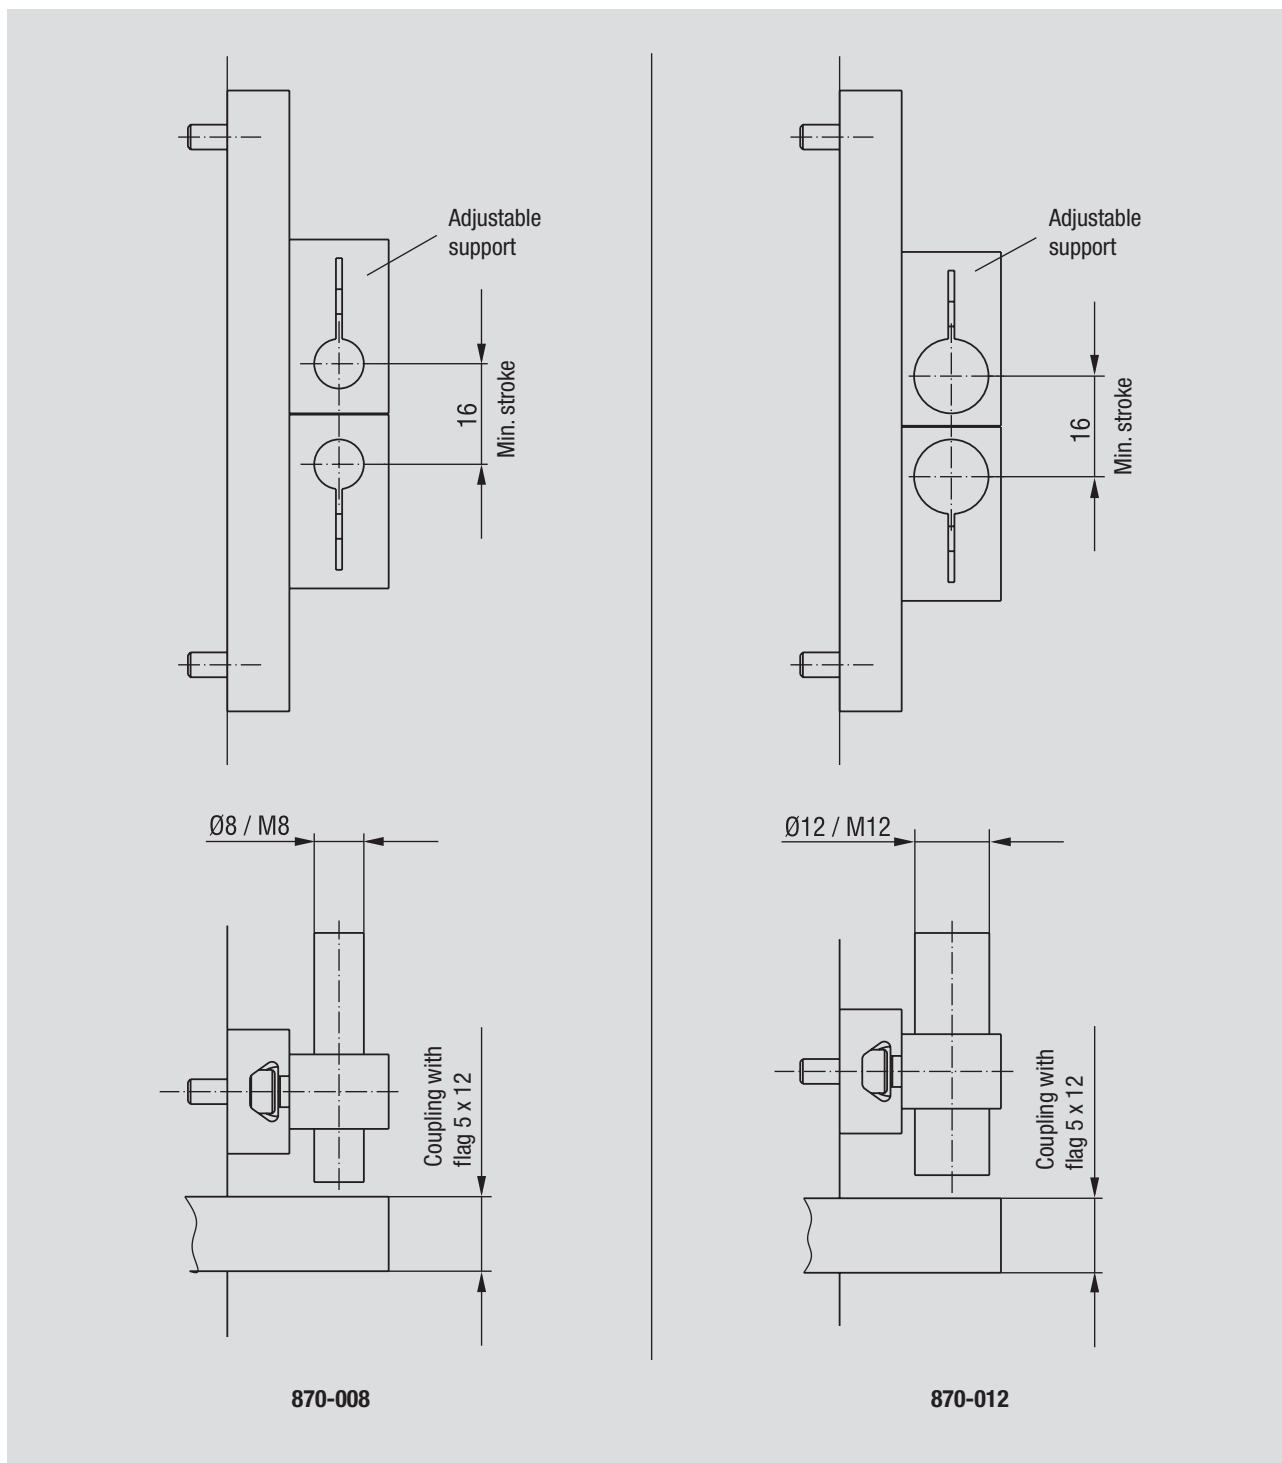

On request, the punching units of series 141-144 and 161-164 can be equipped for cylinder position query. The query is completed at a coupling flag. Inductive sensors with diameters of 8 or 12 may be used alternatively (not included in the delivery).

Order No.	Sensor-Ø
870-008	Ø8 / M8
870-012	Ø12 / M12

pneumatic features:


max. working pressure: 10 bar
 ambient temperature: from -10 °C to 70 °C
 medium temperature: from -10 °C to 50 °C
 operation with or without lubrication
 flow rate: 800 NI/min.

mechanic features:

housing and protection cap made of nylon
 reinforcing web made of steel
 Zamak diecast valve housing
 gaskets and washers made of oil- and wear-resistant materials



Pneumatisches Pedal	Steuerung	Rückstellung	Ventil	Anschlüsse	ø in mm	Durchfluß NI/min	Betätigungskraft/N	Masse/kg
AM-5000 	Pedal	Feder	3/2NC	G 1/4	6	800	20	1,25
AM-5001 	Pedal	Feder	5/2	G 1/4	6	800	20	1,45

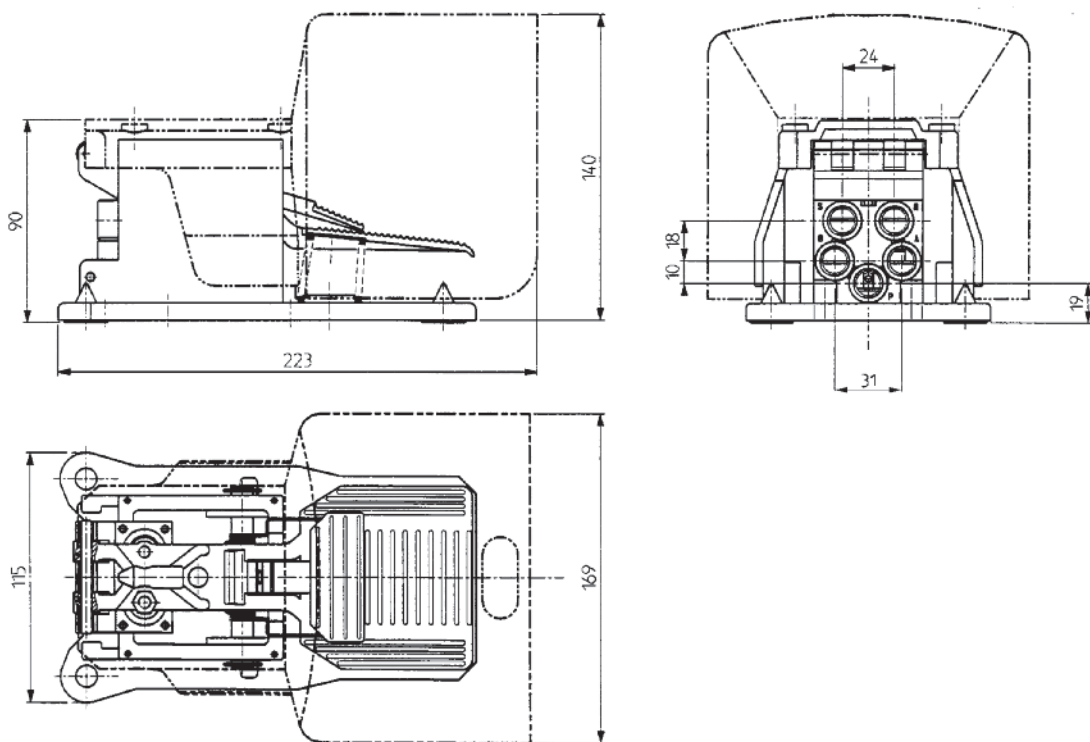

Pneumatic power cylinder, single-action

The patented pneumatic power cylinders, shown on this page, order numbers 04-1212 to 04-8025, are designed for use with the pneumatic punching, notch and cut-off units.


Due to their high tensile strength and their stroke of up to 25 mm, as well as the favourably positioned mounting flange, these elements are suitable for a wide range of operations where high forces are required. The flat and compact design enables series installation.

As illustrated in the sectional view, a pair of toggles is supplied with compressed air via the sleeve positioned behind. The generated force is transmitted directly to the piston rod. The resulting stroke force ratio fulfills all practical requirements for increased stroke accompanied by increased force, see force / stroke chart.



Up to 30 strokes per minute are achieved. For optimum use of the cylinder, i.e. high stroke frequency, the use of quick bleed valves is recommended as the cylinder is a single-action cylinder.

Further applications for these power cylinders are stamping, cold forming, pressing in of sockets and in gluing equipment where parts have to be joined under great pressure.


These power cylinders can even be used where high pretensioning forces are needed, e.g. for closing foam moulds or as clamping elements used during leak tests.

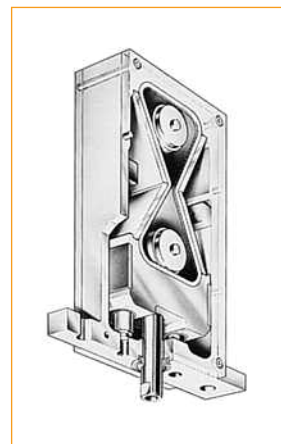

Symbol

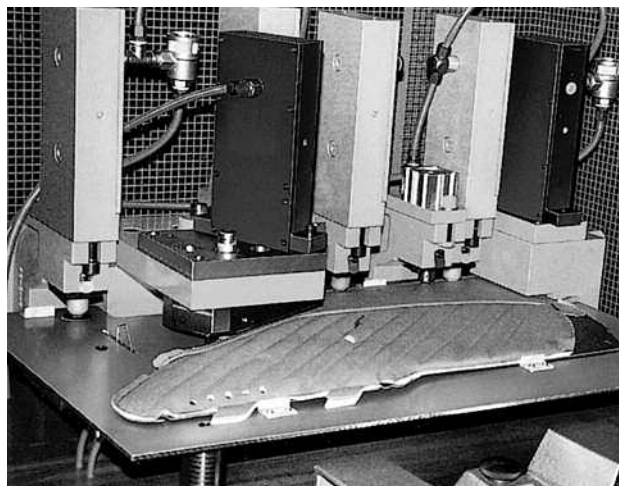



Pneumatic punching unit for punching and notching of pressboard parts covered with leather

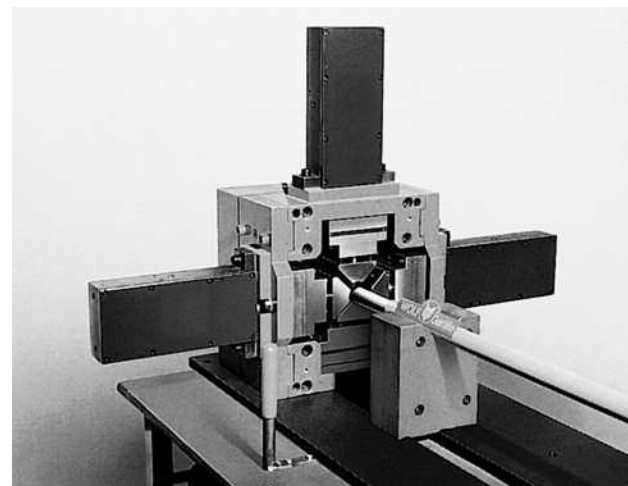



Pneumatic power cylinder for caulking of bushes

Order No.	Nominal force at 8 bar [kN]	Max. force at 8 bar [kN]	Stroke	Working pressure [bar]	Max. stroke frequency [strokes/min.]	Temperature range	Air consumption at 8 bar [dm ³ /Hub]	Weight ~ [kg]
04-1212	12	15	12	2-8	30	- 0°C to +40°C	2.5	4.8
04-1222-1	12	15	22	2-8	30		2.5	4.7
04-1222-2	12	15	22	2-8	30		2.5	4.7
04-2010	20	32	10	2-8	30		3.5	11.0
04-4010	40	50	10	2-8	20		7.2	16.5
04-8013	80	100	13	2-8	15		14.5	39.0
04-8025	80	100	25	2-8	15	14.5	39.0	



Order No. **04-1212**

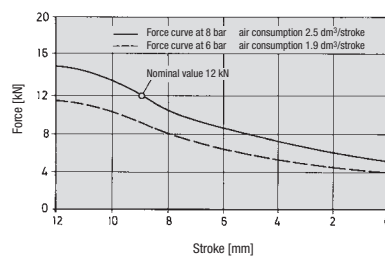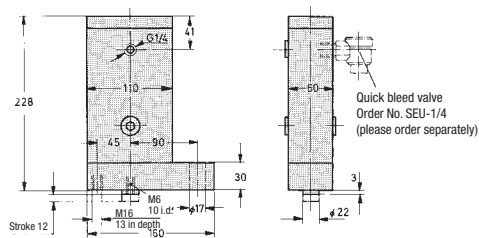



Order No. **04-1222-1**

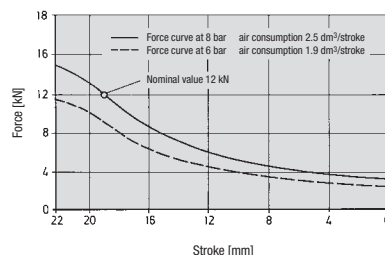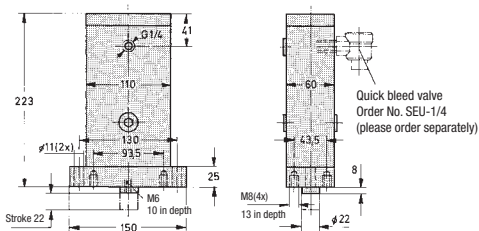



Order No. **04-1222-2**

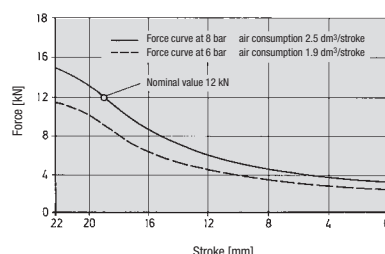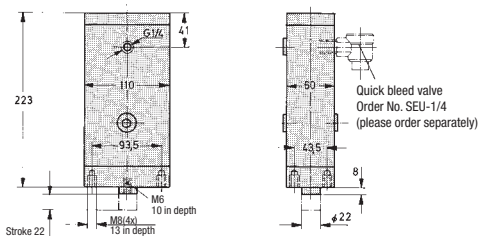



Order No. **04-2010**

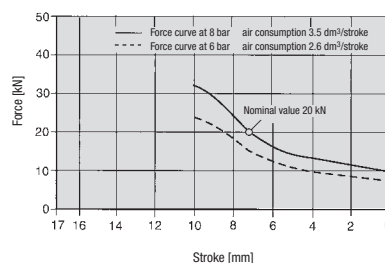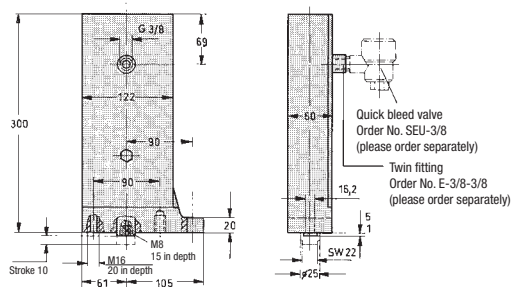

Order No. **04-4010**

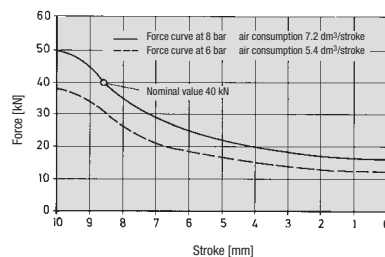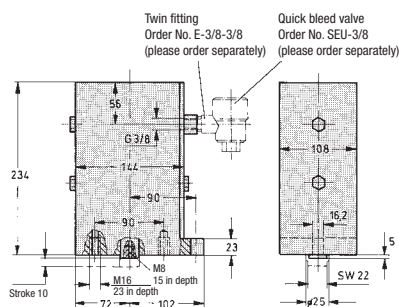

Order No. **04-8013**
and **04-8025**

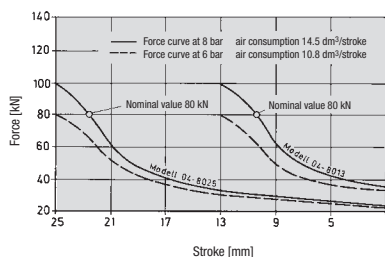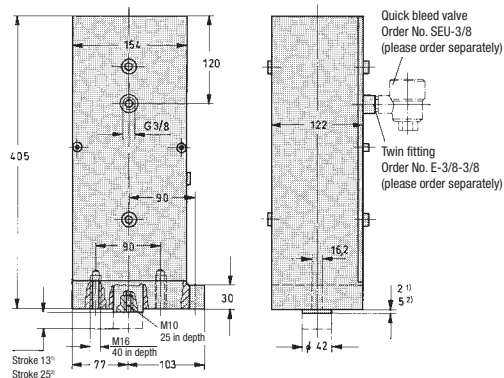

¹Model 04-8013 ²Model 04-8025


Hydropneumatic power cylinder, double action

The new power cylinder may be used for many applications, where high forces are required within a small space. Due to the compressed air operation, a hydraulic unit is not necessary. The cylinder provides complete air/oil separation and a modular design. Control is ensured by standard pneumatic valves. The cylinder is easy to maintain and guarantees a low-noise operation. The force curve during the complete stroke is linear.

The excellent price/performance ratio of these cylinders makes them very attractive for use in fixture and special machine engineering.


Please note the high restoring force.

The power cylinder can be mounted from »above« and from »below« by means of the four through holes ($\varnothing 13.5$).


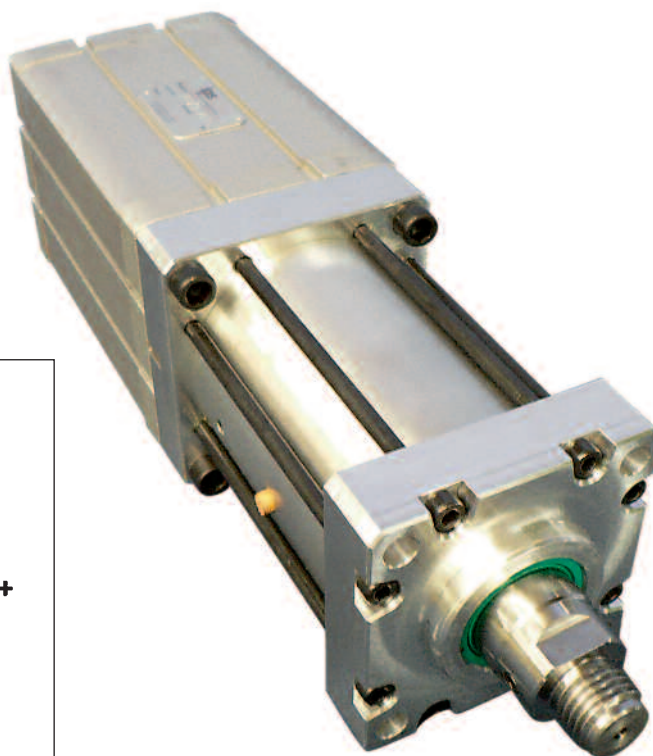


Optional cylinder position query by means of a cylinder switch (PNP, NO contact, M12 plug, 4 poles)
Order number: E999-0001-0000

Pin configuration and circuit, see drawing:

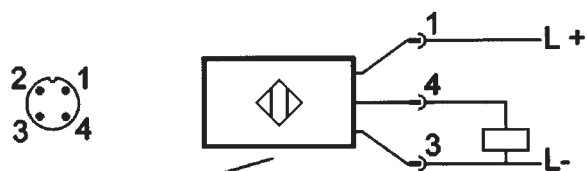


Order no.	Nominal force at 6 bar (kN)	Restoring force at 6 bar (kN)	Stroke = power stroke in mm	Max. stroke frequency (strokes/min.)	Temperature range	Air consumption at 6 bar (dm ³ /stroke)	Weight (kg)
PHZ-057-015	57	3.5	15	60	from 0°C to +40°C	22.2	18.5
PHZ-073-015	73	3.5	15	60		28.2	22
PHZ-110-015	110	3.5	15	60		42	25
PHZ-147-015	147	3.5	15	60		56	28

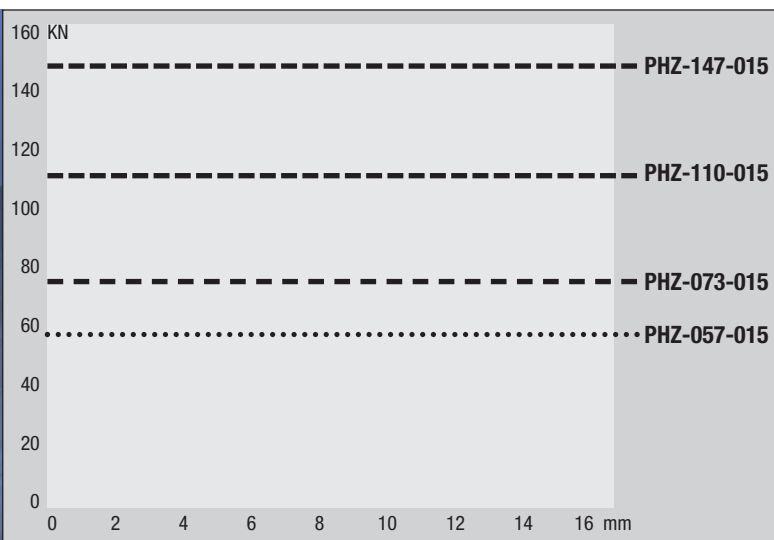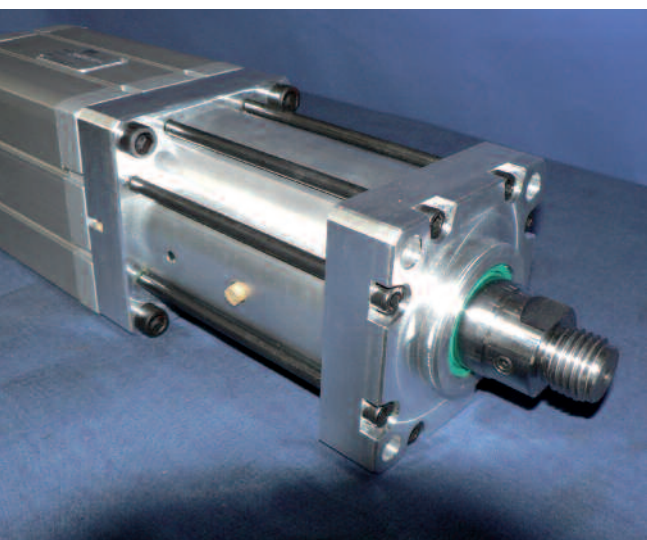

Hydropneumatic power cylinder, double action

PHZ-057-015

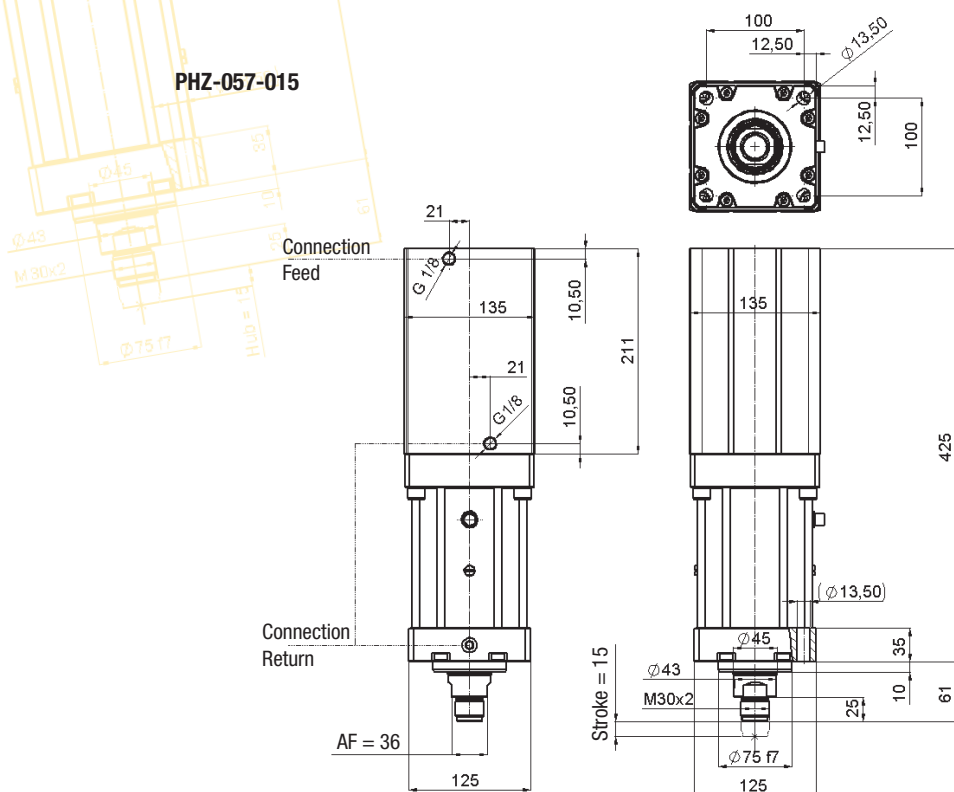


Pneumohydraulic cylinder
57 kN
Order no.: PHZ-057-015
Connection: G 1/8
Working pressure: 6 bar

PHZ-073-015

PHZ-110-015

PHZ-147-015

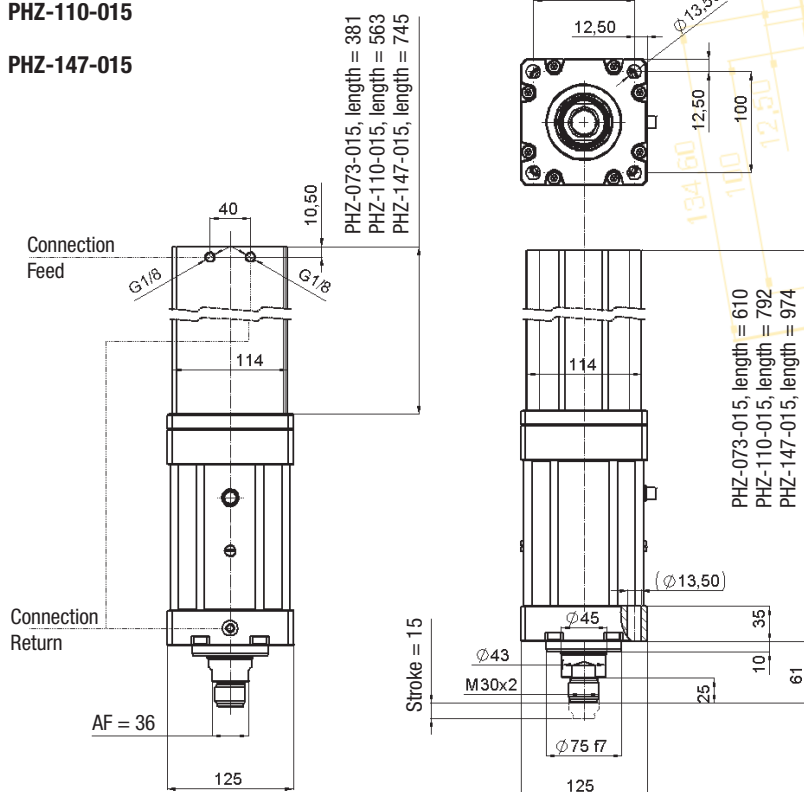


Pneumohydraulic cylinder
Order no.: PHZ-073-015 = 73 kN
PHZ-110-015 = 110 kN
PHZ-147-015 = 147 kN
Connection: G 1/8
Working pressure: 6 bar

Hydraulic short-stroke cylinder, double-action


These hydraulic short-stroke cylinders are only used to operate hydraulic double-action punching, notch and cut-off units.
They may be interchangeable between the individual hydraulic punching units using a mounting flange. Suitable mounting flanges are available on request.

Technical features:

- Solid construction.
- Optimum piston rod guide: hardened piston rod for protection against corrosion and wear, as well as for improved gliding.
- Honed cylinder tubes.
- Slide surfaces for lip seal and piston rod are finely ground and polished to extend the service life and improve the functionality of the seals.
- All seals have standard dimensions.
- Lateral oil ports, plus the prestroke port on the cylinder bottom
- Model 725D80151-1 is equipped with G3/8 oil ports.

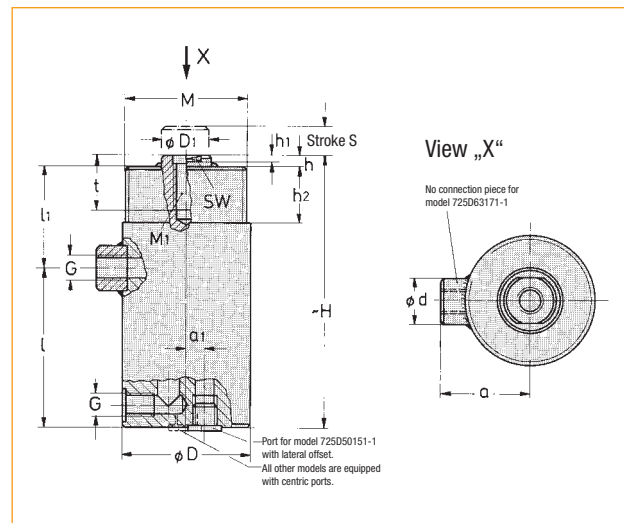

Hydraulic short-stroke cylinder to operate punching units as series punch installation.

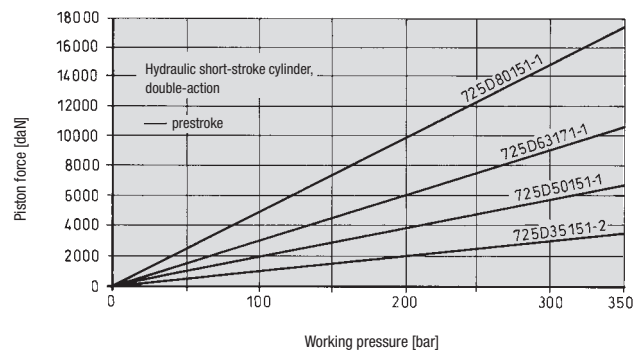

Order No.	Piston force at 100 bar		Piston force, comparable with old Order No.	Piston ϕ [mm]	Max. stroke S [mm]	Max. working pressure [bar]	Piston surface		Oil consumption/stroke		Port G	Weight ~ [kg]
	Prestroke [daN]	Return stroke [daN]					Prestroke [cm ²]	Return stroke [cm ²]	Prestroke [cm ³]	Return stroke [cm ³]		
725D35151-2	962	647	7112	35	15	350	9.62	6.47	14.4	9.7	G1/4	1.9
725D50151-1	1963	1472	7100	50	15	350	19.63	14.72	29.5	22.1	G1/4	3
725D63171-1	3117	2267	7111	63	17	350	31.17	23.13	53	39.3	G1/4	4.5
725D80151-1	5026	3769	7113	80	15	350	50.26	37.69	75.4	56.6	G3/8	10



Order No.	a	a'	ϕd	ϕD	ϕD_1	h	h ₁	h ₂	$\sim H$	l	l ₁	M	M ₁	SW	t ₁
725D35151-2	40	–	25	50	20	9	7	30	159	98	52	M48x1.5	M10	17	25
725D50151-1	47	9.5	25	65	25	6	7	30	145	85	54	M64x1.5	M12	20	30
725D63171-1	–	–	–	97	32	9	7	32	150	96	45	M80x2	M16	27	30
725D80151-1	65	–	28	105	40	9	7	29.5	183.5	102	72.5	M80x2	M16	36	31

Hydraulic block cylinder, double-action

These hydraulic double-action block cylinders are designed for use with hydraulic tool units of series 161 and 666. Their block design makes them suitable for a wide range of applications, such as clamping, pressing, aligning and straightening.

Technical features:

- Lateral hydraulic connections
- Spring retraction
- Slide ring seal with extended service life
- No stick-slip effect
- Hardened piston rod
- High resistance to transversal forces through extended piston rod guide.
- Piston rod with internal thread

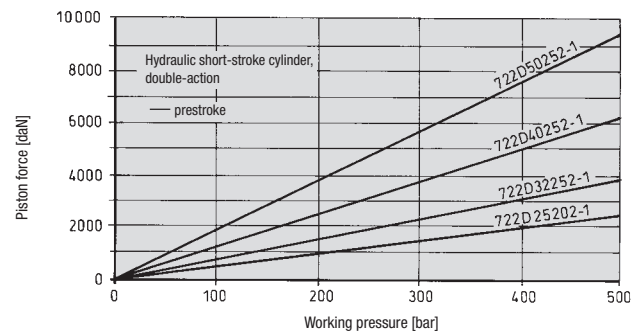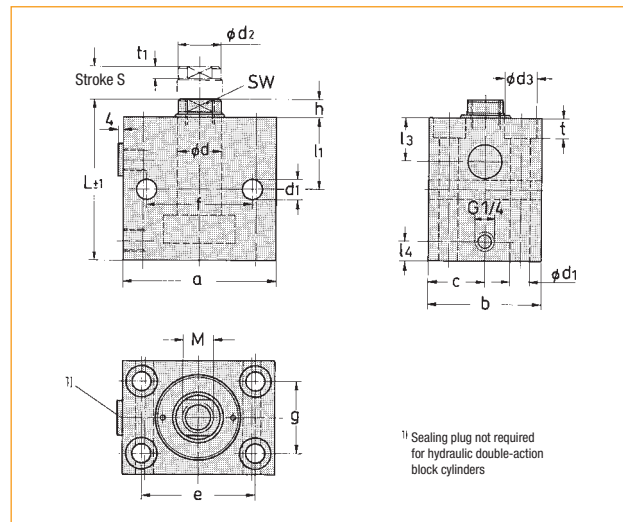

Order No.	Piston force at 100 bar		Piston force, comparable with old Order No.	Piston Ø [mm]	Max. stroke S [mm]	Max. working pressure [bar]	Piston surface		Oil consumption/stroke		Port G	Weight ~ [kg]
	Prestroke [daN]	Return stroke [daN]					Prestroke [cm²]	Return stroke [cm²]	Prestroke [cm³]	Return stroke [cm³]		
722D25202-1	480	284	7551-1	25	20	500	4.91	2.9	9.82	5.8	G1/4	1.4
722D32252-1	788	480	7552-1	32	25	500	8.04	4.9	20.1	12.25	G1/4	2.0
722D40252-1	1232	751	7553-1	40	25	500	12.56	7.66	31.4	19.15	G1/4	2.8
722D50252-1	1925	1136	7554-1	50	25	500	19.64	11.59	49.1	29	G1/4	5.7

Order No.	a	b	c	Ød	Ød ₁	Ød ₂	Ød ₃	e	f	g	h	L	l ₁	l ₃	l ₄	M x depth	SW	t	t ₁
722D25202-1	65	45	22.5	16	8.5	15	13.5	50	50	30	7	84	46	32	11	M10x15	13	9	5.5
722D32252-1	75	55	27.5	20	10.5	19	18	55	55	35	10	97	50	34	11	M12x18	17	11	7
722D40252-1	85	63	31.5	25	10.5	24	18	63	63	40	10	98	49	33	11	M16x25	21	11	7
722D50252-1	100	75	37.5	32	13	31	20	76	76	45	10	110	54	38	13	M20x30	27	13	8

The compact units are perfectly suitable for continuous use and ensure low-noise operation. They create maximum working pressures between 275 bar and 350 bar. One working cycle is included in the scope of supply. Extensions are possible. Please check which options are appropriate for your particular application.

Special units with higher power, modified working pressures, multiple working cycles and special control circuits are designed according to customer's request. We are pleased to advise you on our solutions.

Technical data

Item number	12972-0015	12972-004	12972-005	12972-007
Power	1,5kW	4 kW	5,5 kW	7,5 kW
Weight	30 kg	110 kg	130 kg	160 kg
Power supply	240V, 50Hz	400 V, 50 Hz	400 V, 50 Hz	400 V, 50 Hz
Output capacity	4,5 l/min.	7,4 l/min.	9,1 l/min.	14,5 l/min.
Working pressure	275 bar	350 bar	350 bar	350 bar
Pump type	external geared wheel pump	internal geared wheel pump	internal geared wheel pump	internal geared wheel pump
Tank	8 litres special tank	63 litres DIN steel tank	63 litres DIN steel tank	100 litres DIN steel tank
Cooling	without	oil/air heat exchanger	oil/air heat exchanger	oil/air heat exchanger
Filter	20 µm filling and ventilation filter	return filter 10 µm filling and ventilation filter	return filter 10 µm filling and ventilation filter	return filter 10 µm filling and ventilation filter
Filter monitoring	optic	optic	optic	optic
Level monitoring	optic	optic	optic	optic
Temperature monitoring	optic	optic	optic	optic
Acoustic press. level of hydr. pump	75 dB(A)	65 dB (A)	65 dB (A)	65 dB (A)
Theoretical cycle times for 1 cylinder Ø 50 mm / stroke 10 mm	0,9 sec (move out and in)	0,6 sec (move out and in)	0,5 sec (move out and in)	0,3 sec (move out and in)
Valve	4/3-way valve, electric	4/3-way valve, electric	4/3-way valve, electric	4/3-way valve, electric

Electric control units

The design of the control unit and the safety components can be discussed and checked in the individual case. Some control types are shown on the rear.



Options:



- oil collection container according to Water Resources Act, § 19.1
- electric filter monitoring
- electric level and temperature monitoring (not available for item no. 12972-0015)
- pressure filter
- water cooling
- mechanical or digital pressure switches in the pressure line for monitoring
- mechanical or digital pressure switches in the consumer devices for control
- proportional and servo valves (not available for item no. 12972-0015)
- one-way check valve leading to the different consumer devices
- hydraulic pilot-controlled check valves leading to the different consumer devices

Hydraulic unit: 12972-004, 12972-005 and 12972-007

Dimension X depends on the control type

Hydraulic unit: 12972-0015

Dimension X depends on the control type

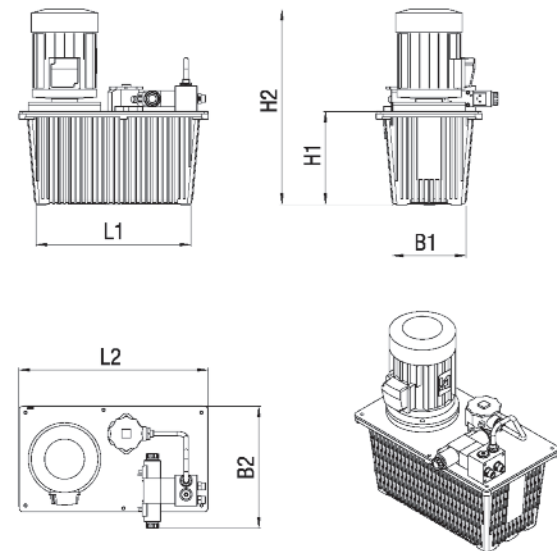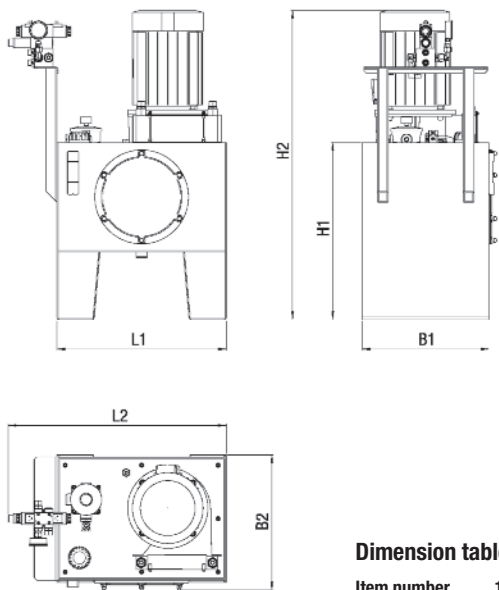


Dimension table

Item number	12972-0015	12972-004	12972-005	12972-007
length L1	427	508	508	633
length L2	521	690	690	815
width B1	203	375	375	474
width B2	336	406	406	503
height H1	256	660	660	660
height H2	537	1065	1065	1153

The following control types are possible:


electro-hydraulic pump unit with press safety valve

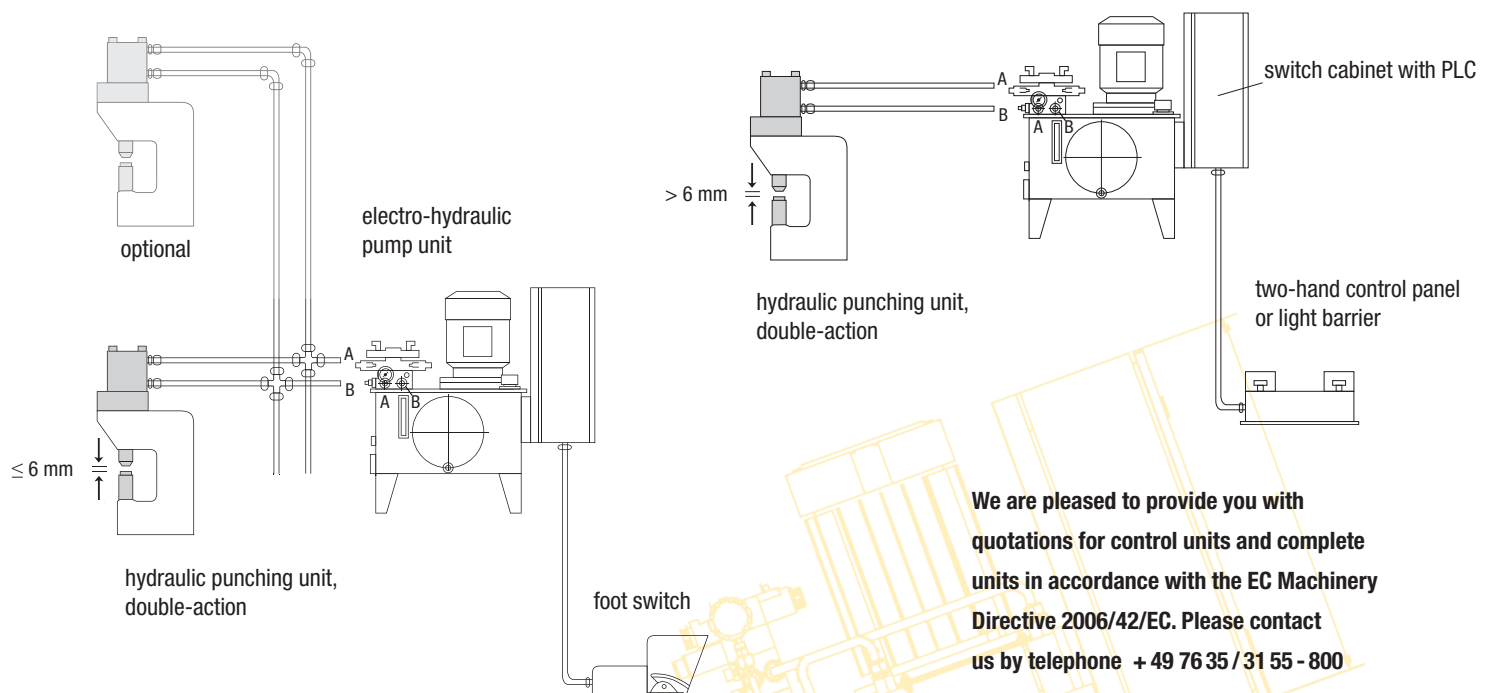

We are pleased to provide you with quotations for control units and complete units in accordance with the EC Machinery Directive 2006/42/EC. Please contact us by telephone + 49 76 35 / 31 55 - 800

INTELLIGENT PUNCHING SOLUTIONS

Small Presses //

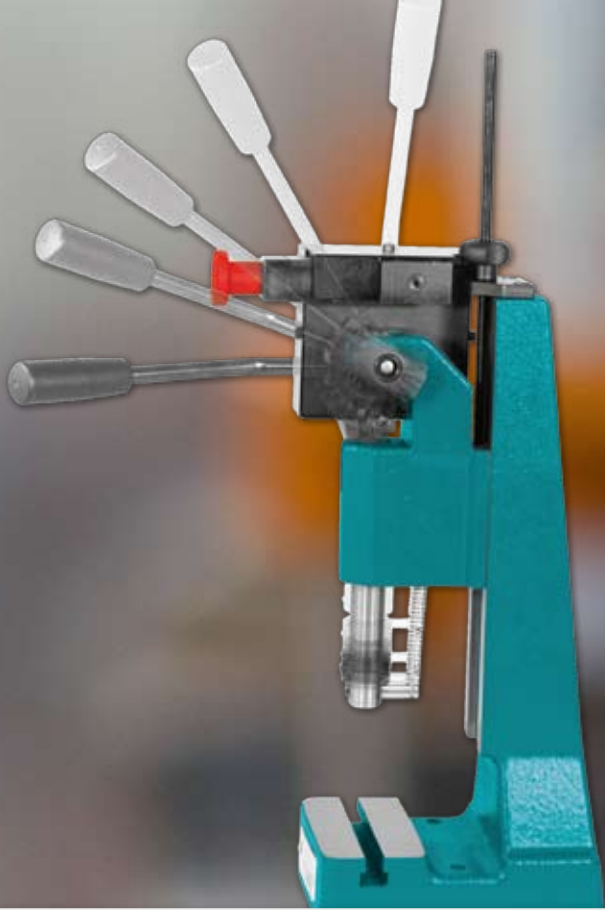

Small Presses //

INTELLIGENT PUNCHING SOLUTIONS

Pressen-Arbeitsplätze

Sonderausführungen

Handhebelpressen

- Extras für Handhebelpressen
- Kniehebelpressen mit Rundstößel
- Kniehebelpressen mit Vierkantstößel
- Zahnstangenpressen mit Rundstößel
- Zahnstangenpressen mit Vierkantstößel

Druckluftpressen

- Kniehebel-Druckluftpressen
- Handunterstützte Kniehebel-Druckluftpressen
- Direktwirkende Druckluftpressen
- Direktwirkende Pressenzylinder
- MicroPress mit Vierkantstößel
- Hydro-Pneumatische Pressen

Schiebetische

Standard Steuerungen


Prozessüberwachung TPC

Press & Tool Concept


- Pressen / Werkzeuge Übersicht
- KP 2.1 Hand-Kniehebelpressen
- KP 3.1 Druckluftpressen
- Werkzeugsysteme

ips Pressen, die Anwendungen


mit ips Pressen können eine Vielzahl von Arbeitsgängen schnell, präzise und leicht erledigt werden, wie zum Beispiel:




Montieren




Einpressen




Biegen




Nieten



Abkanten



Stanzen



Crimpen

Neben den Pressen bietet **ips** auch die Konstruktion und den Bau von kompletten Arbeitsplätzen an. **ips** Pressen werden somit den heutigen Forderungen nach einem flexiblen Arbeitsmittel gerecht, das schnell der immer größer werdenden Modellvielfalt in kleineren Losgrößen und kürzeren Produktionszyklen angepasst werden kann. Flexible manuelle Arbeitsplätze, die nach Kundenwunsch gestaltet werden, bedeuten dabei eine überschaubare Investition. Unsere Bilder aus der Praxis zeigen einige der vielen Lösungsmöglichkeiten.



Farben

- Standard Farbe RAL 5021 oder auf Wunsch ohne Mehrkosten RAL 7035
- Sonderfarben aus dem RAL Segment gegen Mehrpreis




RAL 5021

RAL 7035

Sondermodelle

Trotz der Vielzahl an Standard Pressen gibt es Anwendungsfälle, bei denen die Modifikation von bestehenden Modellen nötig ist, um den Fertigungsprozess zu optimieren oder überhaupt möglich zu machen. ips pressen konstruiert und fertigt diese Sondermodelle in Absprache mit Ihnen.

- Reinraum Modelle in verschiedenen Ausführungen nach Kunden Vorgaben
- Erweiterte Arbeitshöhe oder Ausladung
- Anwenderspezifische Sonderfunktionen

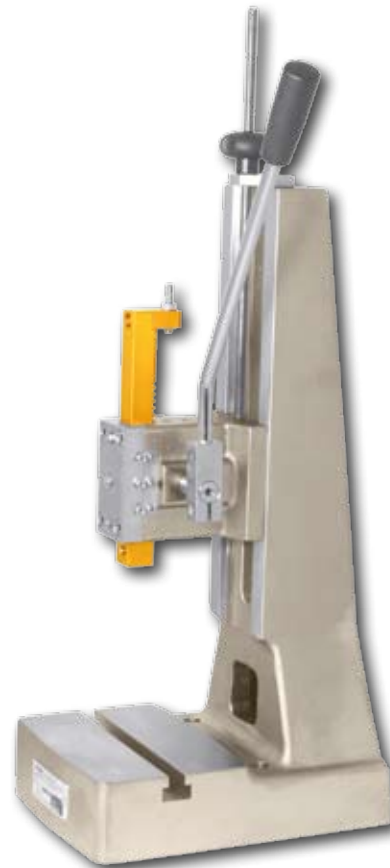

Beispiel: Reinraum Ausführung
 Gussteile chemisch vernickelt, ansonsten rostfreier Stahl

Eine kleine Auswahl von modifizierten Pressen




Druckkraftbereich: von 1,5 kN bis 30 kN

Handhebelpressen bieten hohe Wirtschaftlichkeit für Produktionsprozesse und Seriengrößen, die keine Automation erfordern. Dort können sie schnell und flexibel eingesetzt werden.


ips stellt zwei Arten Handhebelpressen mit verschiedenen Kraftverläufen her: Kniehebelpressen und Zahnstangenpressen. Alle ips Handhebelpressen sind sowohl mit Rundstößel als auch mit Vierkantstößel lieferbar.

Qualitätsmerkmale

- Werkseits eingestellter Druckpunkt
- Einfache und schnelle Höhenverstellung des Pressenkopfs über eine Gewindespindel
- Gehärteter und geschliffener Stößel
- Lange, gehonte und deshalb hochpräzise Rundstößelführung
- Hochgenaue Vierkantstößelführung durch einstellbare Führungsleisten
- Geschliffener Pressentisch
- ips Handhebelpressen sind praktisch wartungsfrei

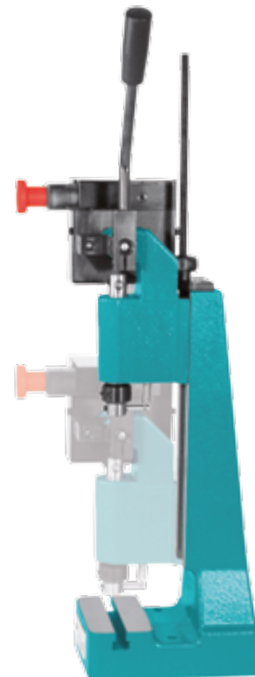

Beispiel: höhenverstellbarer Pressenkopf

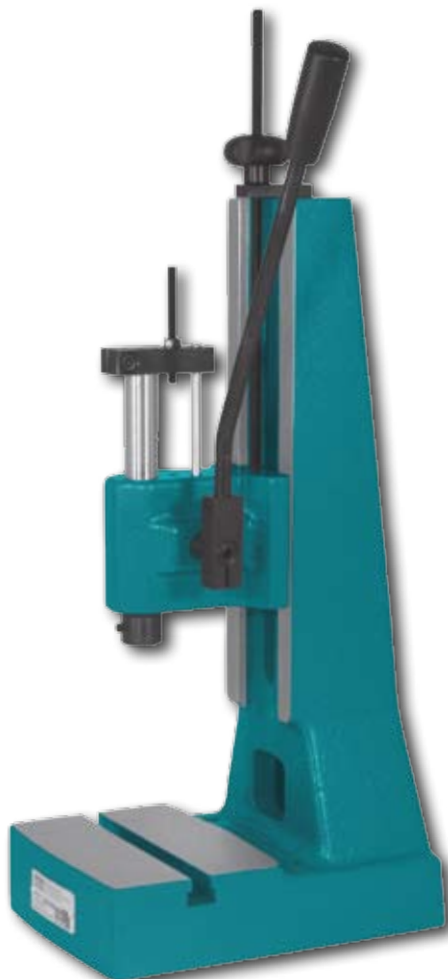


Beispiel: Zahnstangenpresse



Beispiel: Kniehebelpresse

Piktogramme zeigen Ihnen im Katalog, welche Extras oder Zubehör an welchen Pressen möglich sind.



Druckpunkt-Feineinstellung (DP)


Da Kniehebelpressen ihre maximale Kraft erst im UT erreichen, ist die Höheneinstellung des Pressenkopfs über die Gewindespindel oft zu ungenau. Mit der Druckpunkt-Feineinstellung kann der Druckpunkt der Presse präzise direkt am Stößel eingestellt werden. Die Skala am Justiering erlaubt eine ablesbare Feineinstellung von 0,02 mm. Der Verstellbereich beträgt $\pm 1,5$ mm.

Die Druckpunkt-Feineinstellung wird eingesetzt, wenn es auf höchste Präzision der Einpresstiefe ankommt. Ideal für den Prototypenbau und die Serienfertigung, wenn genaues und leichtes Einstellen innerhalb des Toleranzbereichs gefordert ist.




Mikrometeranschlag (MICRO)

Bei Zahnstangenpressen kommt für hochpräzise Montagearbeiten, oder wenn das Werkstück genau positioniert werden muss, der Mikrometeranschlag zum Einsatz. Mit ihm kann die Hublänge der Presse auf 0,01 mm genau eingestellt werden.




Hubsicherung (HS)

Die Hubsicherung für Kniehebel- und Zahnstangenpressen ist ein effektiver Beitrag zur Qualitätssicherung während der Produktion. Mit der Hubsicherung sind Teilhübe – und damit unvollständige Arbeitsgänge – ausgeschlossen. Verformungs-, Füge- oder Verbindungsvorgänge werden immer und sicher komplett ausgeführt: Beim Abwärtshub ist der Rückhub der Presse blockiert. Erst wenn der Hub komplett durchgeführt wurde, wird die Verriegelung gelöst, und der Hebel kann zurückgestellt werden. Der Lösemechanismus Quick-Release ermöglicht, dass die Sperrung in jeder Position gelöst und verkantete Teile entnommen werden können. Beim Rückstellen des Hebels wird Quick-Release automatisch wieder deaktiviert.



Tischbohrung (TB)

In der zentrischen Tischbohrung können Werkzeugunterteile aufgenommen werden. Die Fixierung erfolgt mittels einer Querschraube bei allen Modellen bis 80mm Ausladung. Die Tischbohrung ermöglicht einen schnellen Werkzeugwechsel und reduziert die Einrichtzeit. Die Fluchtungsgenauigkeit der Stößelbohrung zur Tischbohrung beträgt $< 0,05$ mm.








Hubzähler (Z)

Mit dem fünfstelligen Hubzähler lässt sich die produzierte Stückzahl schnell überblicken. Die Stückzahl kann zurückgesetzt werden.



Die Extras



Hand-Kniehebelpressen mit Rundstößel EP-Serie

EP Typ Kniehebelpressen in den Größen 5 kN, 7,5 kN und 12 kN sind dimensioniert, um an Handarbeitsplätzen Serien- oder Einzelanfertigungen herzustellen.


Da die nominale Endkraft am Hubende entsteht, kann große Kraft punktgenau dort eingesetzt werden, wo sie gebraucht wird.

Die aufzubringende Handkraft von 120 N ist anwenderfreundlich.

Da viele Anwendungen mit weniger Kraft auskommen, ist ermüdungsfreies Arbeiten auch bei Serienfertigung möglich.



ERGOPRESS®-Handhebel

- Ergonomischer Bedienerkomfort.
- 360° stufenlos verstellbar
- Seitlich abgewinkelter Hebel: freier Blick auf Arbeitsbereich und ergonomisch angenehme Position.
- Einfaches und schnelles Umrüsten für Linkshänder (außer bei HS und Z Option), ohne dass die Werkzeugeinstellung verloren geht. Ideal bei Jobsharing an einer Presse.

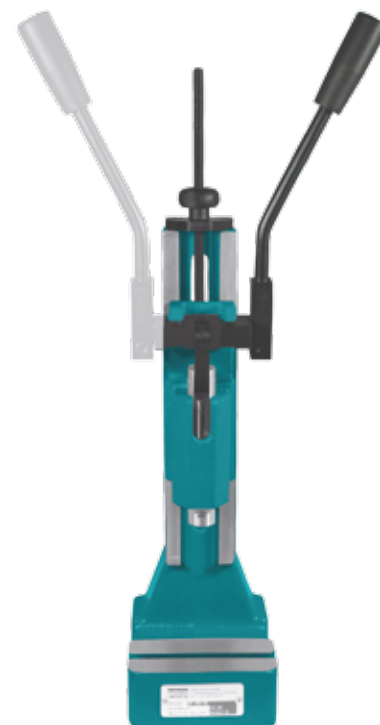

Handhebel umsteckbar für Links- oder Rechtshänder

EP Typ Pressen sind moderne Produktionswerkzeuge mit hoher Präzision. Das bedienerfreundliche Design erhöht die Produktivität und verhindert arbeitsplatzbedingte Zwangs- und Fehlhaltungen der Bediener.

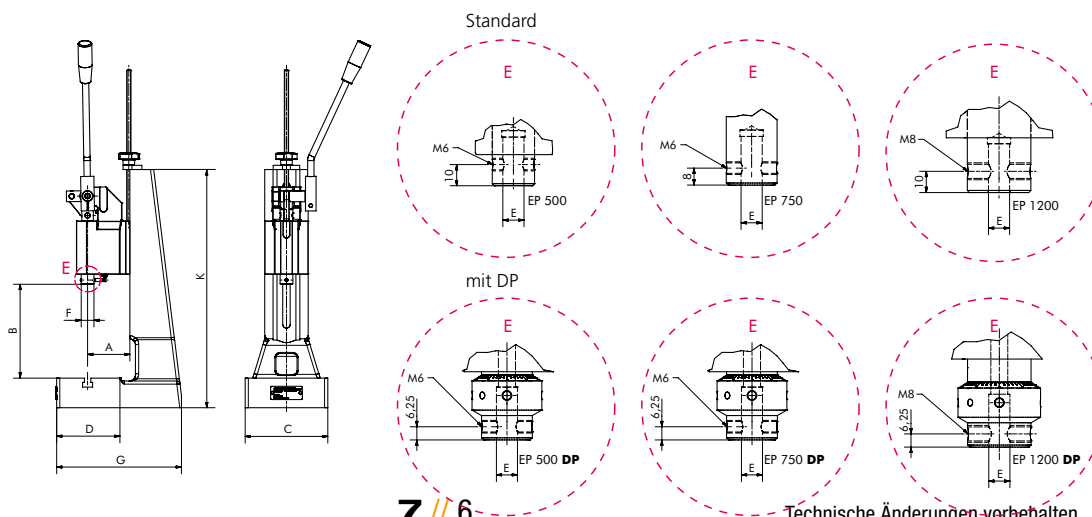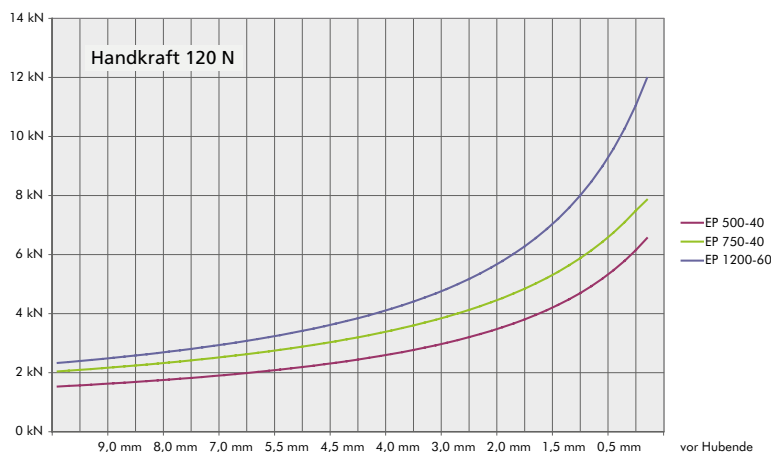

EP Serie: L-EP Serie mit extra großer Arbeitshöhe



EP 500-40



EP 750-40




L-EP 1200-60

mit Extras
 DP - Druckpunktfeineinstellung
 HS - Hubsicherung

Typ			EP 500-40	EP 750-40	L-EP 750-40	EP 1200-60	L-EP 1200-60
Druckkraft		kN	5,0	7,5	7,5	12,0	12,0
Arbeitshub		mm	40	40	40	60	60
Ausladung	A	mm	63	80	80	80	80
Arbeitshöhe	B	mm	40 - 213	58 - 265	55 - 375	62 - 240	75 - 338
Arbeitshöhe mit DP	B	mm	20 - 197	38 - 250	39 - 359	48 - 231	53 - 328
Tischgröße	CxD	mm	110 x 65	157 x 115	157 x 115	157 x 115	157 x 115
Nutbreite ähnlich DIN 650		mm	10	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 30	10 ^{H7} x 30
Stößelbohrung Ø x Tiefe mit DP	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößel Ø	F	mm	20	24	24	30	30
Platzbedarf	CxG	mm	110 x 164	157 x 237	157 x 280	157 x 237	157 x 280
Ständerhöhe	K	mm	355	450	570	450	570
Gewicht		kg	ca. 10	ca. 20	ca. 28	ca. 24	ca. 32


Extras (siehe Seite 7)	Bei Bestellung bitte angeben.				
Druckpunktfeineinstellung	DP	DP	DP	DP	DP
Hubsicherung	HS	HS	HS	HS	HS
Zähler	Z	Z	Z	Z	Z
Tischbohrung 12 ^{H7}	TB	TB	TB	TB	TB

Die Extras




APK T-Serie

Die extra starken Hand-Kniehebelpressen der Serien APK T 3 und APK T 4 eignen sich speziell für den oft wechselnden Einsatz im Modellbau und in der Werkstatt. Ihre hohen Druckkräfte von bis zu 30 kN erlauben einen flexiblen Einsatz für die verschiedensten Anwendungsfälle.







Die Vorteile:

- Verschiedene Hublängen stehen zur Auswahl
- Extra stabile Konstruktion des Pressenständers
- Die Arbeitshöhe lässt sich über die serienmäßige Höhenverstellung des Pressenkopfs mittels einer Gewindespindel schnell verstellen
- Die Nennkraft der Presse ist mit durchschnittlichem Kraftaufwand zu erreichen



XL-APKT Serie mit 250 mm Ausladung

Überall, wo sperrige Teile verarbeitet werden, wird eine größere Ausladung verlangt: z.B. für die Bearbeitung von Leiterplatten, Blechen und ähnlichen Teilen. Hier werden ips XL-Pressen mit 250 mm Ausladung eingesetzt. Die Basis ist eine stabile Schweißkonstruktion, an die verschiedene Standard-Pressenköpfe angebaut werden.

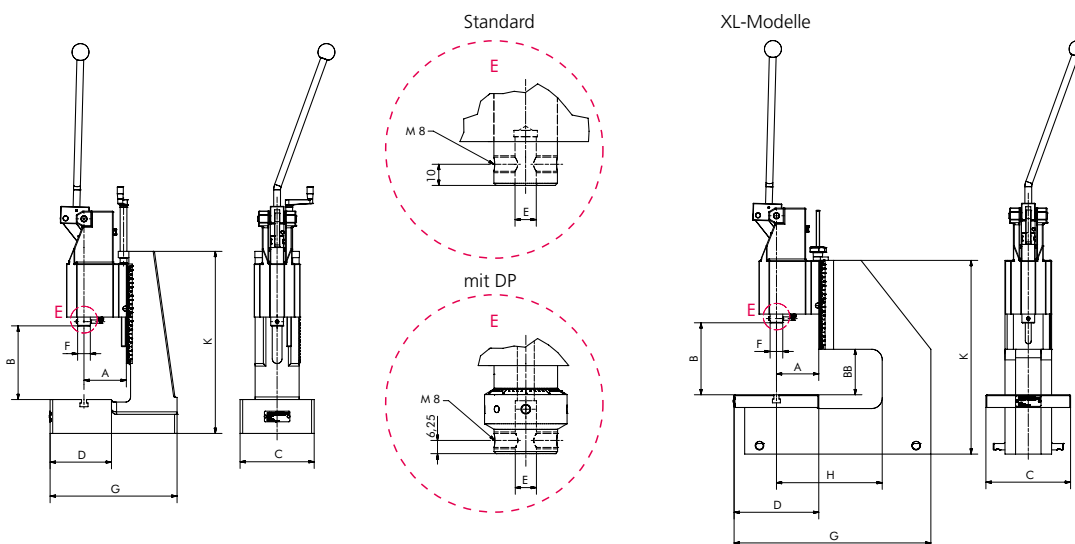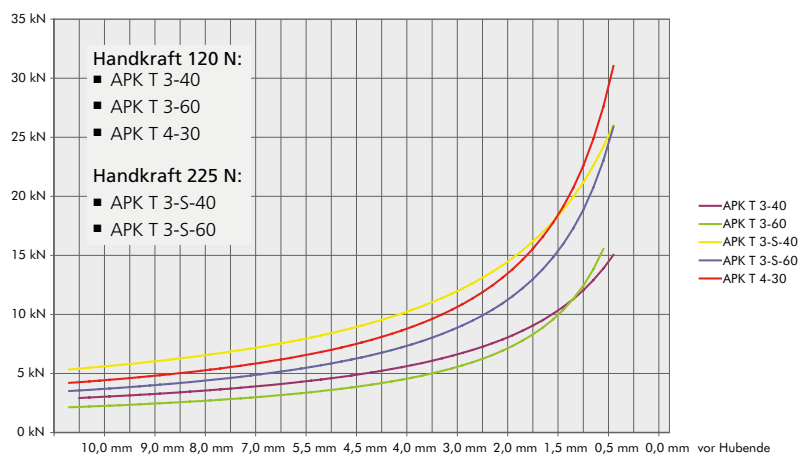



APK T 3-40






APK T 3-S-60

XL-APK T 3-40

Typ			APK T3-40	APK T3-60	APK T3-S-40	APK T3-S-60	APK T4-30	XL-APK T3-40	XL-APK T3-60
Druckkraft		kN	15,0	15,0	25,0	25,0	30,0	15,0	15,0
Arbeitshub		mm	40	60	40	60	30	40	60
Ausladung	A	mm	100	100	100	100	100	250	250
Ausladung C-Gestell	H	mm	-	-	-	-	-	100	100
Arbeitshöhe	B	mm	49 - 168	51 - 172	60 - 290	65 - 295	55 - 285	88 - 166	90 - 168
Arbeitshöhe mit DP	B	mm	35 - 154	30 - 151	46 - 274	44 - 274	34 - 264	72 - 150	69 - 147
Arbeitshöhe C-Gestell	BB	mm	-	-	-	-	-	100	100
Tischgröße	CxD	mm	175 x 140	175 x 140	185 x 145	185 x 145	185 x 145	200 x 200	200 x 200
Nutbreite ähnlich DIN 650		mm	12	12	12	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30
Stößelbohrung Ø x Tiefe mit DP			10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößel Ø	F	mm	30	30	30	30	30	30	30
Platzbedarf	CxG	mm	175 x 300	175 x 300	185 x 320	185 x 320	185 x 320	200 x 465	200 x 465
Ständerhöhe	K	mm	425	425	520	520	520	465	465
Gewicht		kg	ca. 39	ca. 43	ca. 58	ca. 63	ca. 63	ca. 54	ca. 58

Extras (siehe Seite 7)	Bei Bestellung bitte angeben.							
Druckpunktfeineinstellung	DP	DP	DP	DP	DP	DP	DP	DP
Hubsicherung	HS	HS	HS	HS	HS	HS	HS	HS
Zähler	Z	Z	Z	Z	Z	Z	Z	Z
Tischbohrung 12 ^{H7}	TB	TB	TB	TB	TB	TB	TB	TB

Die Extras




Der Vierkantstößel hat entscheidende Vorteile gegenüber dem Rundstößel:

- Absolute Verdrehsicherheit
- Gehärteter und präzise geschliffener Stößel
- Spielfreie Führung des Pressenstößels
- Nachstellbare Führungsleisten des Vierkantstößels
- Große Auflagefläche für das Werkzeug
- Deshalb sind Führungen im Werkzeug meist unnötig
- Praktisch wartungsfreier Betrieb



ips Hand-Kniehebelpressen mit Vierkantstößel sind ideale Werkzeuge für die Fertigung präziser Kleinteile mit engen Toleranzen in kleineren und mittleren Serien, bei denen eine Automation zu kostenintensiv ist.

ERGOPRESS®-Handhebel

- Ergonomischer Bedienerkomfort.
- 360° stufenlos verstellbar
- Seitlich abgewinkelter Hebel: freier Blick auf Arbeitsbereich und ergonomisch angenehme Position.
- Einfaches und schnelles Umrüsten für Linkshänder (außer bei HS und Z Option), ohne dass die Werkzeugeinstellung verloren geht. Ideal bei Jobsharing an einer Presse.

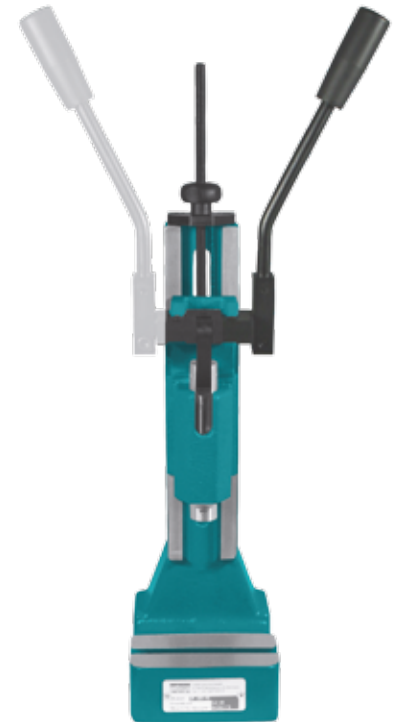

Handhebel umsteckbar für Links- oder Rechtshänder

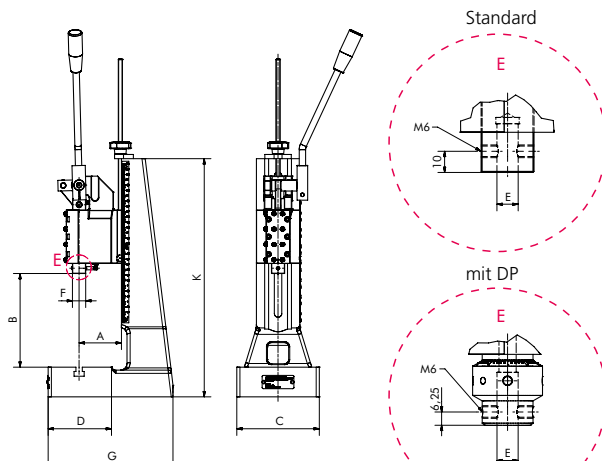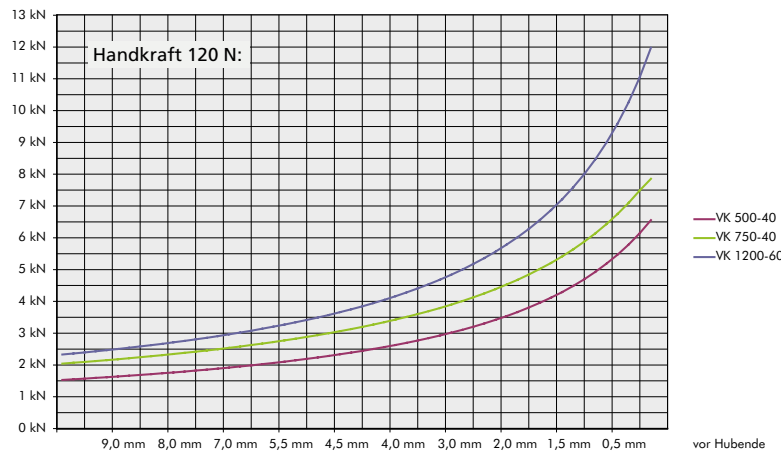



VK 500-40

L-VK 750-40






L-VK 1200

mit Extra
HS - Hubsicherung

Typ			VK 500-40	VK 750-40	L-VK 750-40	VK 1200-60	L-VK 1200-60
Druckkraft		kN	5,0	7,5	7,5	12,0	12,0
Arbeitshub		mm	40	40	40	60	60
Ausladung	A	mm	63	80	80	80	80
Arbeitshöhe	B	mm	40 - 213	53 - 265	55 - 375	45 - 245	52 - 352
Arbeitshöhe mit DP	B	mm	25 - 197	38 - 250	39 - 359	31 - 231	38 - 338
Tischgröße	CxD	mm	110 x 65	157 x 115	157 x 115	157 x 115	157 x 115
Nutbreite ähnlich DIN 650		mm	10	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 30	10 ^{H7} x 30
Stößelbohrung Ø x Tiefe mit DP	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößelfläche	F	mm	21 x 21	25 x 25	25 x 25	31 x 31	31 x 31
Platzbedarf	CxG	mm	110 x 164	155 x 237	155 x 280	155 x 237	155 x 280
Ständerhöhe		mm	355	450	570	450	570
Gewicht		kg	ca. 10	ca. 20	ca. 28	ca. 24	ca. 32

Extras (siehe Seite 7)	Bei Bestellung bitte angeben.				
Druckpunktfeineinstellung	DP	DP	DP	DP	DP
Hubsicherung	HS	HS	HS	HS	HS
Zähler	Z	Z	Z	Z	Z
Tischbohrung 12 ^{H7}	TB	TB	TB	TB	TB

Die Extras



VK-Serie

Die extra starken Hand-Kniehebelpressen der VK-Serie eignen sich speziell für den oft wechselnden Einsatz im Modellbau und in der Werkstatt. Ihre hohen Druckkräfte von bis zu 30 kN erlauben einen flexiblen Einsatz für die verschiedensten Anwendungsfälle.



Die Vorteile:

- Verschiedene Hublängen stehen zur Auswahl
- Extra stabile Konstruktion des Pressenständers
- Die Arbeitshöhe lässt sich über die serienmäßige Höhenverstellung des Pressenkopfs mittels einer Gewindespindel schnell verstellen
- Die Nennkraft der Presse ist mit durchschnittlichem Kraftaufwand zu erreichen

XL-VK Serie mit 250 mm Ausladung

Überall, wo sperrige Teile verarbeitet werden, wird eine größere Ausladung verlangt: z.B. für die Bearbeitung von Leiterplatten, Blechen und ähnlichen Teilen. Hier werden ips XL-Pressen mit 250 mm Ausladung eingesetzt.

Die Basis ist eine stabile Schweißkonstruktion, an die verschiedene Standard-Pressenköpfe angebaut werden.

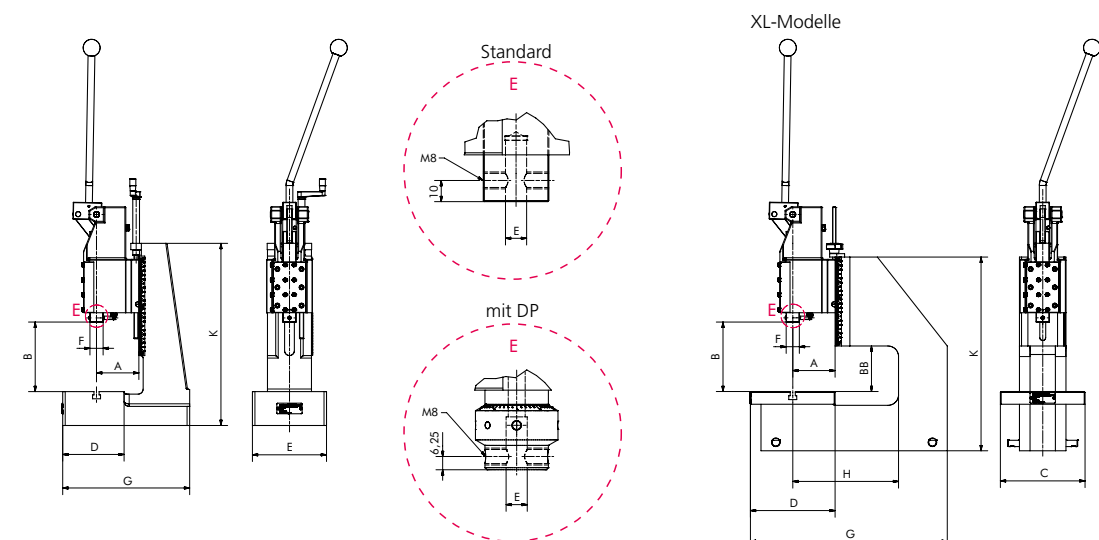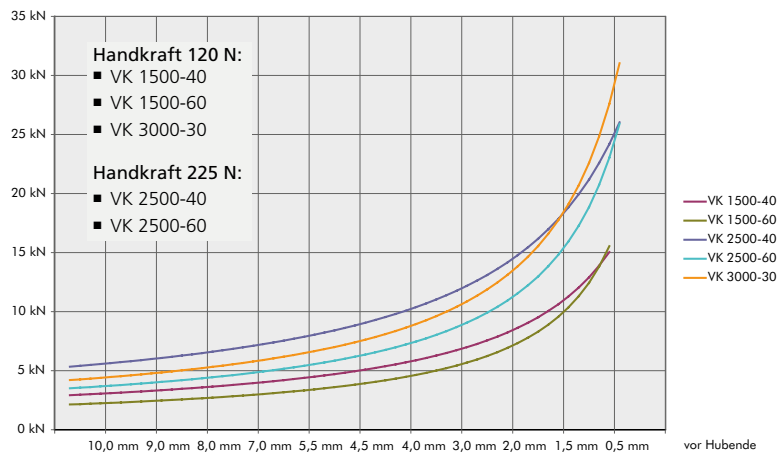



VK 1500-40





VK 2500-60

XL-VK 1500-40

Typ		VK 1500-40	VK 1500-60	VK 2500-40	VK 2500-60	VK 3000-30	XL-VK 1500-40	XL-VK 1500-60
Druckkraft	kN	15,0	15,0	25,0	25,0	30,0	15,0	15,0
Arbeitshub	mm	40	60	40	60	30	40	60
Ausladung	A mm	100	100	100	100	100	250	250
Ausladung C-Gestell	H mm	-	-	-	-	-	100	100
Arbeitshöhe	B mm	49 - 168	49 - 168	60 - 290	65 - 295	65 - 295	80 - 166	88 - 166
Arbeitshöhe mit DP	B mm	35 - 154	35 - 154	46 - 274	44 - 274	44 - 274	72 - 150	72 - 150
Arbeitshöhe C-Gestell	BB mm	-	-	-	-	-	100	100
Tischgröße	CxD mm	175 x 140	175 x 140	185 x 145	185 x 145	185 x 145	200 x 200	200 x 200
Nutbreite ähnlich DIN 650	mm	12	12	12	12	12	12	12
Stößelbohrung Ø x Tiefe	E mm	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30	10 ^{H7} x 30
Stößelbohrung Ø x Tiefe mit DP	E mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößelfläche	F mm	31 x 31	31 x 31	31 x 31	31 x 31	31 x 31	31 x 31	31 x 31
Platzbedarf	CxG mm	175 x 300	175 x 300	185 x 320	185 x 320	185 x 320	200 x 465	200 x 465
Ständerhöhe	K mm	425	425	520	520	520	465	465
Gewicht	kg	ca. 39	ca. 43	ca. 58	ca. 63	ca. 63	ca. 55	ca. 59

Extras (siehe Seite 7)	Bei Bestellung bitte angeben.							
Druckpunktfeineinstellung	DP	DP	DP	DP	DP	DP	DP	DP
Hubsicherung	HS	HS	HS	HS	HS	HS	HS	HS
Zähler	Z	Z	Z	Z	Z	Z	Z	Z
Tischbohrung 12 ^{H7}	TB	TB	TB	TB	TB	TB	TB	TB

Die Extras



APZ-Serie, L-APZ Serie mit extra großer Arbeitshöhe

ips Zahnstangenpressen vermitteln ihre Druckkraft konstant über die gesamte Hublänge. Die direkte Kraftübertragung über den Handhebel erlaubt feinfühliges Arbeiten.



Zahnstangenpressen werden deshalb dort eingesetzt, wo ein konstanter Kraftverlauf über einen längeren Hub benötigt wird.

Handhebel mit ergonomischem Bedienerkomfort

- 360° drehbar: Anpassung auf jede Körpergröße und Anwendung.
- Seitlich abgewinkelter Hebel: freier Blick auf Arbeitsbereich und ergonomisch angenehme Position.
- **R/L Version:** Einfaches und schnelles Umrüsten für Linkshänder ohne dass die Werkzeugeinstellung verloren geht. Ideal bei Jobsharing an einer Presse.




Handhebel umsteckbar für Links- oder Rechtshänder

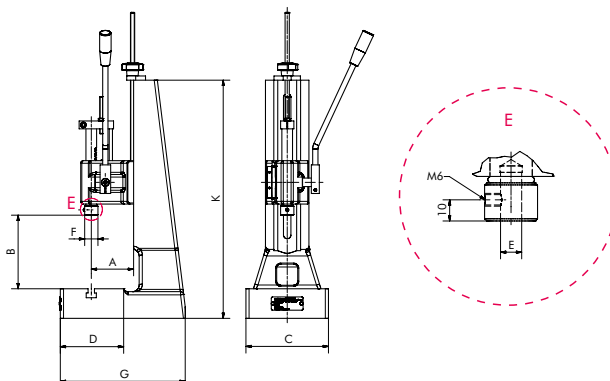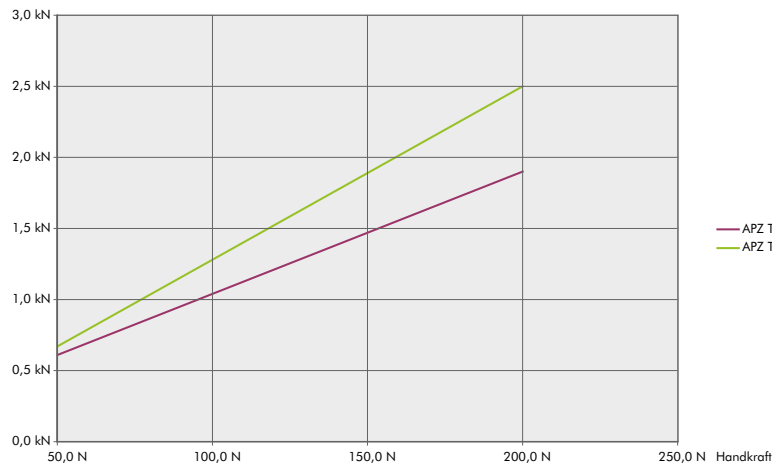




APZ T 1-40

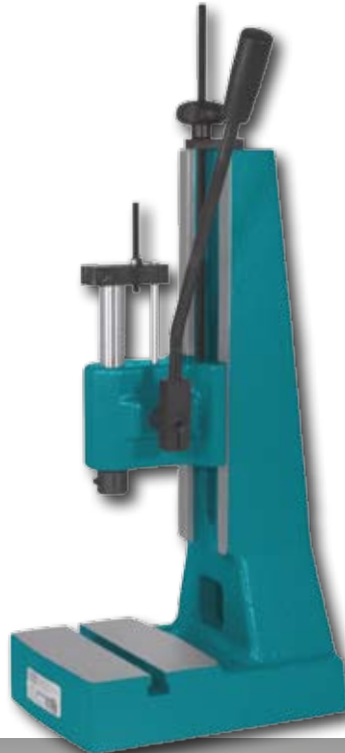

APZ T 2-50

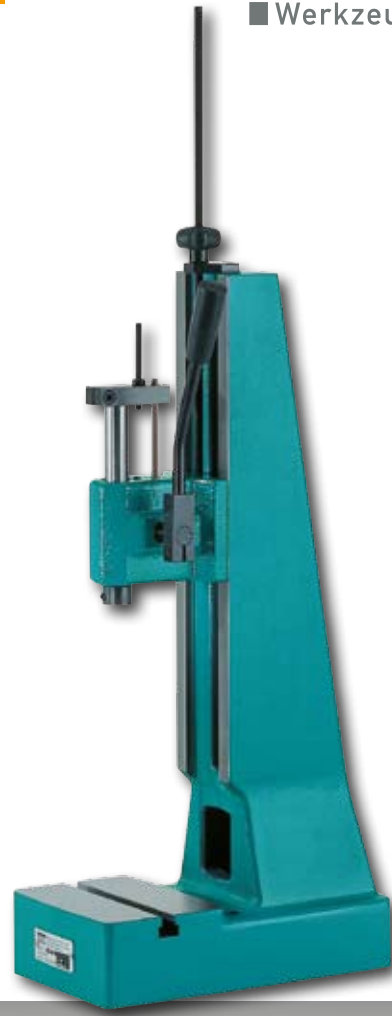





L-APZ T 2-50

Typ			APZ T1-40	APZ T1-90	APZ T2-50	APZ T2-100	L-APZ T2-50	L-APZ T2-100
Druckkraft		kN	1,5	1,5	2,5	2,5	2,5	2,5
Arbeitshub		mm	40	90	50	100	50	100
Ausladung	A	mm	63	63	80	80	80	80
Arbeitshöhe	B	mm	40 - 235	40 - 235	42 - 290	42 - 290	55 - 390	55 - 390
Tischgröße	CxD	mm	110 x 65	110 x 65	157 x 115	157 x 115	157 x 115	157 x 115
Nutbreite ähnlich DIN 650		mm	10	10	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößel Ø	F	mm	25	25	25	25	25	25
Platzbedarf	CxG	mm	110 x 164	110 x 164	157 x 237	157 x 237	155 x 280	155 x 280
Ständerhöhe	K	mm	355	355	450	450	570	570
Gewicht		kg	ca. 8,5	ca. 8,5	ca. 21	ca. 21	ca. 29	ca. 29

Extras (siehe Seite 7)		Bei Bestellung bitte angeben.					
Hubsicherung		HS	HS	HS	HS	HS	HS
Mikrometer		MICRO	MICRO	MICRO	MICRO	MICRO	MICRO
Zähler		Z	Z	Z	Z	Z	Z
Tischbohrung 12 ^{H7}		TB	TB	TB	TB	TB	TB
Links-/Rechtshänder Version*		R/L	R/L	R/L	R/L	R/L	R/L

* Nur mit den Extras MICRO und Z kombinierbar

Die Extras



VZ-Serie, L-VZ Serie mit extra großer Arbeitshöhe

Der Vierkantstößel hat entscheidende Vorteile gegenüber dem Rundstößel:

- Absolute Verdrehsicherheit
- Spielfreie Führung des Pressenstößels
- Nachstellbare Führungsleisten des Vierkantstößels
- Große Auflagefläche für das Werkzeug
- Deshalb sind Führungen im Werkzeug meist unnötig
- Praktisch wartungsfreier Betrieb



ips Zahnstangenpressen mit Vierkantstößel sind ideale Werkzeuge für die Fertigung präziser Kleinteile mit engen Toleranzen in kleineren und mittleren Serien, bei denen eine Automation zu kostenintensiv ist.


Handhebel mit ergonomischem Bedienerkomfort

- 360° drehbar: Anpassung auf jede Körpergröße und Anwendung.
- Seitlich abgewinkelter Hebel: freier Blick auf Arbeitsbereich und ergonomisch angenehme Position.
- **R/L Version:** Einfaches und schnelles Umrüsten für Linkshänder ohne dass die Werkzeugeinstellung verloren geht. Ideal bei Jobsharing an einer Presse.




Handhebel umsteckbar für Links- oder Rechtshänder

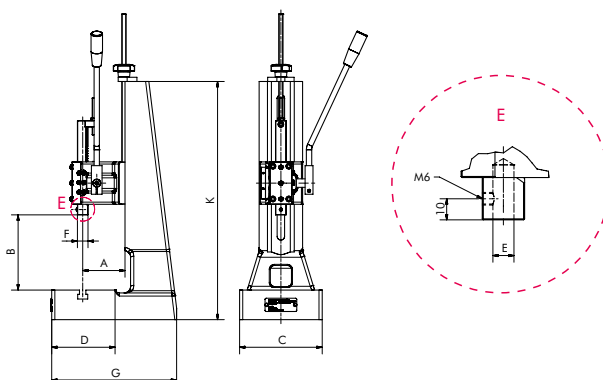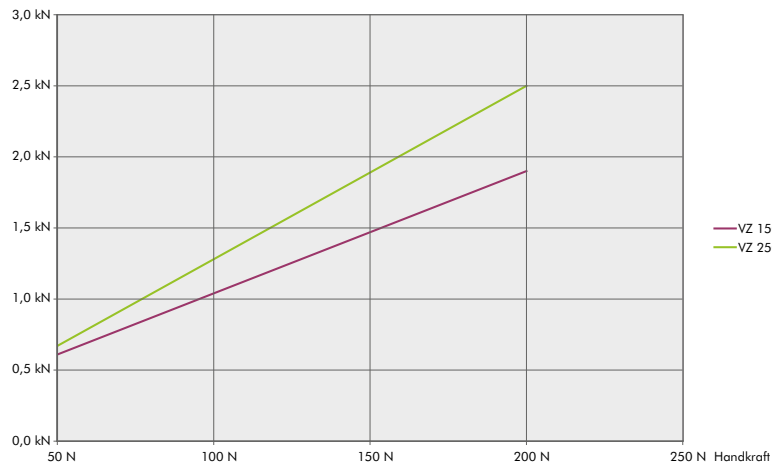

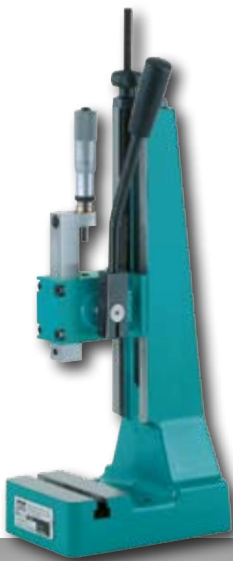


VZ 150-40

mit Extra
Micro

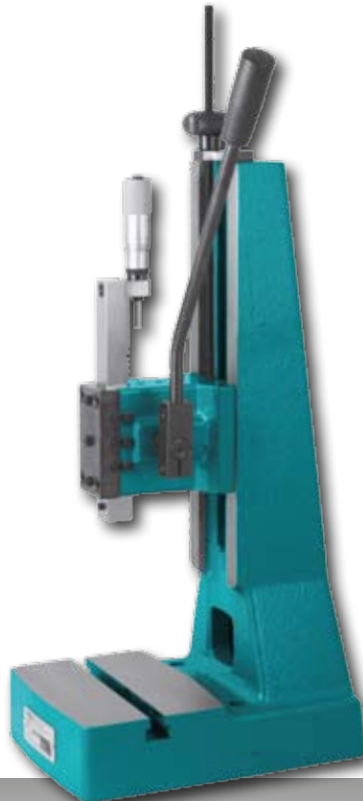

VZ 250-50

mit Extra
Micro

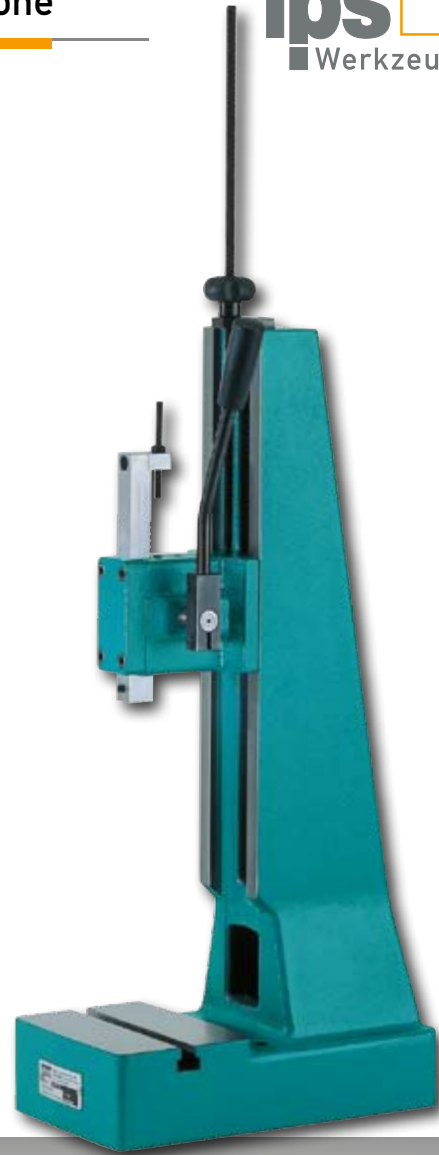






L-VZ 250-50

Typ			VZ 150-40	VZ 150-90	VZ 250-50	VZ 250-100	L-VZ 250-50	L-VZ 250-100
Druckkraft		kN	1,5	1,5	2,5	2,5	2,5	2,5
Arbeitshub		mm	40	90	50	100	50	100
Ausladung	A	mm	63	63	80	80	80	80
Arbeitshöhe	B	mm	35 - 235	35 - 235	42 - 290	42 - 290	55 - 390	55 - 390
Tischgröße	CxD	mm	110 x 65	110 x 65	157 x 115	157 x 115	157 x 115	157 x 115
Nutbreite ähnlich DIN 650		mm	10	10	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößelfläche	F	mm	20 x 20	20 x 20	20 x 20	20 x 20	20 x 20	20 x 20
Platzbedarf	CxG	mm	110 x 164	110 x 164	157 x 237	157 x 237	155 x 280	155 x 280
Ständerhöhe	K	mm	355	355	450	450	570	570
Gewicht		kg	ca. 8,5	ca. 8,5	ca. 21	ca. 21	ca. 29	ca. 29

Extras (siehe Seite 7)		Bei Bestellung bitte angeben.					
Hubsicherung		HS	HS	HS	HS	HS	HS
Mikrometer		MICRO	MICRO	MICRO	MICRO	MICRO	MICRO
Zähler		Z	Z	Z	Z	Z	Z
Tischbohrung 12 ^{H7}		TB	TB	TB	TB	TB	TB
Links-/Rechtshänder Version*		R/L	R/L	R/L	R/L	R/L	R/L

* Nur mit den Extras MICRO und Z kombinierbar

Die Extras



Kniehebel-Druckluftpressen APK*L und VKL Serie

Die optimalen Übersetzungsverhältnisse des Kniehebels erzeugen große Kräfte am Hubende und sichern einen geringen Luftverbrauch. Der somit geringe Energieverbrauch macht ips Kniehebel-Druckluftpressen nicht nur in der Anschaffung, sondern auch langfristig zu einem kostengünstigen Produktionsmittel.



Alle Kniehebel-Druckluftpressen sind mit den ips Standardsteuerungen des MPS-1 Typs oder mit Steuerungen nach Kundenspezifikation lieferbar.




Vierkantstößel


Weitere Qualitätsmerkmale:

- Werkseitig voreingestellter Druckpunkt
- Winkelgetriebe zur einfachen Höhenverstellung des Pressenkopfs
- Seitlich angebrachtes Maßband zum schnellen Reproduzieren von Einstellungen bei Werkzeugwechsel
- Praktisch wartungsfreie doppelwirkende Zylinder
- Geräuscharm: unter 75 dB

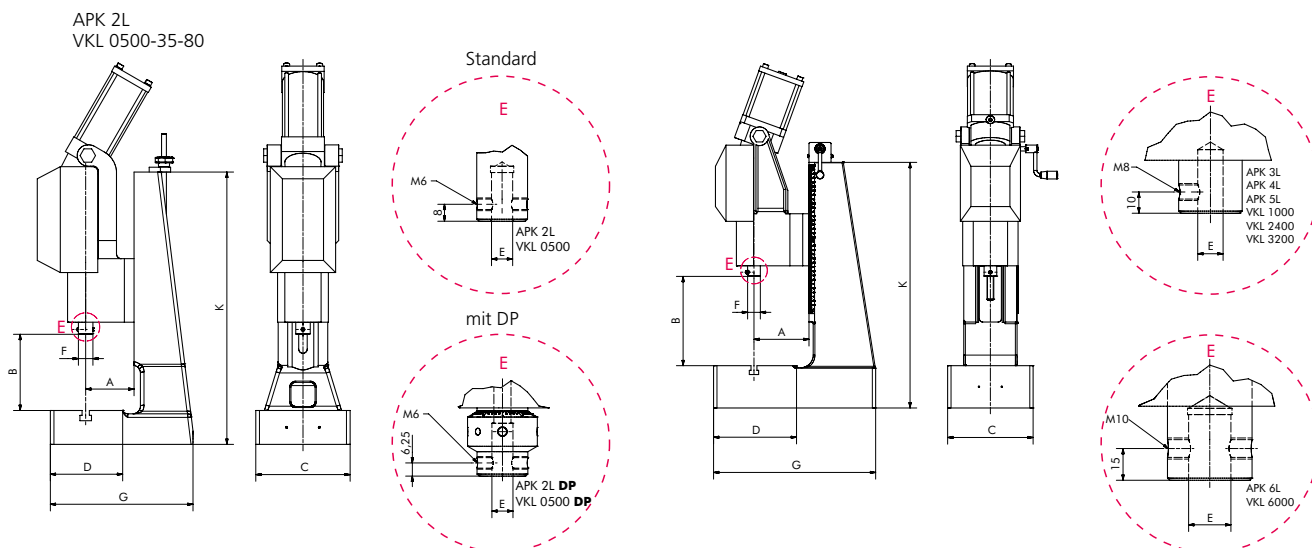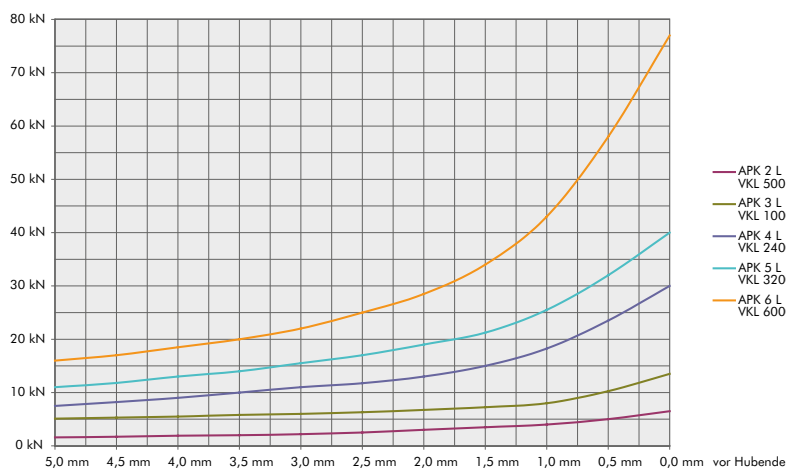


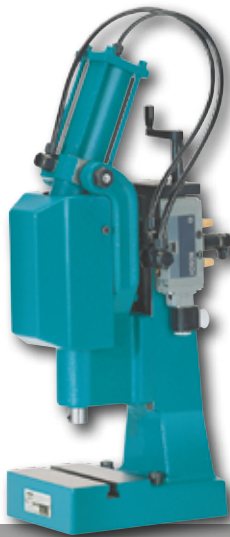

APK 2L

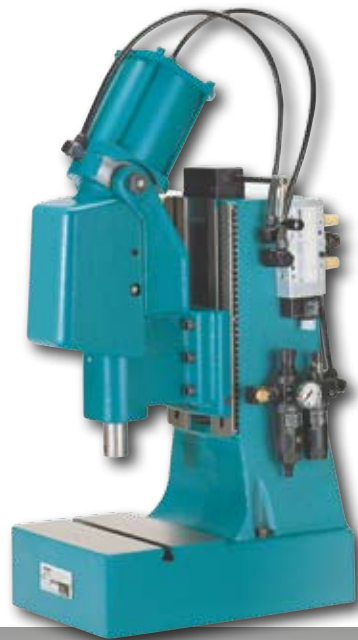

APK 6L

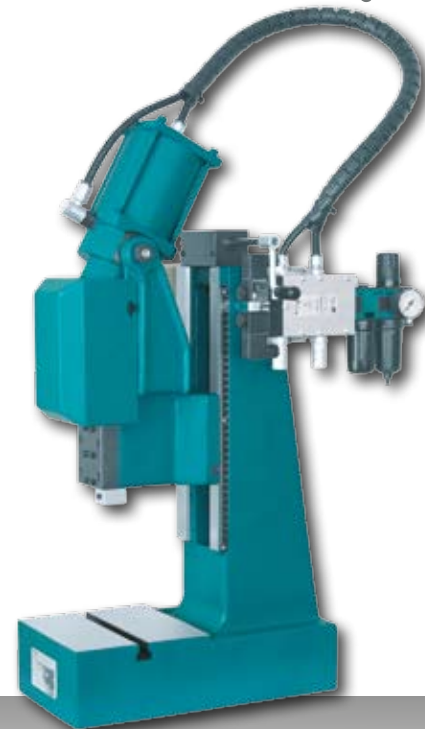

VKL 2400

Typ			mit Rundstößel				
			APK 2 L	APK 3 L	APK 4 L	APK 5 L	APK 6 L
Druckkraft		kN	5	10	24	32	60
Arbeitshub		mm	35	40	40	40	40
Ausladung	A	mm	80	100	130	130	150
Arbeitshöhe	B	mm	80 - 265	110 - 280	175 - 330	175 - 330	87 - 310
Arbeitshöhe mit DP	B	mm	65 - 250	-	-	-	-
Tischgröße	CxD	mm	157 - 115	185 - 145	200 x 190	200 x 190	300 x 210
Nutbreite ähnlich DIN 650		mm	12	12	14	14	14
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	12 ^{H7} x 30	12 ^{H7} x 30	12 ^{H7} x 30	20 ^{H7} x 34
Stößel Ø	F	mm	24	30	30	30	40
Luftanschluss			G 1/4"	G 1/4"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	0,26	0,41	1,05	1,05	1,65
Platzbedarf	CxG	mm	157 x 237	185 x 320	200 x 385	200 x 385	300 x 455
Ständerhöhe	K	mm	450	520	580	580	630
Gewicht		kg	ca. 22	ca. 55	ca. 95	ca. 96	ca. 140





Extras (siehe Seite 5)		Bei Bestellung bitte angeben.				
Druckpunktfeineinstellung		DP	DP	-	-	-

Typ			mit Vierkantstößel				
			VKL 0500-35-80	VKL 1000-40-100	VKL 2400-40-130	VKL 3200-40-130	VKL 6000-40-150
Druckkraft		kN	5	10	24	32	60
Arbeitshub		mm	35	40	40	40	40
Ausladung	A	mm	80	100	130	130	150
Arbeitshöhe	B	mm	80 - 265	110 - 280	175 - 330	175 - 330	90 - 320
Arbeitshöhe mit DP	B	mm	65 - 250	-	-	-	-
Tischgröße	CxD	mm	157 x 115	185 x 145	200 x 190	200 x 190	300 x 210
Nutbreite ähnlich DIN 650		mm	12	12	14	14	14
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	12 ^{H7} x 30	12 ^{H7} x 30	12 ^{H7} x 30	20 ^{H7} x 34
Stößelfläche	F	mm	25 x 25	31 x 31	31 x 31	31 x 31	41 x 41
Luftanschluss			G 1/4"	G 1/4"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	0,26	0,41	1,05	1,05	1,65
Platzbedarf	CxG	mm	157 x 237	185 x 320	200 x 385	200 x 385	300 x 455
Ständerhöhe	K	mm	450	520	580	580	630
Gewicht		kg	ca. 22	ca. 55	ca. 95	ca. 96	ca. 140

Extras (siehe Seite 5)		Bei Bestellung bitte angeben.				
Druckpunktfeineinstellung		DP	DP	-	-	-

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.

Die Extras



Kniehebel-Druckluftpressen XL-APK*L und XL-VKL Serie

Pressen mit XL Ausladung sind dafür konstruiert, große und sperrige Teile zu verarbeiten. Der Pressenständer besteht aus einer stabilen Schweißkonstruktion, die an Kundenwünsche angepasst werden kann.



XL-Kniehebel-Druckluftpressen sind mit den ips Standardsteuerungen des MPS-1 Typs oder mit Steuerungen nach Kundenspezifikation lieferbar.



Vierkantstößel

Weitere Qualitätsmerkmale:

- Werkseitig voreingestellter Druckpunkt
- Winkelgetriebe zur einfachen Höhenverstellung des Pressenkopfs
- Seitlich angebrachtes Maßband zum schnellen Reproduzieren von Einstellungen bei Werkzeugwechsel
- Praktisch wartungsfreie doppelwirkende Zylinder
- Geräuscharm: unter 75 dB

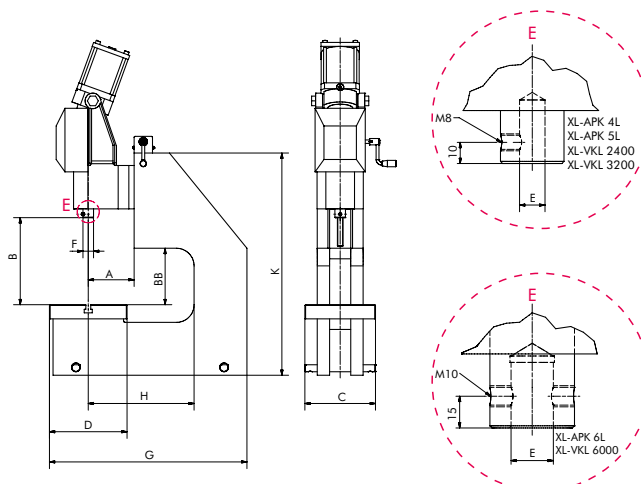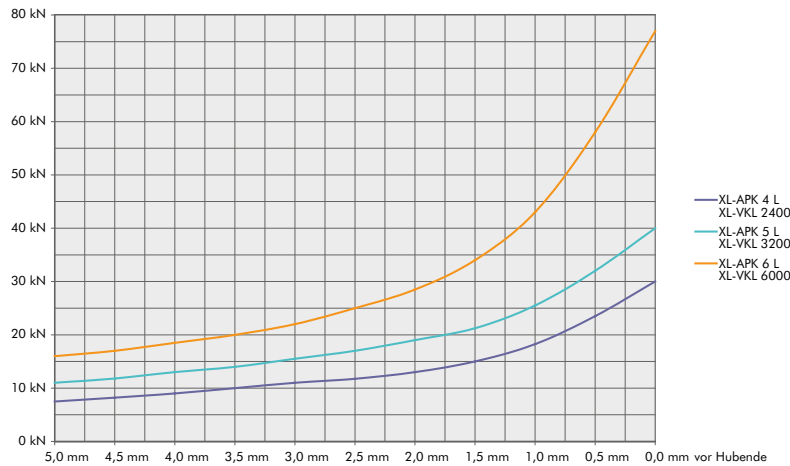

XL-APK Serie mit Rundstößel mit 300 mm Ausladung

XL-VKL Serie mit Vierkantstößel mit 300 mm Ausladung




XL-APK 4L

Typ	mit Rundstößel					mit Vierkantstößel		
			XL-APK 4 L	XL-APK 5 L	XL-APK 6 L	XL-VKL 2400-40-300	XL-VKL 3200-40-300	XL-VKL 6000-40-300
Druckkraft		kN	24	32	60	24	32	60
Arbeitshub		mm	40	40	40	40	40	40
Ausladung	A	mm	130	130	150	130	130	150
Ausladung C-Gestell	H	mm	300	300	300	300	300	300
Arbeitshöhe	B	mm	130 - 280	130 - 280	130 - 230	130 - 280	130 - 280	130 - 230
Arbeitshöhe C-Gestell	BB	mm	158	158	190	158	158	190
Tischgröße	CxD	mm	200 x 220	200 x 220	310 x 220	200 x 220	200 x 220	310 x 220
Nutbreite ähnlich DIN 650		mm	14	14	16	14	14	16
Stößelbohrung Ø x Tiefe	E	mm	12 ^{H7} x 30	12 ^{H7} x 30	20 ^{H7} x 34	12 ^{H7} x 30	12 ^{H7} x 30	20 ^{H7} x 34
Stößel Ø / Stößelfläche	F	mm	30	30	40	31 x 31	31 x 31	41 x 41
Luftanschluss			G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G3/8"
Luftverbrauch/cm Zyl. Hub		l	1,05	1,05	1,65	1,05	1,05	1,65
Platzbedarf	CxG	mm	200 x 560	200 x 560	320 x 610	200 x 560	200 x 560	320 x 610
Ständerhöhe	K	mm	630	630	630	630	630	630
Gewicht		kg	ca. 149	ca. 150	ca. 250	ca. 149	ca. 150	ca. 250

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.

Die Extras



Handunterstützte Kniehebel-Druckluftpressen mit Vierkantstößel

Handunterstützte Kniehebelpressen kommen zum Einsatz, wenn bedingt durch die Besonderheit des Werkstücks anfangs nicht beide Hände durch eine Zweihandbedienung gebunden sein können und doch eine große Druckkraft am Ende des Arbeitshubs erreicht werden soll.

Mit den NP handunterstützten Druckluft-Kniehebelpressen kann hier sicher gearbeitet werden: Der Stößel wird über den Handhebel nach unten in die Krafthubposition gebracht und das Werkstück dann über die Handhebelkraft gehalten. Ein Sensor registriert diese Lage. Gleichzeitig kann das Werkstück losgelassen werden und mit der zweiten Hand ein Drucktaster gedrückt werden, der dann den Krafthub auslöst.

Der Krafthub kann nur ausgelöst werden, wenn beide Hände gebunden sind. So wird z.B. beim Loslassen des Handhebels der Stößel durch eine Sicherheitsmechanik angehoben und damit die Teilfreigabe für den Krafthub in der Steuerung zurückgenommen.

Die Länge des pneumatischen Krafthubs der NP handunterstützten Druckluft-Kniehebelpressen und somit die UT Position lässt sich über die serienmäßige Feineinstellung hochpräzise und stufenlos von 0 mm - 6 mm Hublänge einstellen.



Wegen des speziellen Übersetzungsmechanismus steht der Krafthub konstant über die gesamte eingestellte Krafthublänge zur Verfügung.




Feineinstellung des pneumatischen Krafthubs




Gesamtaufbau

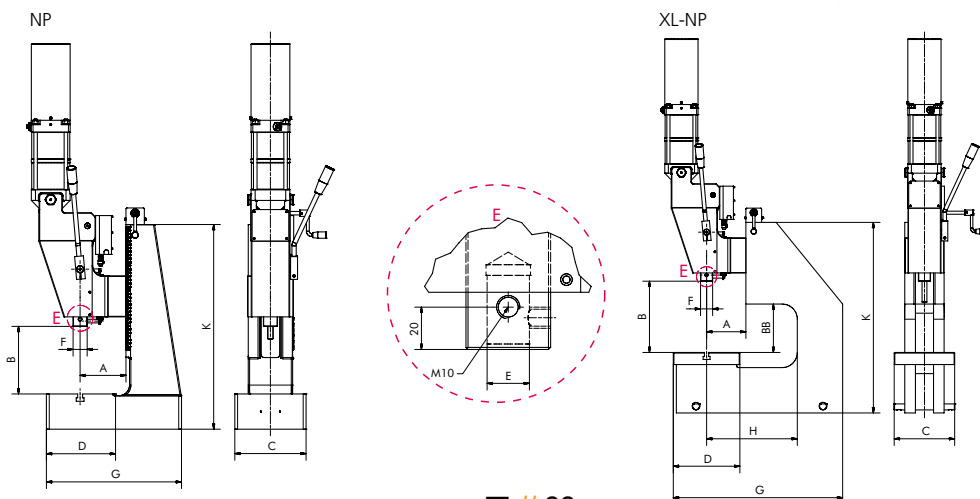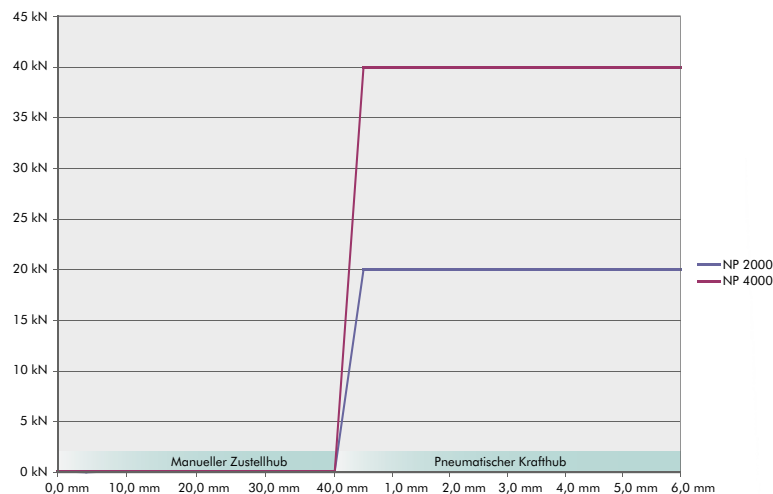

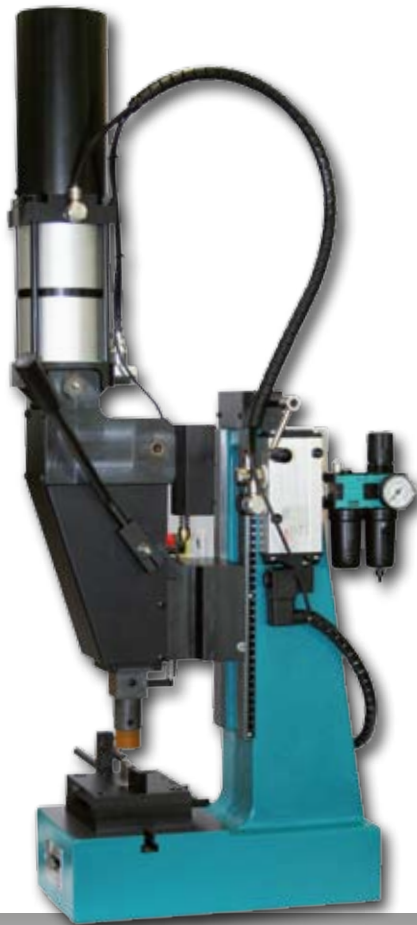

NP 4000

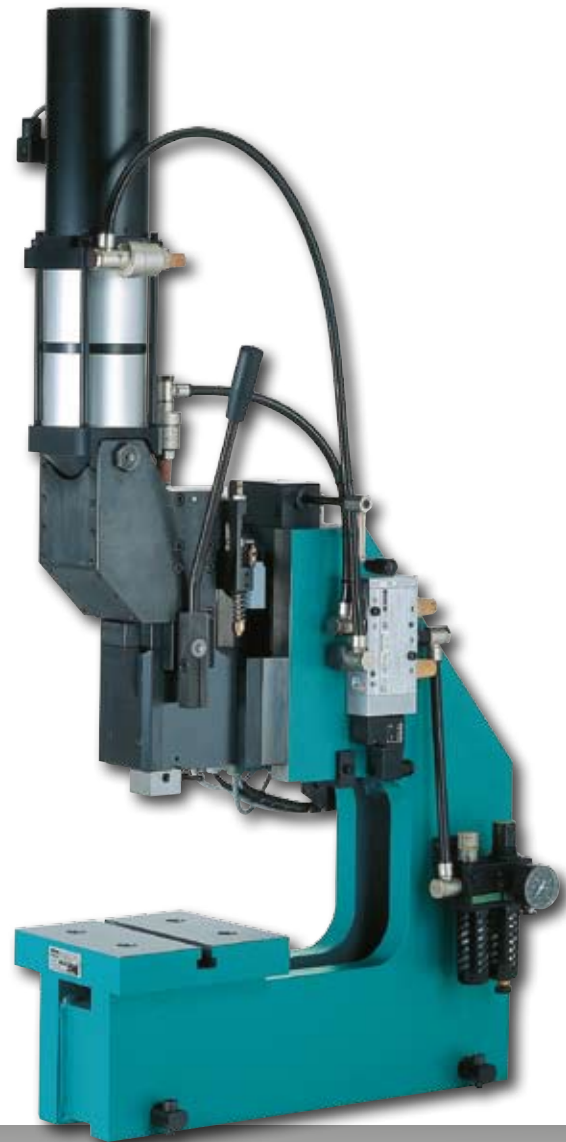

XL-NP 4000

mit Profilschienen Stanzwerkzeug

Typ			NP 2000	NP 4000	XL-NP 2000	XL-NP 4000
Druckkraft		kN	20	40	20	40
manueller Zustellhub		mm	40	40	40	40
pneumatischer Krafthub		mm	0 - 6	0 - 6	0 - 6	0 - 6
Ausladung	A	mm	130	130	130	130
Ausladung C-Gestell	H	mm	-	-	300	300
Arbeitshöhe	B	mm	58 - 325	58 - 325	125 - 265	125 - 265
Arbeitshöhe C-Gestell	BB	mm	-	-	158	158
Tischgröße	CxD	mm	200 x 190	200 x 190	200 x 220	200 x 220
Nutbreite ähnlich DIN 650		mm	14	14	14	14
Stößelbohrung Ø x Tiefe	E	mm	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25
Stößelfläche	F	mm	40 x 40	40 x 40	40 x 40	40 x 40
Luftanschluss			G 3/8"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	0,5	0,75	0,5	0,75
Platzbedarf	CxG	mm	200 x 385	200 x 385	200 x 560	200 x 560
Ständerhöhe	K	mm	580	580	630	630
Gewicht		kg	ca. 95	ca. 96	ca. 135	ca. 136

DA-Serie

DA Pressen sind die konsequente Umsetzung moderner Pressentechnik für direktwirkende Druckluftpressen. Durch ihren modularen Aufbau können genau die für den Anwendungsfall benötigten Baumaße ausgewählt werden. Das Preis/Leistungsverhältnis wird so optimiert. Standard Hublängen von 40 mm bis 120 mm stehen in 20 mm Stufung zur Verfügung. Sonderlängen sind auf Anfrage lieferbar.


Direktwirkende Druckluftpressen erzeugen ihre Kraft konstant über die gesamte Hublänge. Alle direktwirkenden Druckluftpressen sind sowohl als Automationsbaustein oder mit **ips** Steuerungen für Einzelarbeitsplätze lieferbar.


Die Bearbeitung von Blechen, Leiterplatten oder anderen sperrigen Teilen verlangt eine größere Ausladung der Pressen. XL-DA Pressen mit 250 mm und 300 mm Ausladung ermöglichen die Bearbeitung auch dieser Werkstücke. Bei hohen Teilen, die mehr Raum nach oben verlangen, werden L-DA Pressen mit bis zu 350 mm Arbeitshöhe eingesetzt. Für Maße, die außerhalb des Standards liegen, können Pressen mit Ständern in Schweißkonstruktion nach Ihren Vorgaben gefertigt werden.

DA Pressen sind praktisch wartungsfrei, da alle beweglichen Teile gelagert sind. Die Zylinder sind vorgefettet und deshalb für ölfreien Betrieb geeignet.

Qualitätsmerkmale:

- Verdrehgesicherter, hartverchromter in Teflonbuchsen geführter Stößel
- Einfache Höhenverstellung des Pressenkopfs über eine Gewindespindel und Winkelgetriebe
- Seitlich angebrachtes Maßband zum schnellen Reproduzieren von Einstellungen bei Werkzeugwechsel
- Praktisch wartungsfreie doppelwirkende Zylinder
- Zustellbare Endlagendämpfung des Zylinders
- Geräuscharm: unter 75 dB

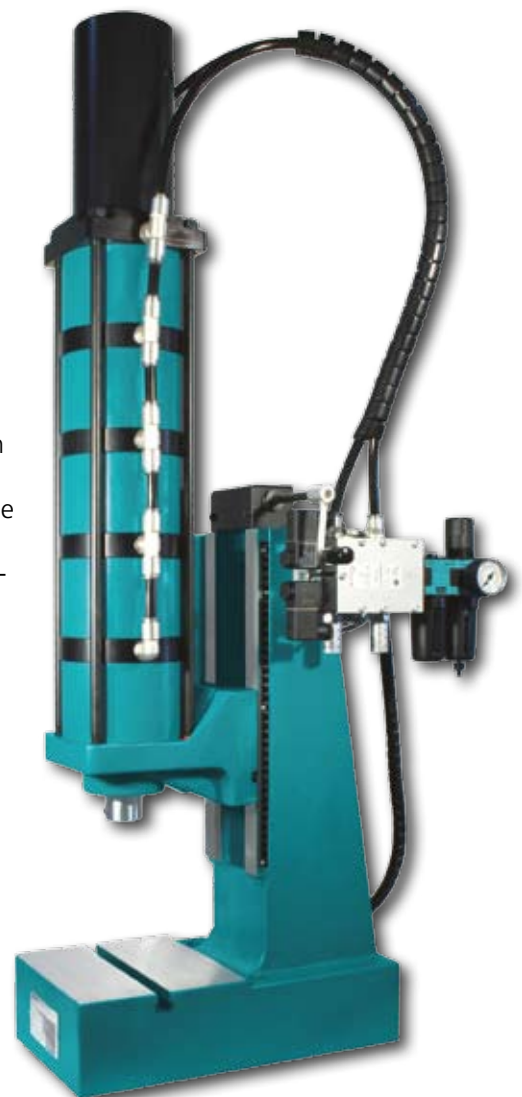

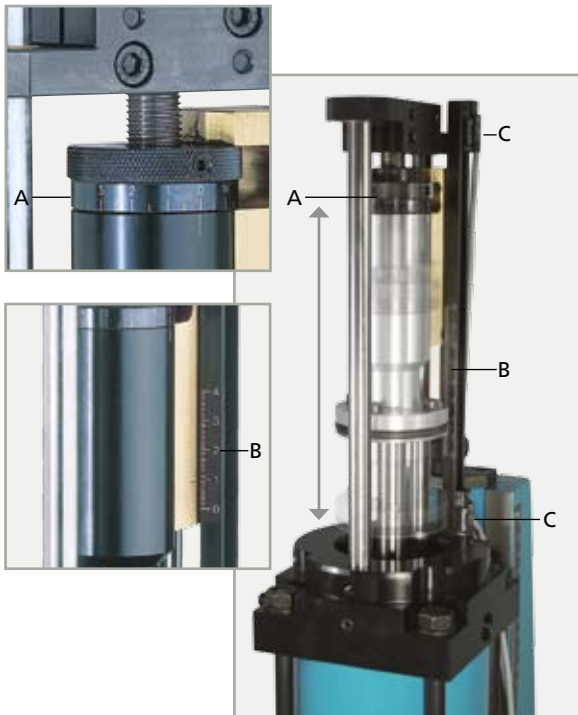


Sensoren sind nicht im Lieferumfang enthalten

Hubeinstellung bei DA Pressen

DA Pressen sind serienmäßig mit einem innovativen, präzisen und leicht zu handhabenden System ausgestattet, das genaue Hubeinstellungen ermöglicht und den Stößel gegen Verdrehen sichert.

Funktion:







- Die Einpresstiefe kann auf 0,05 mm Ablesegenauigkeit über die gesamte Hublänge mit nur einer Skalenmutter (A) eingestellt werden. Die Hublänge lässt sich über die seitliche Skala (B) und den Nonius auf der Skalenmutter (A) ablesen.
- Die Positionsabfrage des Stößels ist mit Reed-Kontakten (C) möglich, die auf die serienmäßige Skala aufgeschoben werden.
- Die Sensoren müssen bei einer Hublängenverstellung nicht neu eingestellt werden, da die Magnete der Hublängenregulierung immer in die gleichen Endlagen fahren.

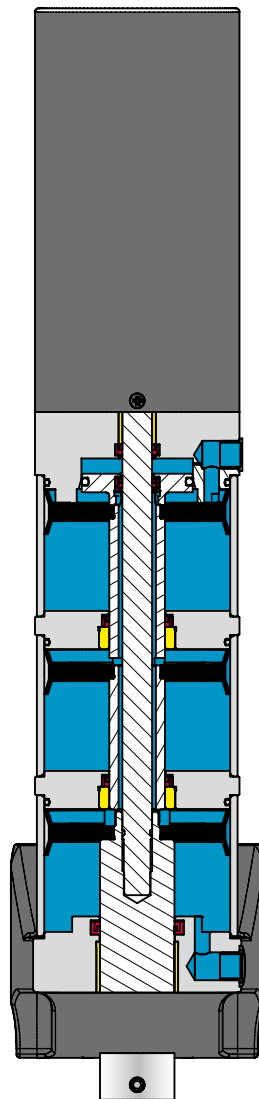

Tandemzylinder


Für größere Kräfte wird die energiegünstige Tandemzylinder-Bauweise eingesetzt. Mehrere Pneumatikzylinder werden hintereinander geschaltet und so die Kraft des Zylinders entsprechend vervielfacht. Der Luftverbrauch wird optimiert, weil der Rückhub nur über eine Zylinderkammer erfolgt. Da die Luftführung innerhalb des Pneumatik-Zylinders stattfindet, kann die Presse nur über zwei Luftanschlüsse betrieben werden.

Die Extras

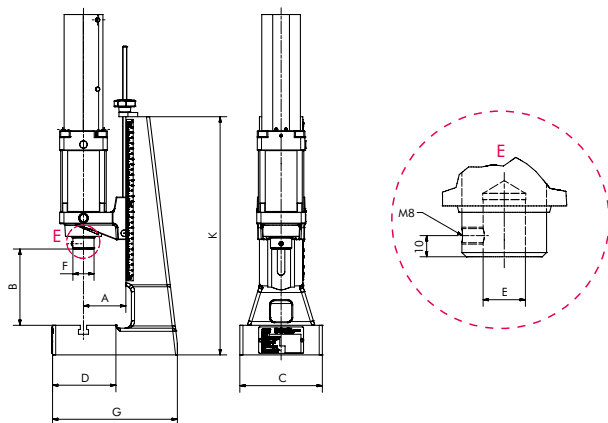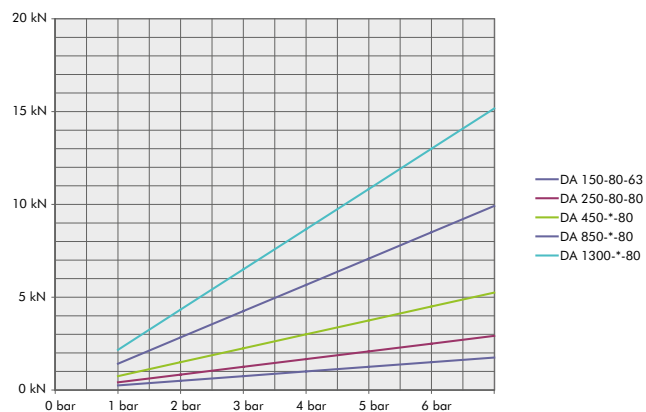


DA Serie mit Rundstößel

L-DA Serie mit Rundstößel, Arbeitshöhe bis 350 mm

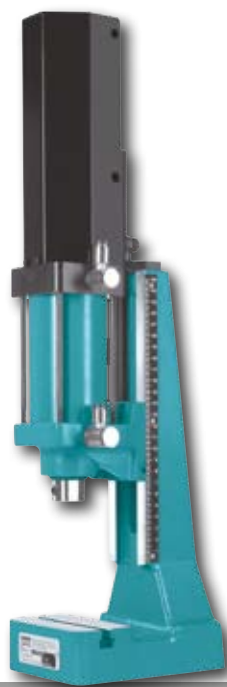

DA 150-80-63

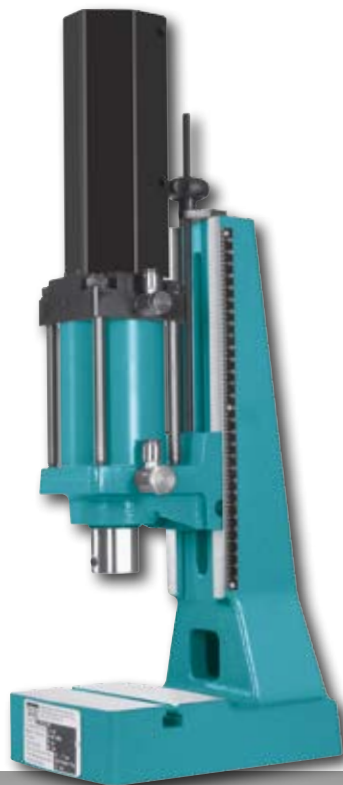

DA 250-80-80



L-DA 1300-40-80








Typ			DA 150-80-63	DA 250-80-80	L-DA 250-80-80	DA 450-*-80	L-DA 450-*-80	DA 850-*-80	L-DA 850-*-80	L-DA 1300-*-80
Druckkraft		kN	1,5	2,5	2,5	4,5	4,5	8,5	8,5	13
Arbeitshub*		mm	80	80	80	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120
Ausladung	A	mm	63	80	80	80	80	80	80	80
Arbeitshöhe	B	mm	40 - 215	70 - 280	65 - 390	58 - 243	65 - 350	58 - 243	65 - 350	65 - 350
Tischgröße	CxD	mm	100 x 65	157 x 115	157 x 115	157 x 115	157 x 115	157 x 115	157 x 115	157 x 115
Nutbreite ähnlich DIN 650		mm	10	12	12	12	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	16 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25
Stößel Ø	F	mm	30	40	40	40	40	40	40	40
Luftanschluss			G 1/4"	G 1/4"	G 1/4"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub	I		0,2	0,3	0,3	1,0	1,0	1,5	1,5	2,1
Platzbedarf	CxG	mm	110 x 164	157 x 237	155 x 280	155 x 237	155 x 280	155 x 237	155 x 280	155 x 280
Ständerhöhe	K	mm	355	450	570	450	570	450	570	570
Gewicht		kg	ca. 11,5	ca. 25	ca. 31	ca. 28	ca. 34	ca. 31	ca. 37	ca. 40

Extras (siehe Seite 5) Bei Bestellung bitte angeben.										
Tischbohrung 12 ^{H7}			TB	TB	TB	TB	TB	TB	TB	TB

* Bei Bestellung Hublänge angeben.

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.

Die Extras

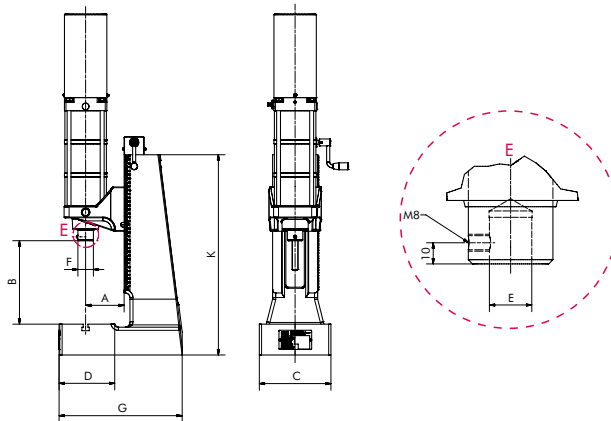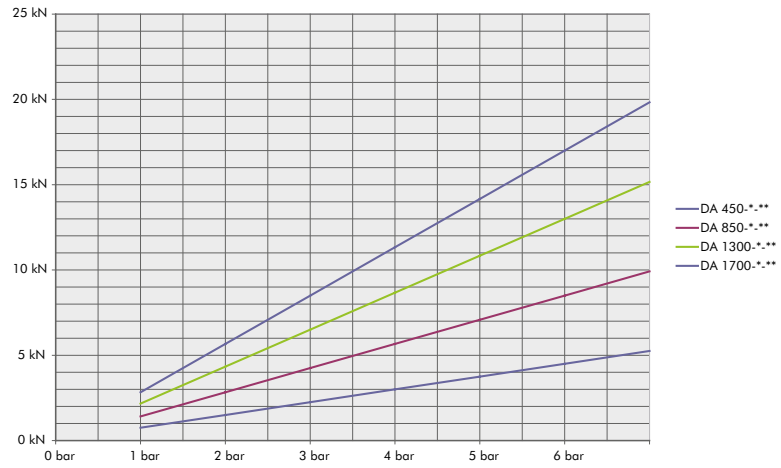



DA 850-40-100










DA 1300-40-130


Typ			DA 450-*-100	DA 850-*-100	DA 1300-*-100	DA 1700-*-100	DA 450-*130	DA 850-*-130	DA 1300-*-130	DA 1700-*-130
Druckkraft		kN	4,5	8,5	13,0	17,0	4,5	8,5	13,0	17,0
Arbeitshub*		mm	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120	40/60/80/ 100/120
Ausladung	A	mm	100	100	100	100	130	130	130	130
Arbeitshöhe	B	mm	60 - 285	60 - 285	60 - 285	60 - 285	70 - 325	70 - 325	70 - 325	70 - 325
Tischgröße	CxD	mm	185 x 145	185 x 145	185 x 145	185 x 145	200 x 190	200 x 190	200 x 190	200 x 190
Nutbreite ähnlich DIN 650		mm	12	12	12	12	14	14	14	14
Stößelbohrung Ø x Tiefe	E	mm	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25
Stößel Ø	F	mm	40	40	40	40	40	40	40	40
Luftanschluss			G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	1,0	1,5	2,1	2,6	1,0	1,5	2,1	2,6
Platzbedarf	CxG	mm	185 x 320	185 x 320	185 x 320	185 x 320	200 x 385	200 x 385	200 x 385	200 x 385
Ständerhöhe	K	mm	520	520	520	520	580	580	580	580
Gewicht		kg	ca. 62	ca. 65	ca. 68	ca. 71	ca. 77	ca. 80	ca. 83	ca. 86

* Bei Bestellung Hublänge angeben.

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.

Die Extras

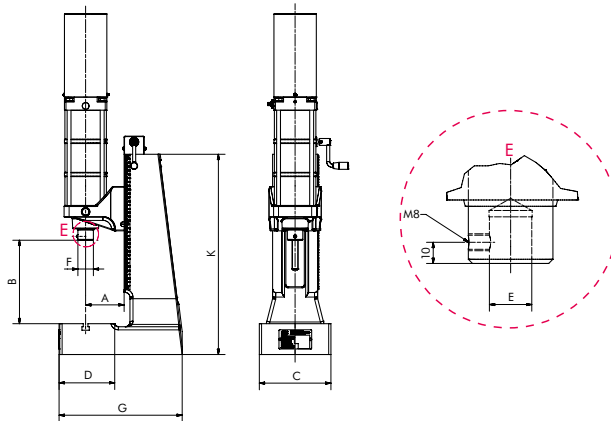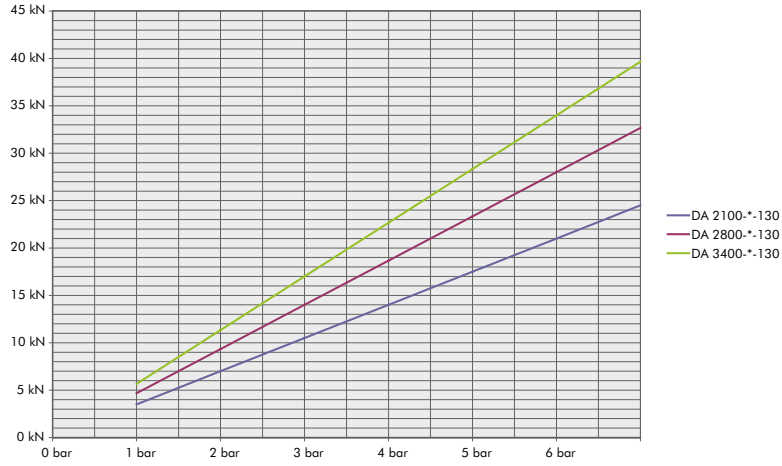

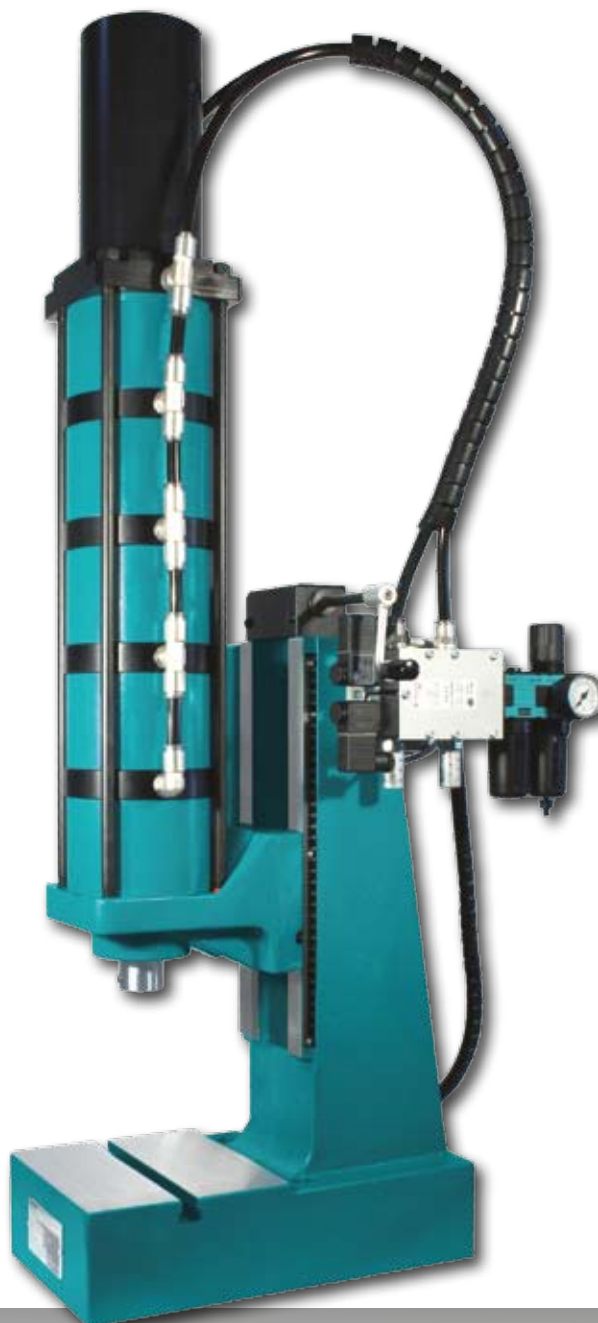








DA 3400-40-130

Typ			DA 2100- *-130	DA 2800- *-130	DA 3400- *-130
Druckkraft		kN	21,0	28,0	34,0
Arbeitshub*		mm	40/60/80/100/120	40/60/80/100/120	40/60/80/100/120
Ausladung	A	mm	130	130	130
Arbeitshöhe	B	mm	75 - 330	75 - 330	75 - 330
Tischgröße	CxD	mm	200 x 190	200 x 190	200 x 190
Nutbreite ähnlich DIN 650		mm	14	14	14
Stößelbohrung Ø x Tiefe	E	mm	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25
Stößel Ø	F	mm	40	40	40
Luftanschluss			G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	3,0	3,7	4,5
Platzbedarf	CxG	mm	200 x 385	200 x 385	200 x 385
Ständerhöhe	K	mm	580	580	580
Gewicht		kg	ca. 92	ca. 99	ca. 105

* Bei Bestellung Hublänge angeben.

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.

Die Extras

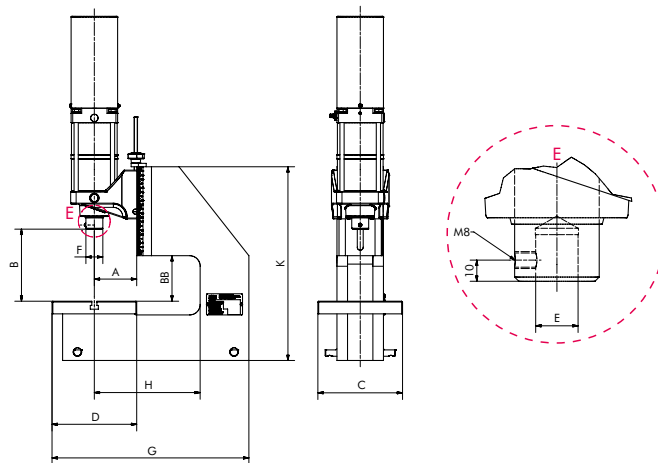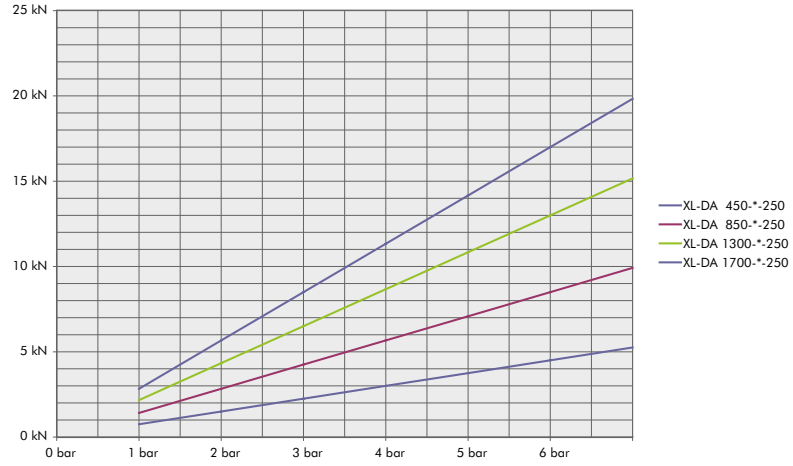



XL – Direktwirkende Druckluftpressen
 DA-Serie mit Rundstößel, mit 250 mm Ausladung








XL-DA 850-40

Typ			XL-DA 450-*-250	XL-DA 850-*-250	XL-DA 1300-*-250	XL-DA 1700-*-250
Druckkraft		kN	4,5	8,5	13,0	17,0
Arbeitshub*		mm	40/60/80/100/120	40/60/80/100/120	40/60/80/100/120	40/60/80/100/120
Ausladung	A	mm	100	100	100	100
Ausladung C-Gestell	H	mm	250	250	250	250
Arbeitshöhe	B	mm	75 - 175	75 - 175	75 - 175	75 - 175
Arbeitshöhe C-Gestell	BB	mm	100	100	100	100
Tischgröße	CxD	mm	200 x 200	200 x 200	200 x 200	200 x 200
Nutbreite ähnlich DIN 650		mm	12	12	12	12
Stößelbohrung Ø x Tiefe	E	mm	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25
Stößel Ø	F	mm	40	40	40	40
Luftanschluss			G 3/8"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	1,0	1,5	2,1	2,6
Platzbedarf	CxG	mm	200 x 465	200 x 465	200 x 465	200 x 465
Ständerhöhe	K	mm	465	465	465	465
Gewicht		kg	ca. 57	ca. 60	ca. 63	ca. 66


* Bei Bestellung Hublänge angeben.

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.


Die Extras

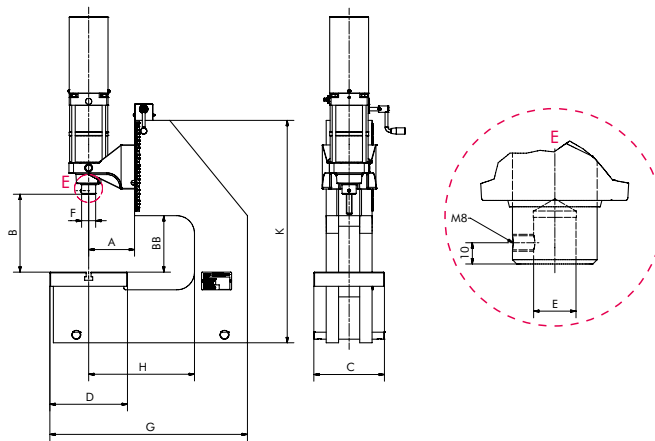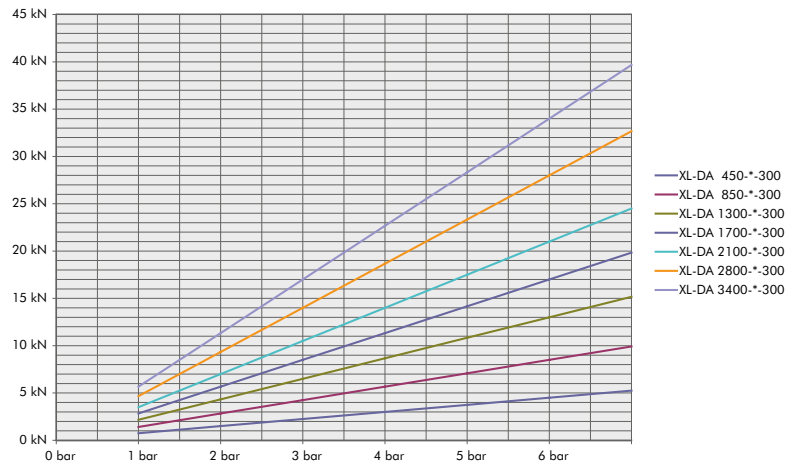

XL- Direktwirkende Druckluftpressen DA-Serie mit Rundstößel, mit 300 mm Ausladung

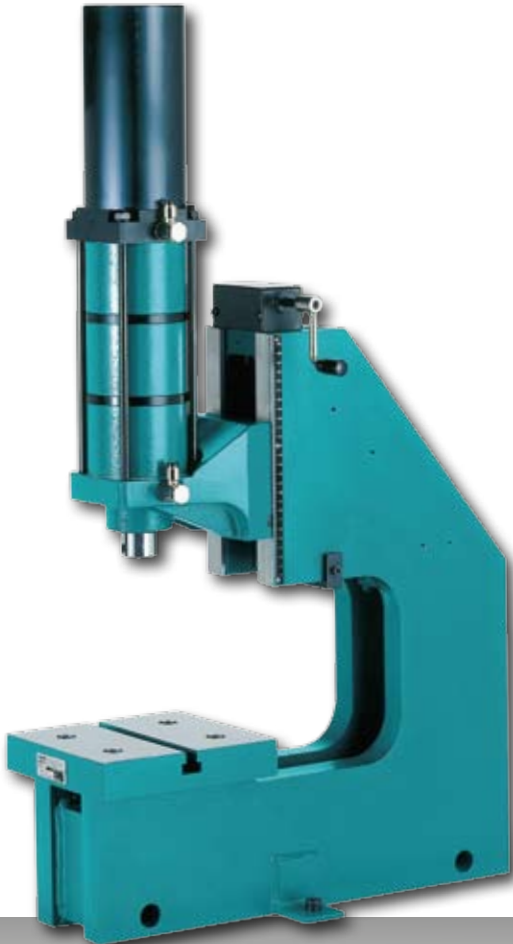

XL-DA 1300-40-300

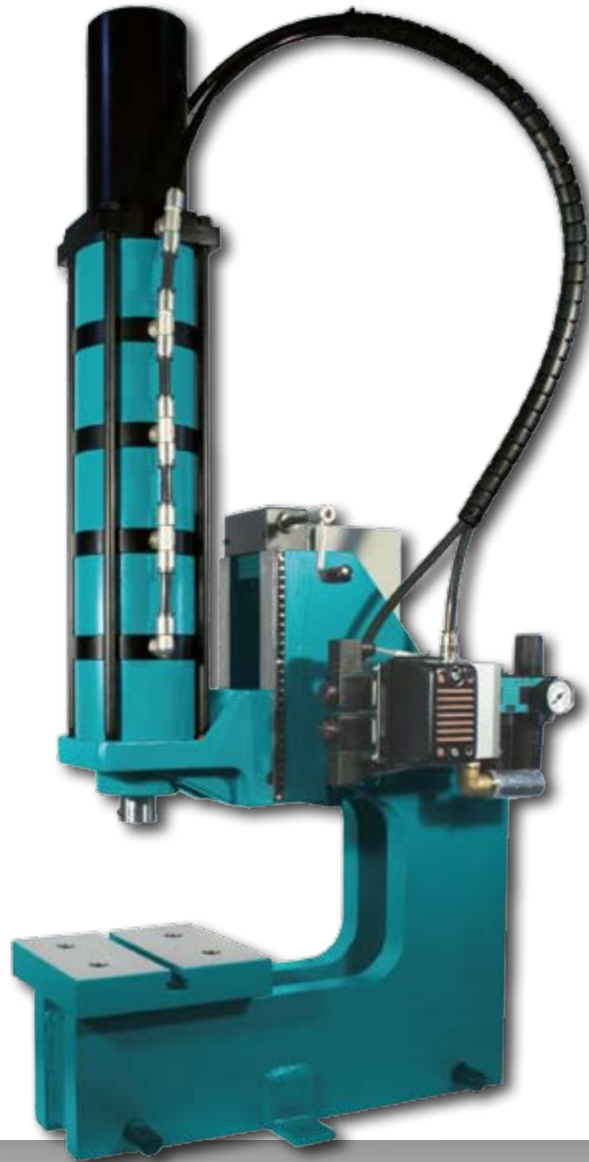


XL-DA 3400-40-300

Typ			XL-DA 450- *-300	XL-DA 850- *-300	XL-DA 1300- *-300	XL-DA 1700- *-300	XL-DA 2100- *-300	XL-DA 2800- *-300	XL-DA 3400- *-300
Druckkraft		kN	4,5	8,5	13,0	17,0	21,0	28,0	34,0
Arbeitshub*		mm	40/60/80/120	40/60/80/120	40/60/80/120	40/60/80/120	40/60/80/120	40/60/80/120	40/60/80/120
Ausladung	A	mm	130	130	130	130	130	130	130
Ausladung C-Gestell	H	mm	300	300	300	300	300	300	300
Arbeitshöhe	B	mm	140 - 175	140 - 175	140 - 175	140 - 175	130 - 275	130 - 275	130 - 275
Arbeitshöhe C-Gestell	BB	mm	158	158	158	158	158	158	158
Tischgröße	CxD	mm	200 x 220	200 x 220	200 x 220	200 x 220	200 x 220	200 x 220	200 x 220
Nutbreite ähnlich DIN 650		mm	14	14	14	14	14	14	14
Stößelbohrung Ø x Tiefe	E	mm	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25	20 ^{H7} x 25
Stößel Ø	F	mm	40	40	40	40	40	40	40
Luftanschluss			G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"
Luftverbrauch/cm Zyl. Hub		l	1,0	1,5	2,1	2,6	3,0	3,7	4,5
Platzbedarf	CxG	mm	200 x 560	200 x 560	200 x 560	200 x 560	200 x 560	200 x 560	200 x 560
Ständerhöhe	K	mm	630	630	630	630	630	630	630
Gewicht		kg	ca. 135	ca. 138	ca. 141	ca. 144	ca. 141	ca. 158	ca. 164

* Bei Bestellung Hublänge angeben.

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.





Die Extras



DAF direktwirkende Pressenzylinder mit Flansch wurden für den flexiblen Einsatz in Sondermaschinen konstruiert.

DAF Pressenzylinder sind mit allen Vorteilen von modernen Druckluftpressen standardmäßig ausgerüstet:

- Stufenlose Einstellung der Hublänge
- Zustellbare Endlagendämpfung
- Aufnahmebohrung für Werkzeuge
- Einfach zu automatisieren

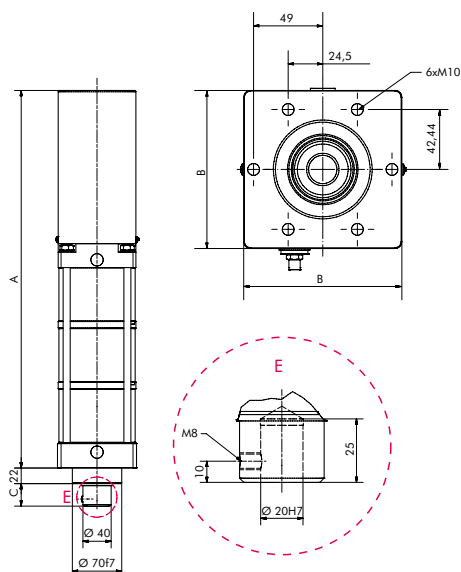
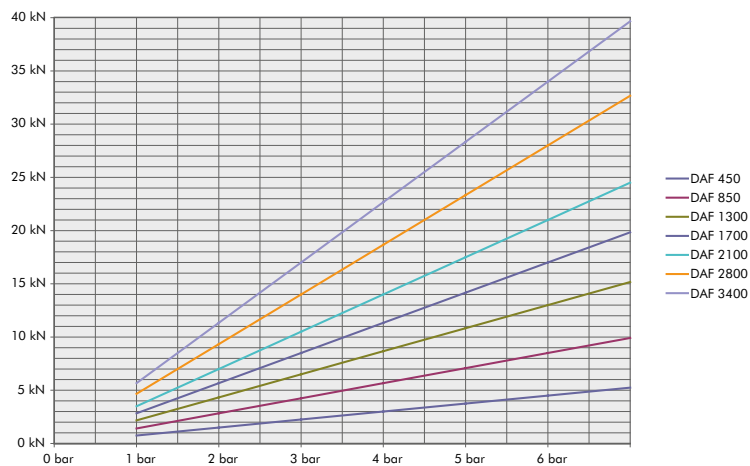






DAF-Zylinder

Typ	Druckkraft kN bei 6 bar	Rückzugskraft kN bei 6 bar	Hub mm	A mm	B mm	C mm
DAF 450-40	4,5	4	0 - 40	363	112	32
DAF 450-60	4,5	4	0 - 60	403	112	32
DAF 450-80	4,5	4	0 - 80	443	112	32
DAF 450-100	4,5	4	0 - 100	483	112	32
DAF 450-120	4,5	4	0 - 120	523	112	32
DAF 850-40	8,5	4	0 - 40	449	112	32
DAF 850-60	8,5	4	0 - 60	509	112	32
DAF 850-80	8,5	4	0 - 80	569	112	32
DAF 850-100	8,5	4	0 - 100	629	112	32
DAF 850-120	8,5	4	0 - 120	689	112	32
DAF 1300-40	13	4	0 - 40	535	112	32
DAF 1300-60	13	4	0 - 60	615	112	32
DAF 1300-80	13	4	0 - 80	695	112	32
DAF 1300-100	13	4	0 - 100	775	112	32
DAF 1300-120	13	4	0 - 120	855	112	32
DAF 1700-40	17	4	0 - 40	621	112	32
DAF 1700-60	17	4	0 - 60	721	112	32
DAF 1700-80	17	4	0 - 80	821	112	32
DAF 1700-100	17	4	0 - 100	921	112	32
DAF 1700-120	17	4	0 - 120	1021	112	32
DAF 2100-40	21	19	0 - 40	581	134	38
DAF 2100-60	21	19	0 - 60	661	134	38
DAF 2100-80	21	19	0 - 80	741	134	38
DAF 2100-100	21	19	0 - 100	821	134	38
DAF 2100-120	21	19	0 - 120	901	134	38
DAF 2800-40	28	26	0 - 40	689	134	38
DAF 2800-60	28	26	0 - 60	789	134	38
DAF 2800-80	28	26	0 - 80	889	134	38
DAF 2800-100	28	26	0 - 100	989	134	38
DAF 2800-120	28	26	0 - 120	1089	134	38
DAF 3400-40	34	32	0 - 40	797	134	38
DAF 3400-60	34	32	0 - 60	917	134	38
DAF 3400-80	34	32	0 - 80	1037	134	38
DAF 3400-100	34	32	0 - 100	1157	134	38
DAF 3400-120	34	32	0 - 120	1277	134	38





Die Extras



MicroPress® ist eine pneumatische Presse für niedere Druckkräfte mit einem stabilen Pressenständer. MicroPress® Typen sind ideal für Füge- und Formanwendungen, bei denen die Bauteile geringen Einpressdruck und präzise Hubtiefe verlangen. Wie zum Beispiel bei Anwendungen in der Medizintechnik, Elektronikfertigung und Feinstmechanik.

Qualitätsmerkmale:

- Vierkantstößel
- Präzisionsführung des Stößels
- Einstellbare Hublänge
- Höhenverstellbarer Pressenkopf
- Praktisch wartungsfreier Zylinder
- Geräuscharm

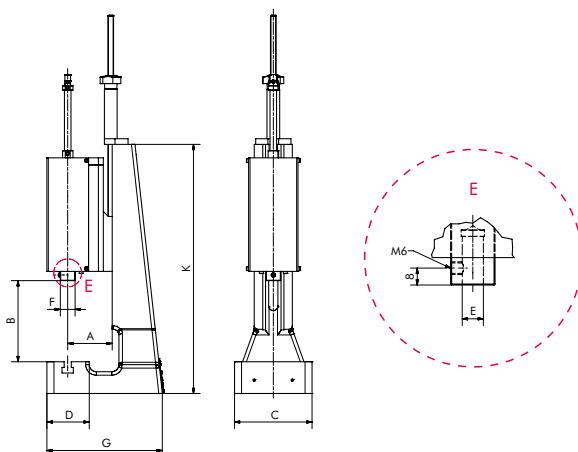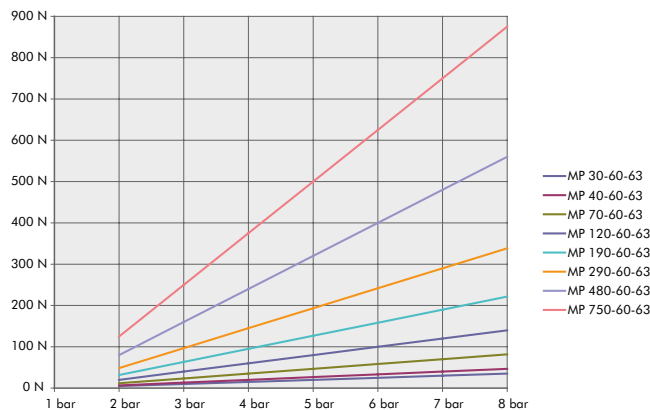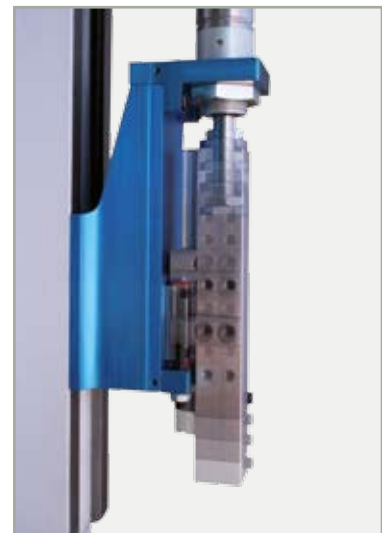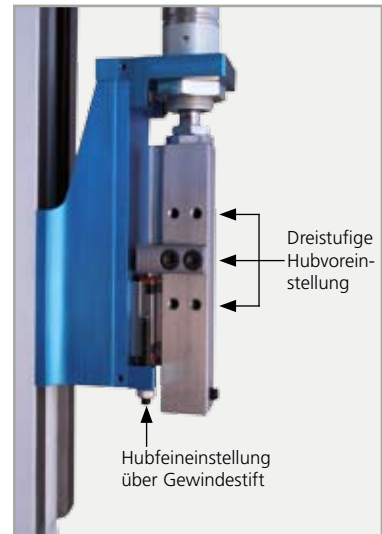



MicroPress 190-60-63

Typ MicroPress			30-60-63	40-60-63	70-60-63	120-60-63	190-60-63	290-60-63	480-60-63	750-60-63
Druckkraft		N	30	40	70	120	190	290	480	750
Arbeitshub		mm	5-60	5-60	5-60	5-60	5-60	5-60	5-60	5-60
Ausladung	A	mm	63	63	63	63	63	63	63	63
Arbeitshöhe	B	mm	43 - 208	43 - 208	43 - 208	43 - 208	43 - 208	43 - 208	43 - 208	43 - 208
Tischgröße	CxD	mm	100 x 65	100 x 65	100 x 65	100 x 65	100 x 65	100 x 65	100 x 65	100 x 65
Nutbreite ähnlich DIN 650		mm	10	10	10	10	10	10	10	10
Stößelbohrung Ø x Tiefe	E	mm	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25	10 ^{H7} x 25
Stößelfläche	F	mm	21 x 21	21 x 21	21 x 21	21 x 21	21 x 21	21 x 21	21 x 21	21 x 21
Luftanschluss			M5	M5	M5	M5	G ¹ / ₈ "	G ¹ / ₈ "	G ¹ / ₈ "	G ¹ / ₄ "
Luftverbrauch/60mm Hub		l	0,04	0,06	0,08	0,16	0,24	0,38	0,64	1,0
Platzbedarf	CxG	mm	110 x 164	110 x 164	110 x 164	110 x 164	110 x 164	110 x 164	110 x 164	110 x 164
Ständerhöhe	K	mm	355	355	355	355	355	355	355	355
Gewicht		kg	ca. 9,5	ca. 10	ca. 10	ca. 11	ca. 11	ca. 12	ca. 12	ca. 12

Extras (siehe Seite 7)		Bei Bestellung bitte angeben.								
Tischbohrung 12 ^{H7}		TB	TB	TB	TB	TB	TB	TB	TB	TB


ips hydro-pneumatische Pressen werden nur mit Druckluft angetrieben und schalten den hydraulischen Krafthub selbsttätig zu. Sie vereinen die Vorteile von pneumatischen und hydraulischen Pressen. Im pneumatisch angetriebenen Eilhub wird das Werkstück mit geringer Kraft schnell angefahren. Der hydraulische Krafthub setzt dann bei Widerstand automatisch ein.


Deshalb wird insbesondere bei diesen Modellen die eingesetzte Energie am wirtschaftlichsten genutzt. Die Funktion von hydro-pneumatischen Pressen wird auf der folgenden Seite beschrieben. Da ips hydro-pneumatische Pressen kein Hydraulikaggregat benötigen, lassen sie sich auch auf engstem Raum einsetzen. Alle hydro-pneumatischen Pressen sind mit den ips Standardsteuerungen oder mit Steuerungen nach Kundenspezifikation lieferbar.

Die Bearbeitung von Blechen, Leiterplatten oder anderen sperrigen Teilen verlangt eine größere Ausladung der Pressen. XL-HP Pressen mit 300 mm Ausladung ermöglichen die Bearbeitung auch dieser Teile. Für Maße, die außerhalb des Standards liegen, können Pressen mit Ständern in Schweißkonstruktion nach Ihren Wünschen gefertigt werden.

Qualitätsmerkmale:

- Verdrehgesicherter, gehärteter Stößel
- Lange, gehonte Stößelführung für höchste Präzision
- Zwei Krafthublängen stehen als Standard zur Verfügung
- Einfache Höhenverstellung des Pressenkopfs über eine Gewindespindel und Winkelgetriebe
- Seitlich angebrachtes Maßband zum schnellen Reproduzieren von Einstellungen bei Werkzeugwechsel
- Geräuscharm: unter 75 dB

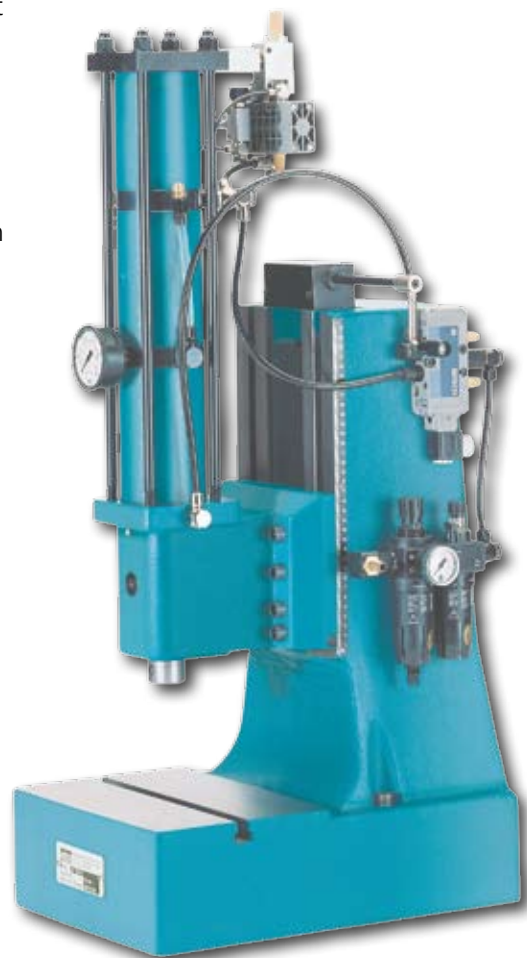

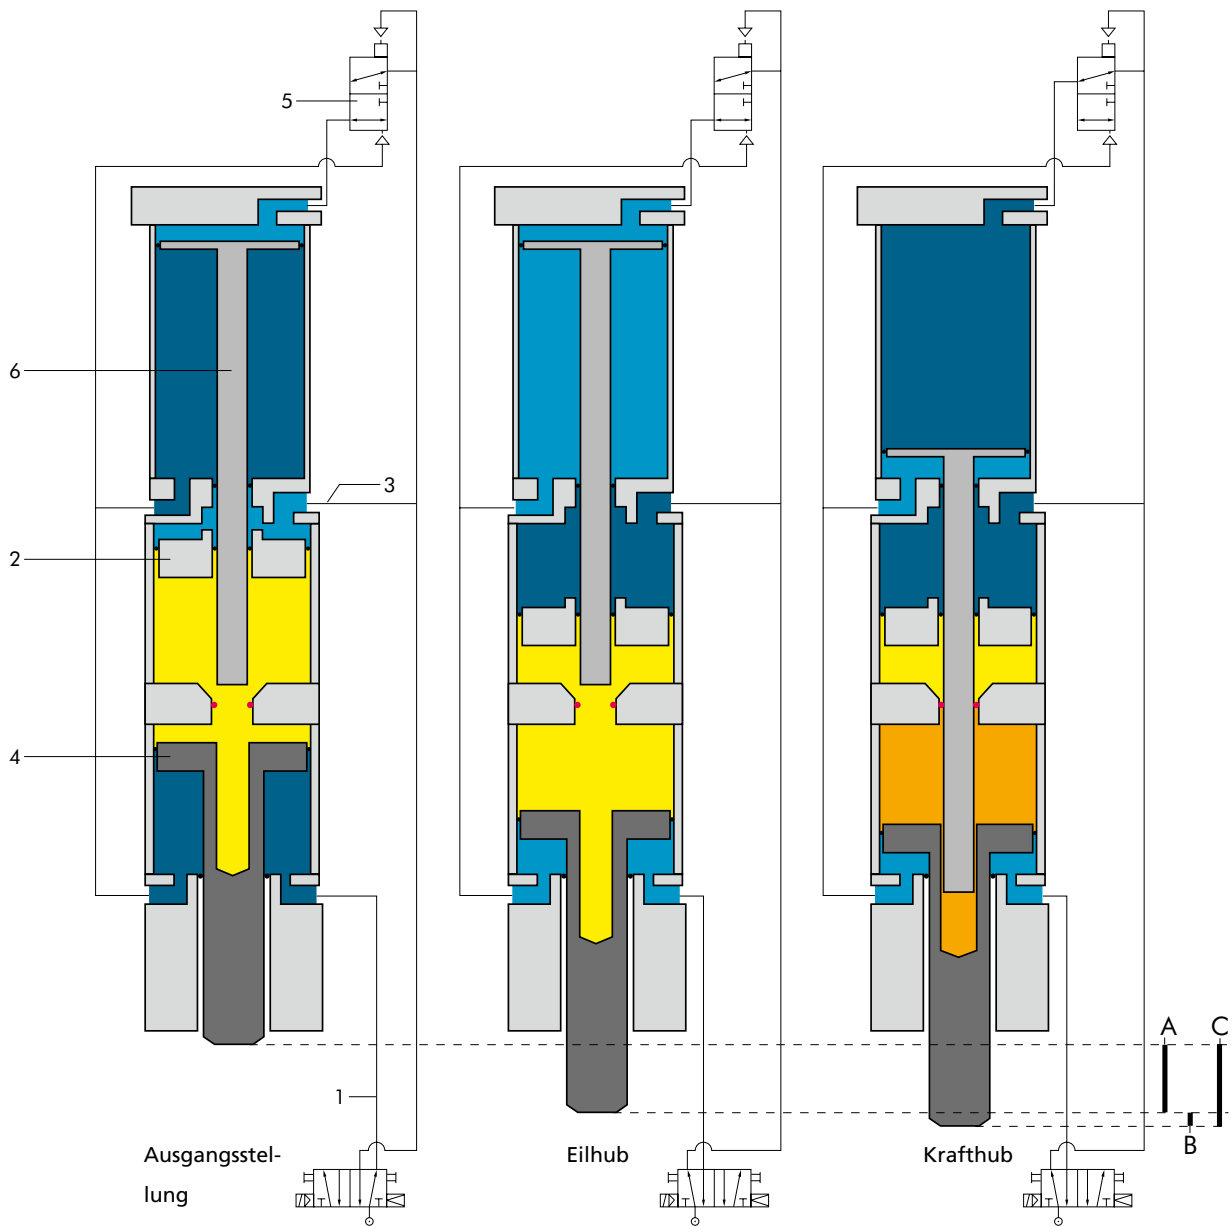

Funktionsbeschreibung:

Ausgangsstellung:

Druckluftleitung (1) ist mit Druckluft beaufschlagt, das restliche System ist druckfrei.

Eilhub (A):

Der Eilhubkolben (2) wird über den Druckluftanschluss (3) beaufschlagt. Der Kolben fährt aus und drückt über das Öl den Krafthubkolben (4) mit großer Geschwindigkeit nach unten bis auf das Werkstück.

- Öl ohne Druck
- Öl unter Druck
- Luft ohne Druck
- Luft unter Druck

- A = Eilhub
- B = Krafthub
- C = Gesamthub








Krafthub (B):

Die Umsteuereinheit (5) schaltet jetzt selbsttätig um, der Plunger (6) wird mit Druckluft beaufschlagt, fährt aus und schließt die Ölkammer. Die Kraftübersetzung findet statt. Der Stößel (4) fährt mit verminderter Geschwindigkeit und erhöhter Kraft im Krafthub aus.


Rückhub (C):

Systemumkehr, alle Kolben fahren gleichzeitig mit pneumatischer Kraft zurück.


Die Extras

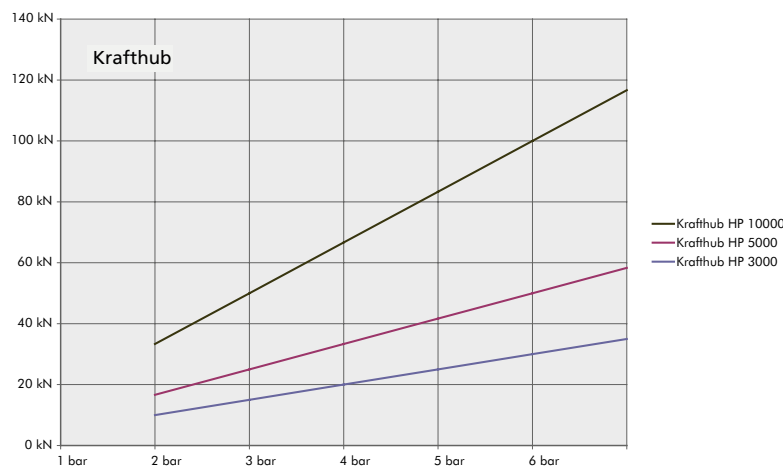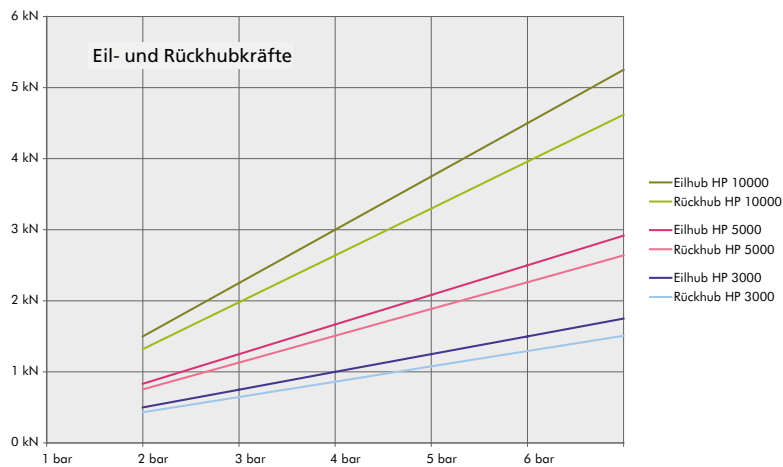


HP-Serie

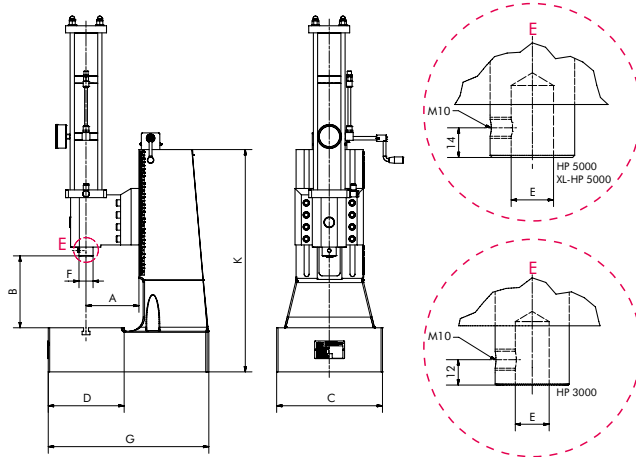


XL-HP-Serie

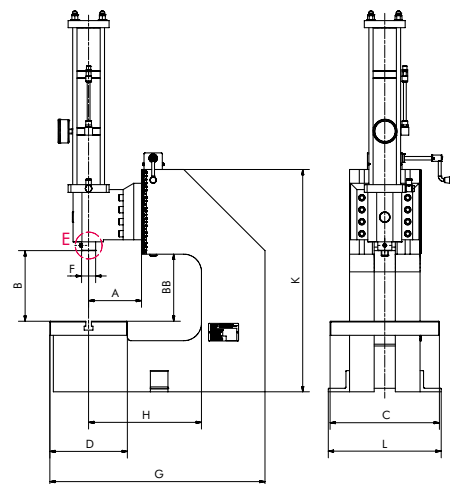

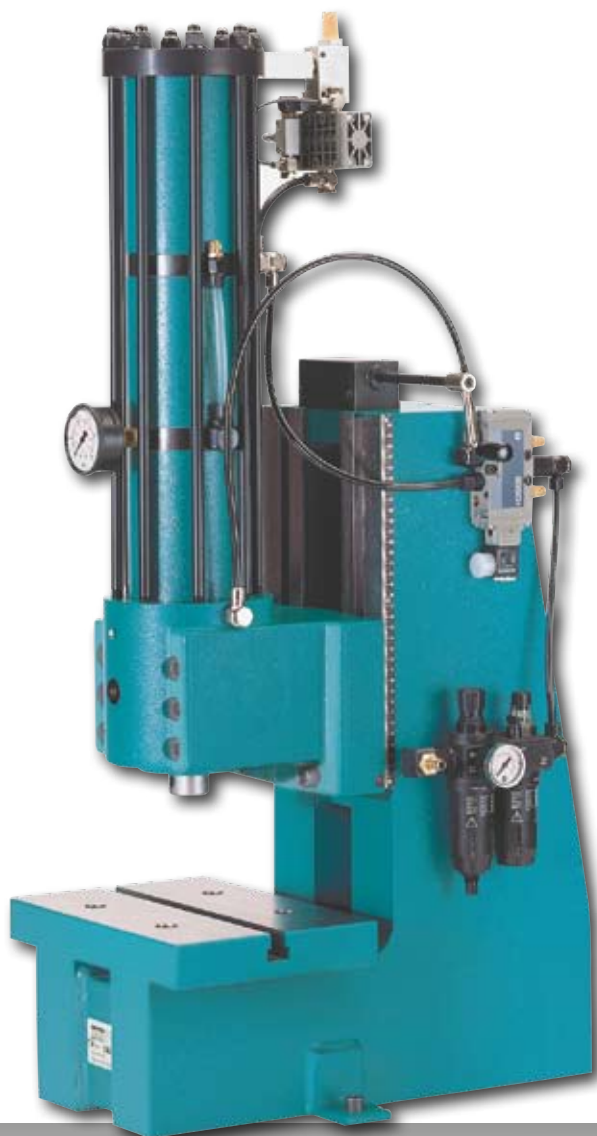

HP 10000 HV

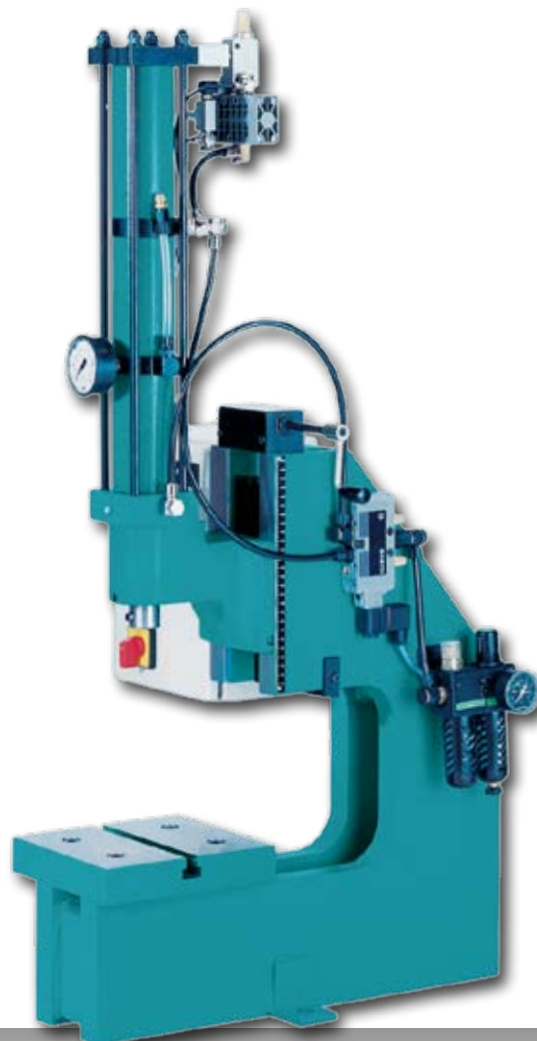

XL-HP 3000 HV

Typ			HP 3.000 HV	HP 5.000 HV	HP 10.000 HV	XL-HP 3.000 HV	XL-HP 5.000 HV	XL-HP 10.000 HV
Druckkraft		kN	30	50	100	30	50	100
Arbeitshub		mm	40	50	50	40	50	50
davon Krafthub*		mm	4/8	5/10	5/10	4/8	5/10	5/10
Eilhubkraft bei 6 bar		kN	1,5	2,5	4,5	1,5	2,5	4,5
Rückhubkraft bei 6 bar		kN	1,3	1,7	4,1	1,3	1,7	4,1
Ausladung	A	mm	130	150	150	130	150	150
Ausladung C-Gestell	H	mm	-	-	-	300	300	300
Arbeitshöhe	B	mm	123 - 322	119 - 320	117 - 312	189 - 327	145 - 235	145 - 235
Arbeitshöhe C-Gestell	BB	mm	-	-	-	158	190	190
Tischgröße	CxD	mm	200 x 190	300 x 210	310 x 220	200 x 220	310 x 220	310 x 220
Nutbreite ähnlich DIN 650		mm	14	14	14	14	16	16
Stößelbohrung Ø x Tiefe	E	mm	16 ^{H7} x 30	20 ^{H7} x 34	20 ^{H7} x 34	16 ^{H7} x 30	20 ^{H7} x 34	20 ^{H7} x 34
Stößel Ø	F	mm	35	40	40	35	40	40
Luftanschluss			G 1/4"	G 1/4"	G 1/4"	G 1/4"	G 1/4"	R 1/4"
Platzbedarf	LxG	mm	200 x 385	300x455	310 x 500	200 x 560	320 x 610	320 x 610
Ständerhöhe	K	mm	580	630	650	630	630	630
Gewicht		kg	ca. 78	ca. 163	ca. 287	ca. 184	ca. 241	ca. 311

* Bei Bestellung Hublänge angeben.

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.




ips pneumatische und manuelle Schiebetische erleichtern Einlegearbeiten und erhöhen somit die Wirtschaftlichkeit von Montageprozessen.

Die Vorteile:

- Das Einlegen erfolgt außerhalb des Gefährdungsbereichs
- Vormontage von Teilen ist ohne räumliche Behinderung durch die Presse möglich
- Vielseitige Einsatzmöglichkeiten für Automatisierungs- und Zustellaufgaben
- Präzises Positionieren von Werkstücken


Weitere Qualitätsmerkmale:

- Schlittenführung spielfrei einstellbar
- Hochbelastbare und präzise Kreuzrollenführung
- Beidseitige Endlagendämpfung
- ips Schiebetische können quer oder längs eingebaut werden
- Einfach zu automatisieren
- Selbsthaltend in der Endlage

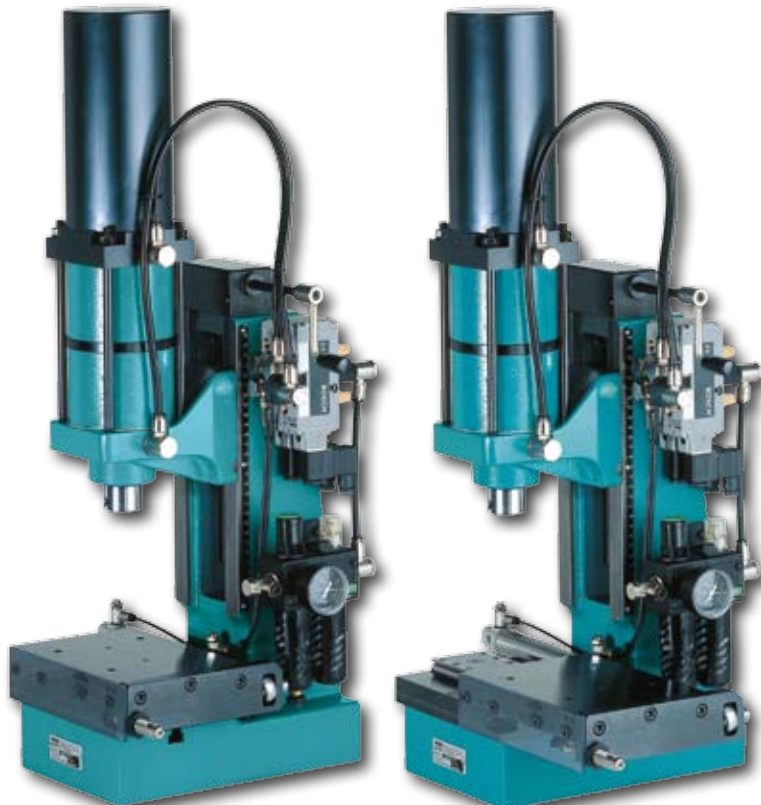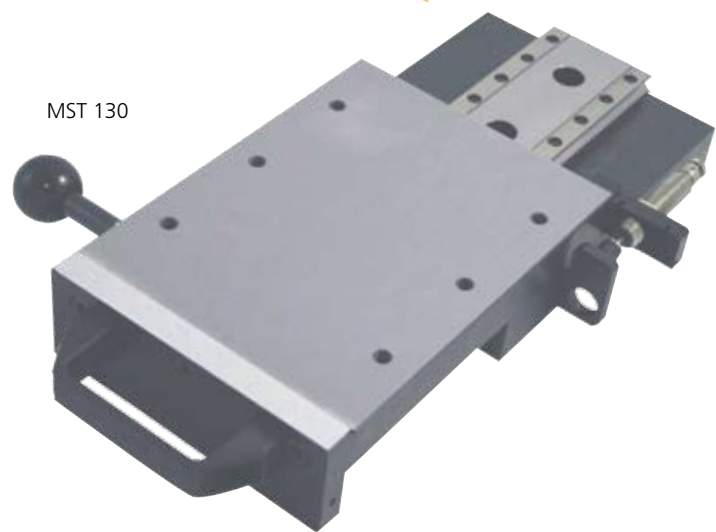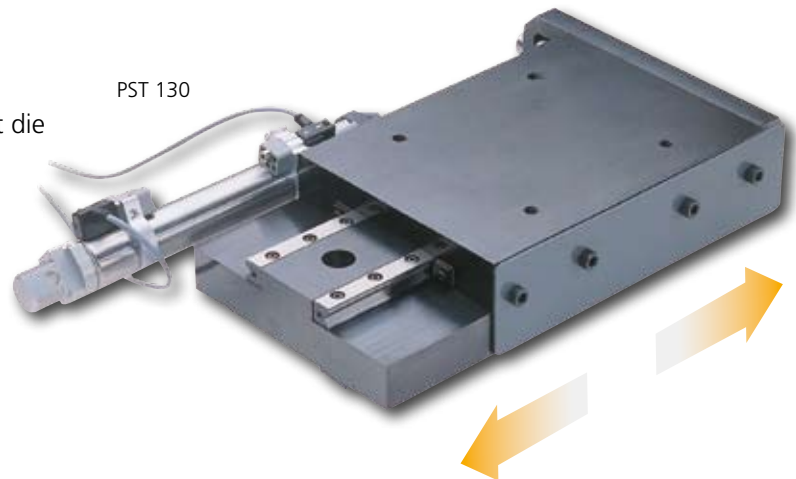

Anwendungsbeispiel
PST 130 eingefahren


PST 130 ausgefahren

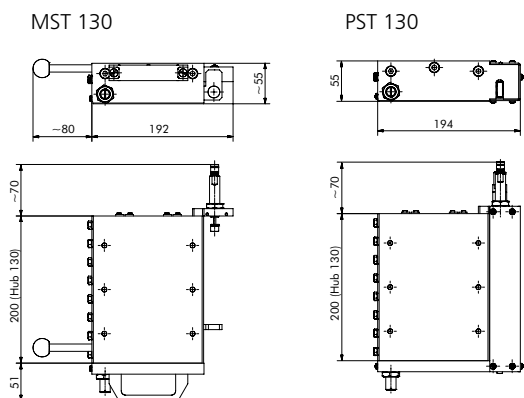


Typ		MST 130	PST 130	Geeignet für
Hub	mm	130	130	alle ips Pressen ab 100 mm Ausladung
Belastbarkeit	kN	50	50	

Steuerungen des Typs MPS-1 sind gemäß der EG Maschinenrichtlinie 2006/42/EG baumustergeprüft und zugelassen, um mit **ips** Pressen an Arbeitsplätzen mit Handbestückung und offenen Werkzeugen zu arbeiten. Die sowohl elektrisch als auch pneumatisch redundant aufgebaute Steuerung gibt Ihnen hier Sicherheit.


MPS-1 Typ Steuerungen bestehen aus einem elektrischen Sicherheitsmodul mit zwei Handtastern und elektronischen, 5-stelligen Stückzähler. Mittels eines Schlüsselschalters kann vom Zweihand-Modus auf ein externes Startsignal für die Presse, z.B. einem Fußschalter, umgeschaltet werden, wenn ein sicheres Werkzeug zum Einsatz kommt. Der Fußschalter o.ä. gehört bei der MPS-1 Typ Steuerung nicht zum Lieferumfang.




MPS-1
Grundversion für den Zweihand Betrieb.




MPS-1 T
MPS-1 Steuerung erweitert um die Funktion Haltezeit. Wenn die Presse die Endlage erreicht hat, kann über ein Zeitglied eingestellt werden, wann der Rückhub erfolgen soll.



MPS-1 PST
Dieser MPS-1 Steuerungstyp wird verwendet, um zusätzlich zur Presse einen pneumatischen Schiebetisch mitanzusteuern. Der Lieferumfang beinhaltet auch die Funktion Haltezeit (siehe MPS-1 T)



MPS-1 TPC
MPS-1 Steuerung zusätzlich mit dem Modul zur Kraft/Weg Überwachung TPC-MIDI.

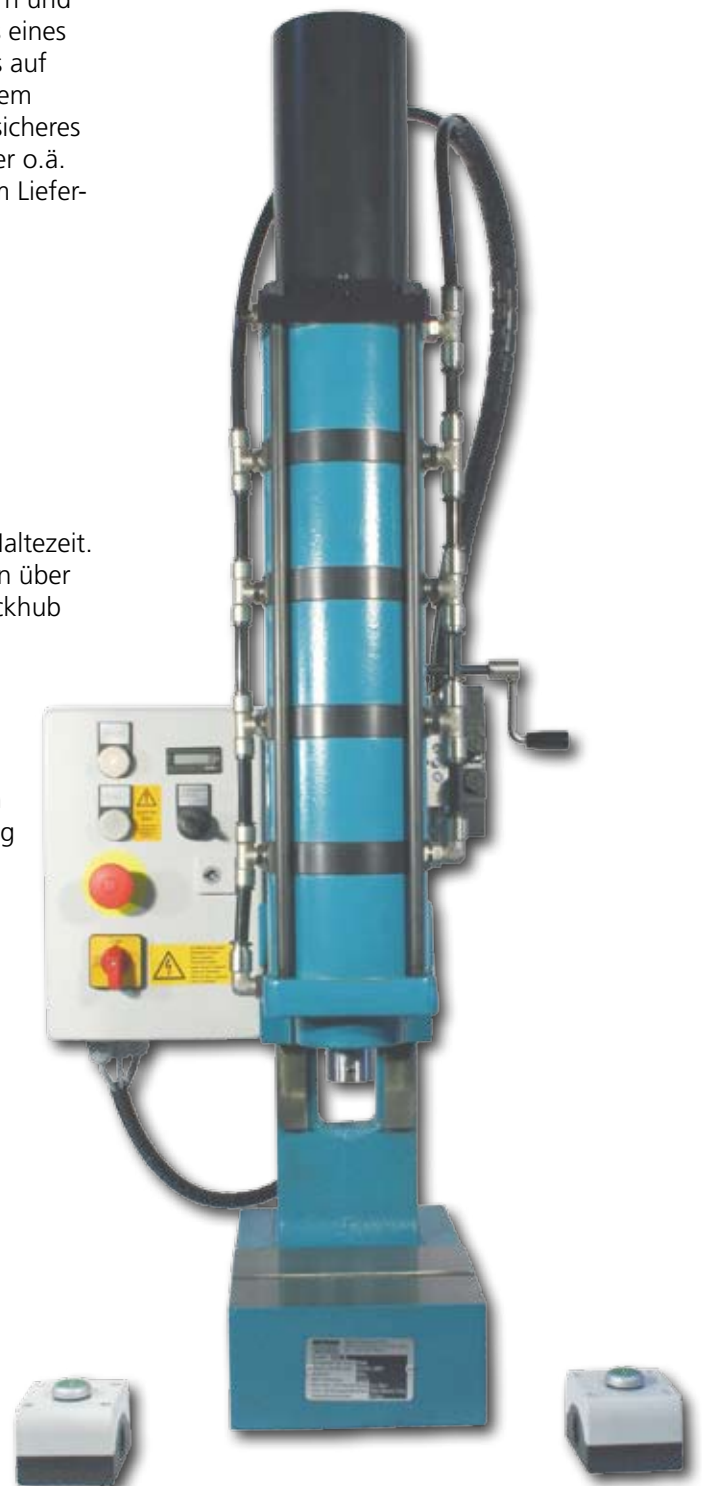

Anwendungen:

Füge- und Montageprozesse mit Pressen müssen heute sicher und möglichst ohne nachträgliche Kontrolle durchgeführt werden. Vorgegebene Parameter, die den Einpressvorgang definieren, müssen beim Produzieren eingehalten werden. Nur so kann die Qualität und Sicherheit des hergestellten Produkts garantiert werden. Deshalb wird überall dort TPC-MIDI eingesetzt, wo gleichbleibende Fügeprozesse gefordert werden, deren Verlauf überprüft und gegebenenfalls mittels Software dokumentiert werden müssen.

TPC-MIDI überwacht den Einpressvorgang und vergleicht den tatsächlichen Verlauf mit den Vorgaben und bewertet ihn anschließend. Ausschussteile werden so sicher erkannt und können aussortiert werden.

TPC-MIDI kann sowohl zusammen mit Handhebelpressen als auch mit pneumatischen Pressen verwendet werden. Bei pneumatischen Pressen wird die Steuerung **MPS-1 TPC** zusammen mit einer SPS-Ansteuerung, der die baumustergeprüften Zweihand-Sicherheitssteuerung MPS-1 übergeordnet ist, ausgeliefert.

TPC-MIDI steht aber auch als reiner Systembaustein zur Verfügung, wenn ein SPS-Umfeld, z.B. in einer Automation schon vorhanden ist.

Die Vorteile:

- TPC-MIDI lässt sich über die Folientastatur oder komfortabel über die PC Software programmieren.
- TPC-MIDI speichert 8 verschiedene Messprogramme
- 3 Fenster pro Programm möglich
- Moderne Kurvenbewertung über frei parametrierbare Fenster
- 4 Fenstertypen: Einfädel-, Durchgangs- und Blockfenster, sowie eine Hüllkurve.
- Kraftmessung direkt im Kraftverlauf mit speziell für Pressen entwickelten DMS Sensor.
- Software zum Programmieren und Speichern von Messprogrammen
- Dokumentation jedes Einpressprozesses




Laptop nicht im Lieferumfang

DA 850-40-100 mit MPS-1 TPC

Überwachungs-Fenster

Mit TPC-MIDI können folgende Überwachungs-Fenster angelegt werden:

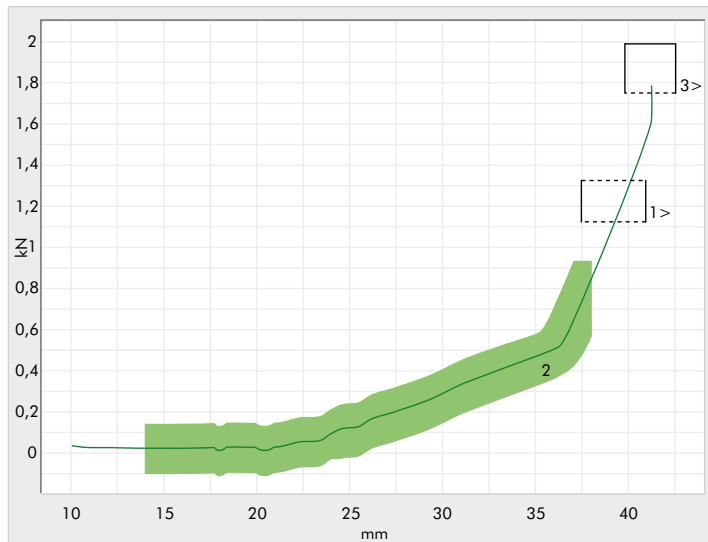

Durchlauf-Fenster (1)

Die Kraft/Weg Kurve muss das Fenster von der Eintritts- zur Austrittsseite wie definiert durchlaufen, ohne dass eine der anderen Fenstergrenzen verletzt wird. Ein- und Austrittsseite sind frei wählbar

Hüllkurve (2)

Die Messkurve muss sich durch die Hüllkurve ziehen und darf diese nicht verletzen. Die Hüllkurve wird über Teach-in eingelernt. Ihre X-Achsen Parameter und das Delta-Y, also der Toleranzbereich der Kraft, werden anschließend definiert.

Block-Fenster (3)

Das Blockfenster überwacht die Endwerte des Einpressverlaufs. Die Kraft/Weg Kurve muss bei diesem Fenstertyp in die vorgegebene Eintrittsseite eintreten und darf das Fenster nicht mehr verlassen.

Programmierbare Trigger Punkte können, falls es die Teile-Geometrie verlangt, definiert werden. Durch die Programmierung des Triggerpunkts werden die X-Achsen Positionen der Bewertungsfenster dem Einpressverlauf angepasst und beziehen sich dann auf den Trigger-Nullpunkt.

Gerne stellen wir Ihnen zur TPC-MIDI Prozessüberwachung weitere Information zur Verfügung.



TPC-MIDI Auswerteinheit mit Software Screenshot




Handarbeitsplatz mit TPC-MIDI angebaut an Kniehebelpresse EP 500-40

Das Press & Tool Concept wurde in der Schweiz von einem namhaften Pressenhersteller entwickelt und 2008 von ips pressen übernommen und weitergeführt. Es steht nun für Schweizer Technologie made in Germany.

Press & Tool Concept steht für ein abgerundetes Pressen- und Werkzeugprogramm für die effiziente Fertigung, schwerpunktmäßig in der Blechbearbeitung in Kraftbereichen von 10 kN – 35 kN.

Qualitätsmerkmale:




SOLID FRAME

Solide Gußständer in C-Form von hoher Stabilität und geringer Auffederung bei Stanzvorgängen ermöglichen bei vielen Arbeitsverfahren den Einsatz kostengünstiger Freischnitt-Werkzeuge.





MICRO ADJUST

Die präzise Höhenverstellung des Pressentischs vereinfacht das Einrichten der Press & Tool Concept Pressen und erhöht deren Einsatzmöglichkeiten. Die serienmäßige Skalenscheibe ermöglicht eine Ablesegenauigkeit von 0,1 mm.



QUICK TOOL CHANGE

Das standardisierte Werkzeugbefestigungssystem erlaubt, dass die verschiedenen Werkzeuge aus dem Press & Tool Concept mit wenigen Handgriffen schnell gewechselt werden können.




WERKZEUGSYSTEM


Basis Werkzeugsystem für Standard Anwendungen der Blechbearbeitung wie Stanzen, 90° Biegen, Radienstanzen etc.

Die Komponenten des Press & Tool Concept

Hand-Kniehebelpressen

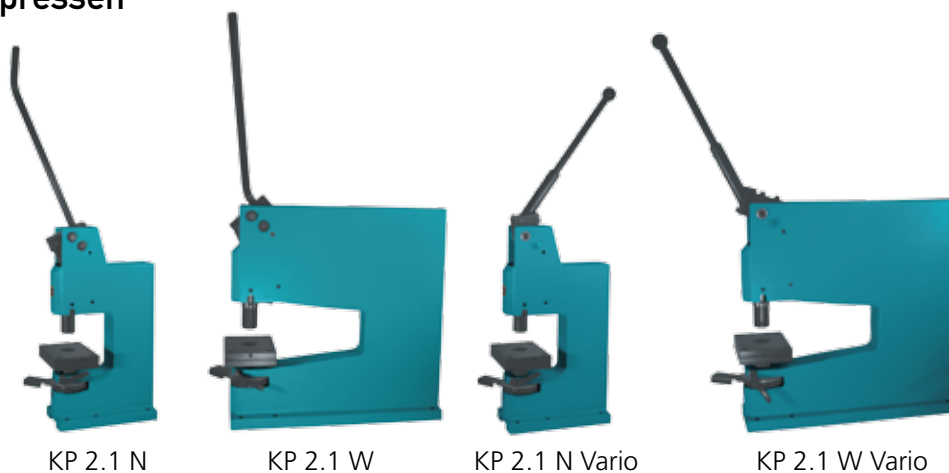





Druckluft-Kniehebelpressen

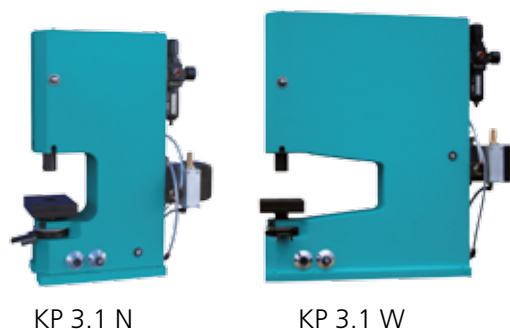

Werkzeugsystem W 14

Stanz-Werkzeug	Ausklink-Werkzeug	Bandschnitt-Werkzeug	Radien-Stanz-Werkzeug
Winkel-Profil-Stanz-Werkzeug	Kombi-Eckstanz-Werkzeug	Profil-Schienen-Werkzeug	Profil-Trenn-Werkzeug

KP 3.1 Serie






Die Standard Kniehebelpresse des Press & Tool Concepts

Ideal zum Stanzen, Biegen, Montieren, Prägen, Pressen, Nieten, Richten, Kleben.

- Einfache Handhabung
- Werkseits eingestellte wiederholgenaue Endlage
- Das MICRO ADJUST System erlaubt schnelle und genaue Höhenverstellung des Pressentischs
- Ablesegenauigkeit 0,1 mm
- Fixierung durch Schnellspannhebel ohne zusätzliche Werkzeuge
- Ideal zusammen mit dem Werkzeugsystem W 14
- Adapterstück im Lieferumfang



Montierter Abstreifbügel (Sonderzubehör)

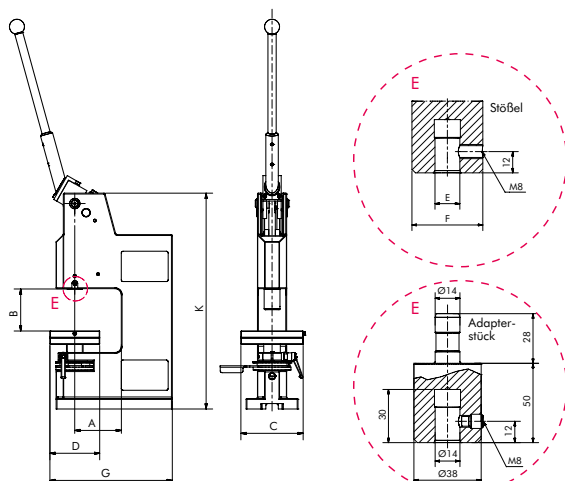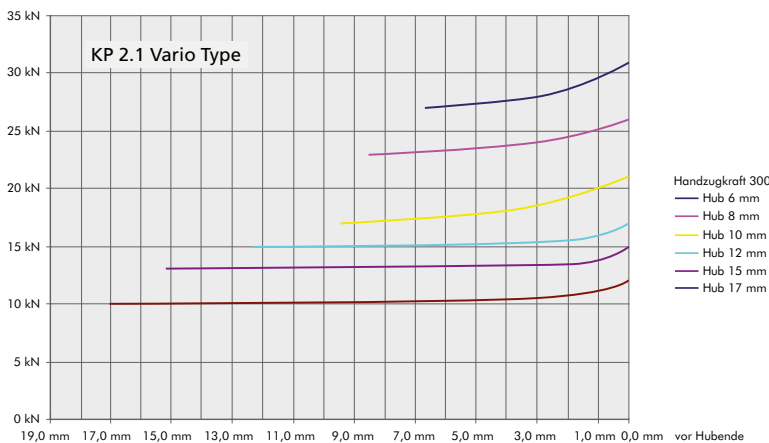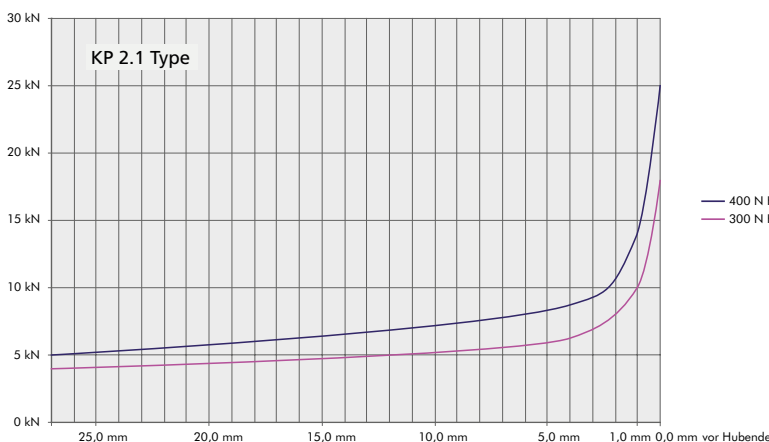



KP 2.1 N





KP 2.1 N Vario mit einstellbarem Kraftverlauf

KP 2.1 N

KP 2.1 W Vario



Typ			KP 2.1 N	KP 2.1 W	KP 2.1 N Vario	KP 2.1 W Vario
Druckkraft		kN	25	25	10 - 30	10 - 30
Arbeitshub	C	mm	27	27	6 - 17	6 - 17
Ausladung	A	mm	112	275	112	275
Arbeitshöhe max.	B	mm	122	122	112	117
Verstellweg Tisch		mm	70	70	70	70
Tischgröße	D x H	mm	120 x 150	120 x 150	120 x 150	120 x 150
Stößelbohrung Ø x Tiefe		mm	14 ^{H7} x 30	14 ^{H7} x 30	14 ^{H7} x 30	14 ^{H7} x 30
Stößel Ø		mm	40 ^{H7}	40 ^{H7}	40 ^{H7}	40 ^{H7}
Platzbedarf	D x E	mm	125 x 280	125 x 520	125 x 280	125 x 520
Ständerhöhe	K	mm	520	520	520	520
Gewicht		ca. kg	35	85	35	85

Die Extras



Die Kniehebel-Druckluftpresse der KP 3.1 Serie

- Antrieb durch doppelt wirkenden Pneumatikzylinder
- Werkseits eingestellte, wiederholgenaue Endlage
- Verdrehgesicherter Stößel
- Serienmäßig mit Adapterstück zur Überbrückung der Arbeitshöhe
- Die Hubbegrenzung erlaubt dem Anwender geringe Hublänge für sicheres Arbeiten einzurichten
- Das MICRO ADJUST System erlaubt schnelle und genaue Höhenverstellung des Pressentischs
- Ablesegenauigkeit 0,1 mm
- Verdrehgesichert
- Ideal zusammen mit dem Werkzeugsystem W 14
- Adapterstück im Lieferumfang

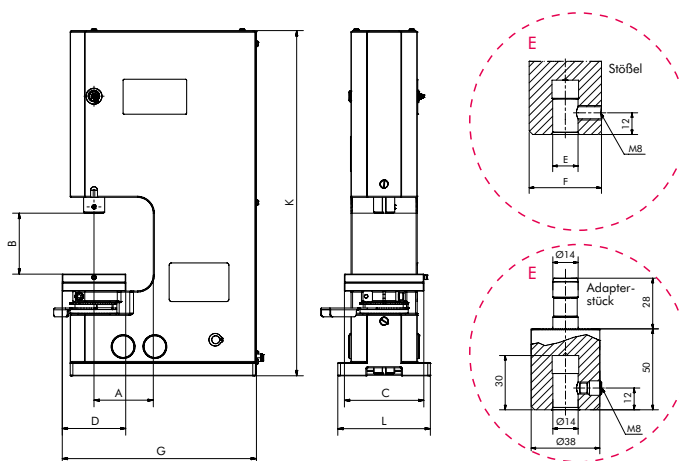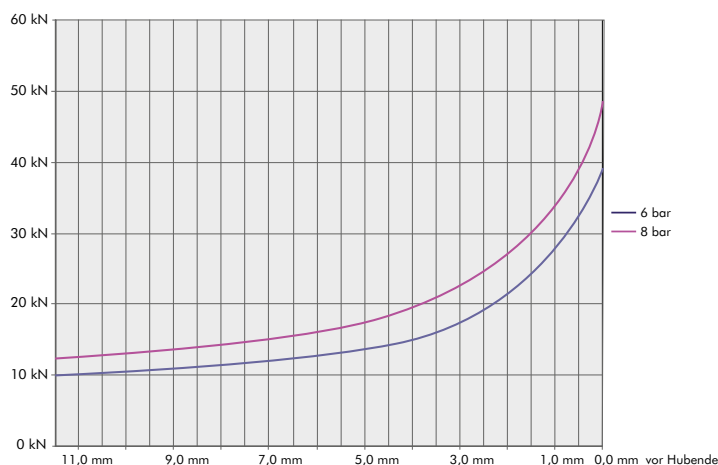

KP 3.1 N
 KP 3.1 W mit 275 mm Ausladung



KP 3.1 N



KP 3.1 W

Typ			KP 3.1 N	KP 3.1 W
Druckkraft		kN	35	35
Arbeitshub		mm	6 - 27	6 - 27
Ausladung	A	mm	112	275
Arbeitshöhe	B	mm	55 - 145	55 - 145
Tischgröße	CxD	mm	120 x 150	120 x 150
Stößelbohrung Ø x Tiefe	E	mm	14 ^{H7} x 30	14 ^{H7} x 30
Stößel Ø	F	mm	40 ^{H7}	40 ^{H7}
Platzbedarf	CxG	mm	175 x 350	175 x 565
Ständerhöhe	K	mm	650	720
Gewicht		kg	75	125

Ventil und Wartungseinheit nur im Lieferumfang mit Steuerung. Die Ausführung kann abweichen.

Berechnung der Scherkräfte

Die benötigte Kraft zum Stanzen berechnet sich aus folgenden Größen:

τ_{aBmax} = Scherfestigkeit in N/mm^2 des Werkstoffs

l = Schnittkantenlänge in mm

s = Materialstärke in mm

Bei parallel liegenden Schneidkanten von Stempel und Matrize berechnet sich die benötigte Scherkraft wie folgt:

$$F = \tau_{aBmax} \cdot l \cdot s$$

Berechnungsbeispiel:

Stanzen eines Lochs \varnothing : 8,5 mm in 1,5 mm starkes

AlMg 5 halbhart

($\tau_{aBmax} = 240 N/mm^2$)


$$F = 8,5 \text{ mm} \cdot \pi \cdot 1,5 \text{ mm} \cdot 240 N/mm^2$$

$$F = 9608,4 \text{ N} \sim 9,6 \text{ kN}$$


Durch Schräg- oder Wellenschliff kann die benötigte Schneidkraft reduziert werden.

Schnittspiel:

Als Faustregel kann man ansetzen, dass das Schnittspiel 10% von der Materialstärke s betragen sollte. Das Werkzeugsystem W 14 wird mit einem Standard Schnittspiel von 0,1 mm ausgeliefert. Insbesondere bei weichen Materialien, Kunststoffen und dünnen Folien muss das Schnittspiel angepasst werden.

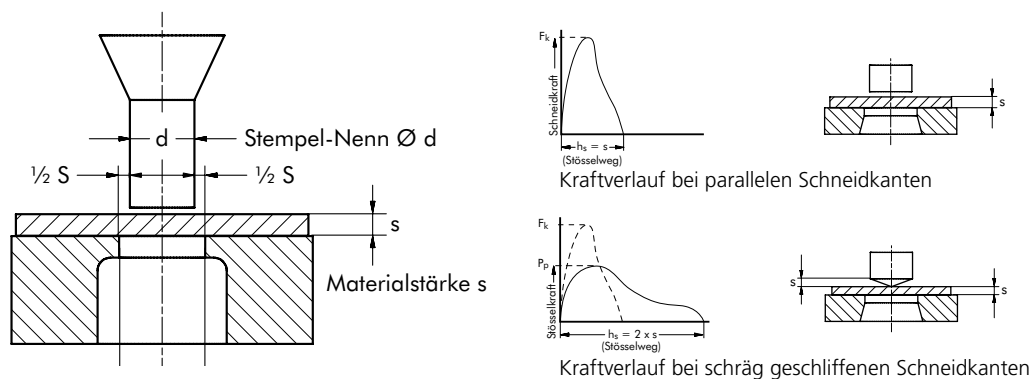

Materialauswahl mit Scherfestigkeit τ_{aBmax} in N/mm^2						
Aluminium	Al 99 weich	60 - 80	Vergütungsstahl	Ck 22	340 - 400	
	Al 99 halbhart	60 - 100		Ck 35	400 - 480	
Alu-Legierungen	Al Mo 3 weich	150 - 200		Ck 45	480 - 580	
	Al Mg 5 weich	190 - 210		Ck 60	560 - 680	
	Al Mg 5 halbhart	200 - 240		Rostfreier Stahl	V2A	600 - 900
	Al Mg 7 weich	240 - 280		Federbandstahl hart		800 - 1200
	Al Mg 7 halbhart	280 - 320		Messing	Ms 58	300 - 450
Stahl-Feinblech	T St 10	220 - 400		Kupfer	Cu	200 - 230
	U St 12	220 - 340	Polyvinylchlorid weich	PVC 1	20 - 180	
	U St 14 2	80 - 320	Polyvinylchlorid hart	PVC	160 - 250	
Baustahl	St 37	300 - 360	Epoxy (Printmaterial)		180 - 300	
	St 50	400 - 480	Hartpapier		70 - 90	
	St 60	480 - 580				
	St 70	560 - 680				

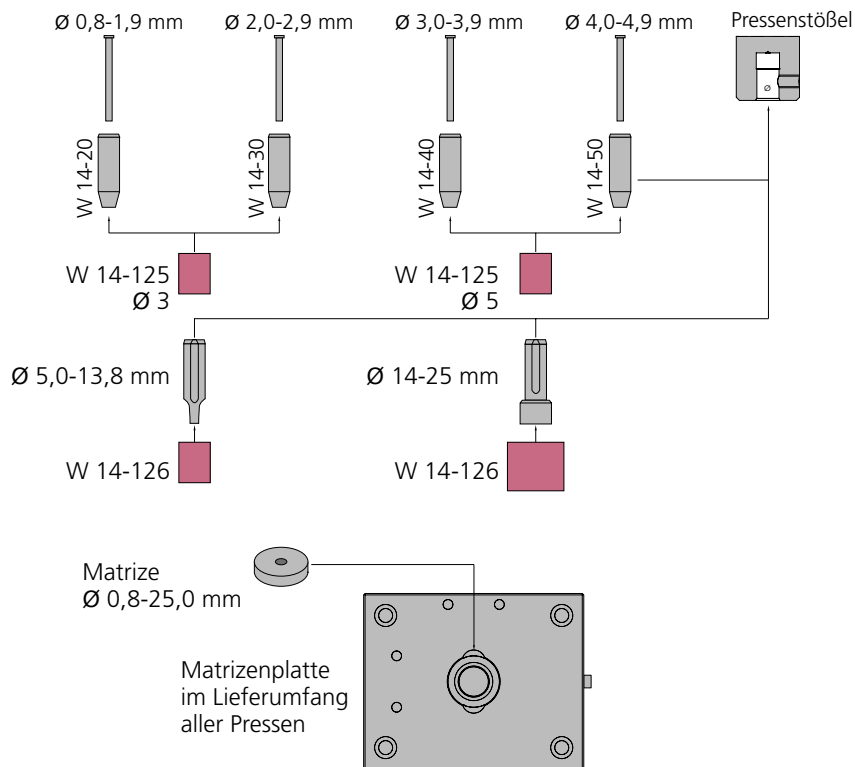


Rundlochwerkzeuge Ø 0,8 - 5 mm	Ø 0,8 - 1,9	Ø 2,0 - 2,9	Ø 3,0 - 3,9	Ø 4,0 - 4,9
	Stempel Stufung 0,1 mm W 14-298 bis W 14-215	Stempel Stufung 0,1 mm W 14-316 bis W 14-325	Stempel Stufung 0,1 mm W 14-426 bis W 14-425	Stempel Stufung 0,1 mm W 14-536 bis W 14-550
	Stempelhülse W 14-20	Stempelhülse W 14-30	Stempelhülse W 14-40	Stempelhülse W 14-50
	Abstreifer W 14-125 Ø 3	Abstreifer W 14-125 Ø 3	Abstreifer W 14-125 Ø 5	Abstreifer W 14-125 Ø 5
	Matrizen W 14-3508 bis W 14-3515	Matrizen W 14-3516 bis W 14-3525	Matrizen W 14-3526 bis W 14-3535	Matrizen W 14-3536 bis W 14-3550


Rundlochwerkzeuge Ø 5 - 13,8 mm	
	Stempel Stufung 0,0/0,2/0,5/0,8 W 14-1450 (5,0) bis W 14-14138 (13,8)
	Abstreifer W 14-126 rot (Federweg 33%) W 14-126 braun (Federweg 20%)
	Matrizen W 14-3550 bis W 14-35138


Rundlochwerkzeuge Ø 14 - 25 mm	
	Stempel Stufung 0,0/0,2/0,5/0,8 W 14-1450 (5,0) bis W 14-14138 (13,8)
	Abstreifer W 14-126 rot (Federweg 33%) W 14-126 braun (Federweg 20%)
	Matrizen W 14-3550 bis W 14-35138

Langloch-Schnittgarnituren	
	Stempel Stufung 0,0/0,2/0,5/0,8 W 14-1450 (5,0) bis W 14-14138 (13,8)
	Abstreifer W 14-126 rot (Federweg 33%) W 14-126 braun (Federweg 20%)
	Matrizen W 14-3550 bis W 14-35138

Vierkant- und Rechteck-Schnittgarnituren	
	Stempel Stufung 0,0/0,2/0,5/0,8 W 14-1450 (5,0) bis W 14-14138 (13,8)
	Abstreifer W 14-126 rot (Federweg 33%) W 14-126 braun (Federweg 20%)
	Matrizen W 14-3550 bis W 14-35138

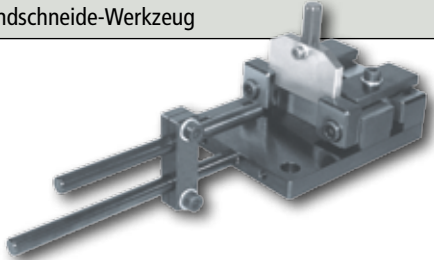Bandschneide-Werkzeug	
	bis 50 oder 100 mm Breite

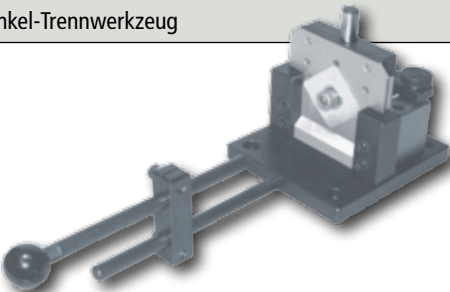Winkel-Trennwerkzeug	
	umstellbarer Trennstempel max. Schenkel-Schnittlänge 40 mm


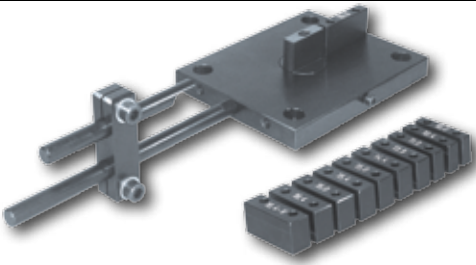
Profilschienen-Stanzwerkzeug mit 10 steckbaren Zentriereinsätzen	
	Stangenanschlag Abstreifer Matrize und Stempel nicht im Lieferumfang enthalten.

Profil-Trennwerkzeug	
	Grundwerkzeug mit Trennplatteneinsatz Trennform für Tragschienen NS 15 und NS 35/75 Stahlausführung nach DIN EN 50045 und DIN EN 50022. Bei Bestellung bitte Profilform angeben

Biegewerkzeug	
	Norm-Biegungen 90° Sonder-Biegewinkel oder -Biegeformen nach Kundenangaben Gesamtbreite 60 mm oder 120 mm. Bitte angeben.


Radien-Stanzwerkzeug drehbar	
	Werkzeuge für Schilder- und Front- plattenfabrikation R3/5/8/10 oder R5/10/15/20

90° Ausklinkwerkzeug

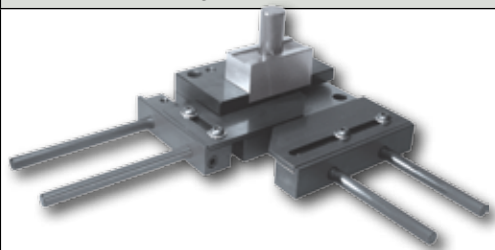



komplett mit einstellbaren
Schwenkanschlügen
Für Alucobond-Verarbeitung
Mit 2 auswechselbaren
Stempeln \varnothing 5,3

Kombi-Eckstanzwerkzeug





kompl. mit Anschlägen für
4 Anwendungen
Universelles Ecken-
Bearbeitungswerkzeug für
Al / St / V2A

Normanschlag Stangenausführung Typ: Z-100

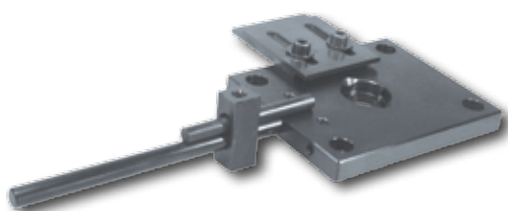



x-Achse 250 mm ohne Skala
y-Achse 40 mm ohne Skala

Normanschlag Plattenausführung Typ: Z-101

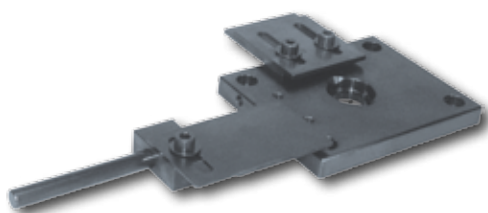


x-Achse 250 mm ohne Skala
y-Achse 40 mm ohne Skala

Koordinaten-Anschläge

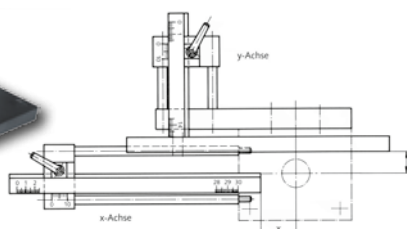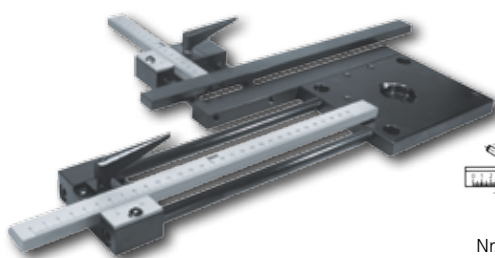

Nr. Z-102
Nr. Z-110-300
Nr. Z-120-520
Nr. Z-111-120
Nr. Z-121-255

x-Achse 300 mm Z-110-300
x-Achse 520 mm Z-120-520
y-Achse 120 mm Z-111-120
y-Achse 255 mm Z-121-255

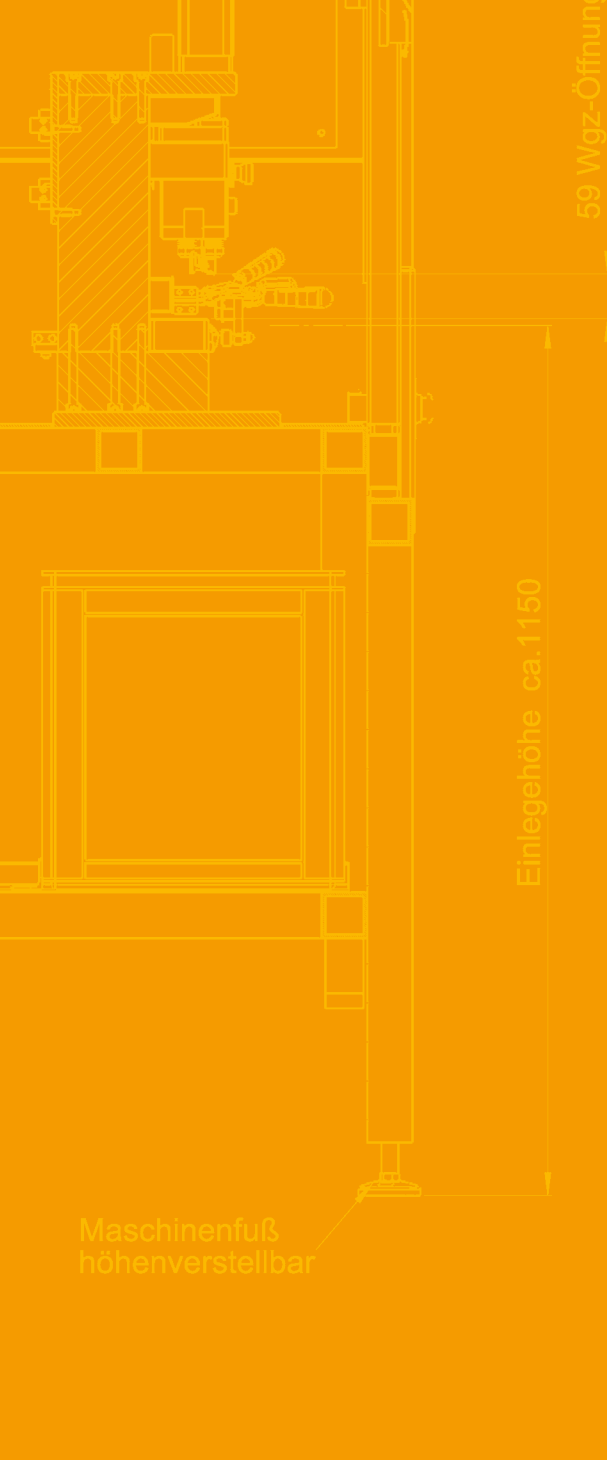

59 WgZ-Öffnung

Einlegehöhe ca.1150

Maschinenfuß
höhenverstellbar



Automatisch doppelwirkende Stanzvorrichtung zum Lochen
 nach unten laut Schnittbild, in der linken und rechten
 Schutzblende, gemäß Datensatz vom 08.06.2005,
 Material: PC/ABS, 2 mm dick, Rm ca. 60N/mm²,
 die Schutzblenden sind einzeln abschaltbar.

Wichtig:
 Der Arbeitsbereich der Vorrichtung ist nach Schließung der
 Schutzblende von unten (außer Abfalllöcher), seitlich,
 hinten und vorn komplett gekapselt.
 Die Vorrichtung ist offen,
 wenn sie auf Grund der Bauhöhe (2245)
 in der Position der Schneidwerkzeuge (1150)
 in Gefahr der Gefährdung auszuschließen.
 Die Not-Aus-Steuerung läßt sich nur auslösen bei eingelegtem Werkstück.

Farbgebung:
 Maschinengestell und Locheinheit in signalblau RAL 5005
 Schutzgitter u. Vertikalschützür in goldgelb RAL 1004

Stanzschrank u. übrige Komponenten wie Alu-Profile
 Elektrikbauteile, in den Herstellerfarben

Gewicht: ca. 800 kg


Schnittbild: M2:1
 gemäß anhängigem Datensatz des
 File: A 633 950 10



INTELLIGENT PUNCHING SOLUTIONS

Partner Programs //

8

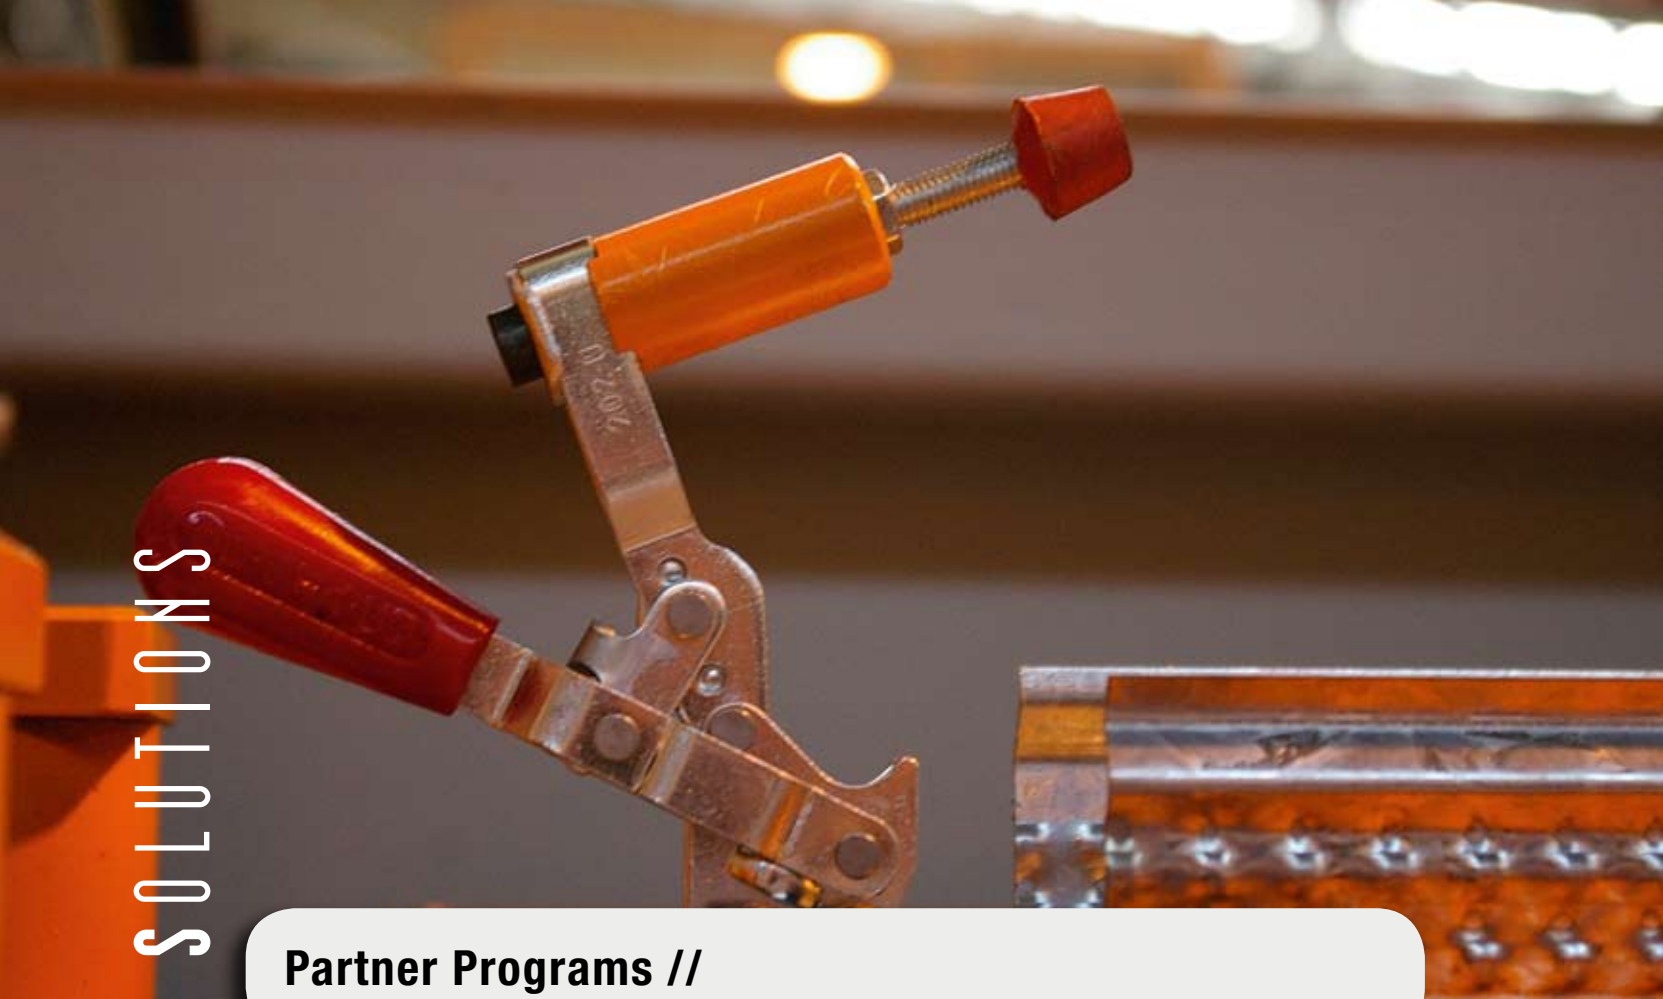

Partner Programs //

INTELLIGENT PUNCHING SOLUTIONS



1000

A-A



Kraftübersetzer
Typ: MULTIFLEX
E 100 K6, 6 bar

Farger & Joosten GmbH

2

Höhe ca. 1150


ips-werkzeugtechnik gmbh

T +49(0)7635/3155-800

F +49(0)7635/3155-880

info@ips-werkzeugtechnik.de

www.ips-werkzeugtechnik.de

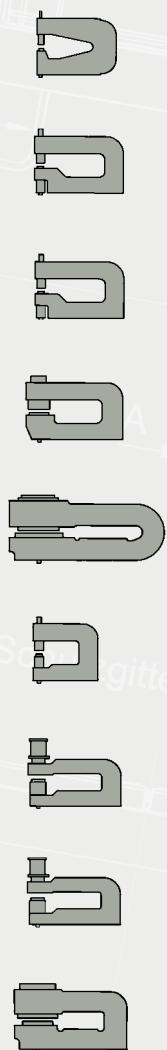

Stablerschuhe werden
mit einem Schild markiert

Stablgitter abschraubbar

Werkzeugschrank

Sesselblende, ge
Material: PC/ABS
Die Stempel sind

Hinweis:
Der Arbeitsbereich
Vertikalschutztüre v
hinten und vorn kom
Oben ist die Vorricht
jedoch ist auf Grund
und der Position der
eine Gefährdung aus
Die Steuer